



DATA SHEET		Date	10-Dec-12
Model	LFP240F-30-Y	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	H.MORITA

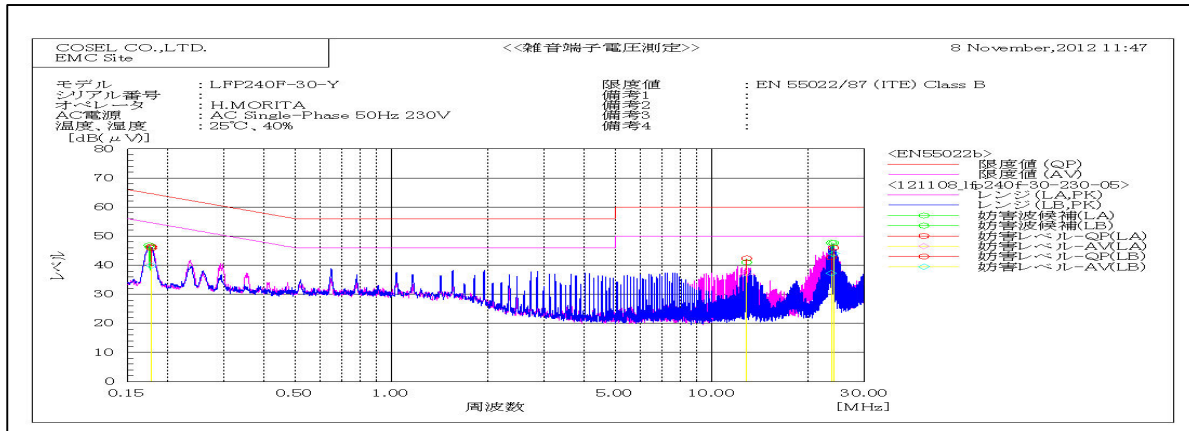


Frequency MHz	Line Phase	Reading dB(μV)		Factor dB	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/ Fail	Remark
		QP	AV		QP	AV	QP	AV	QP	AV		
23.62565	LB	20.7	15.2	22	42.7	37.2	60	50	17.3	12.8	Pass	
24.02575	LB	24.1	22.1	21.9	46	44	60	50	14	6	Pass	
0.17824	LA	29.4	23.5	16.9	46.3	40.4	64.6	54.6	18.3	14.2	Pass	
12.85885	LA	22.9	17.7	19.4	42.3	37.1	60	50	17.7	12.9	Pass	
0.17805	LB	28.9	22.9	17	45.9	39.9	64.6	54.6	18.7	14.7	Pass	

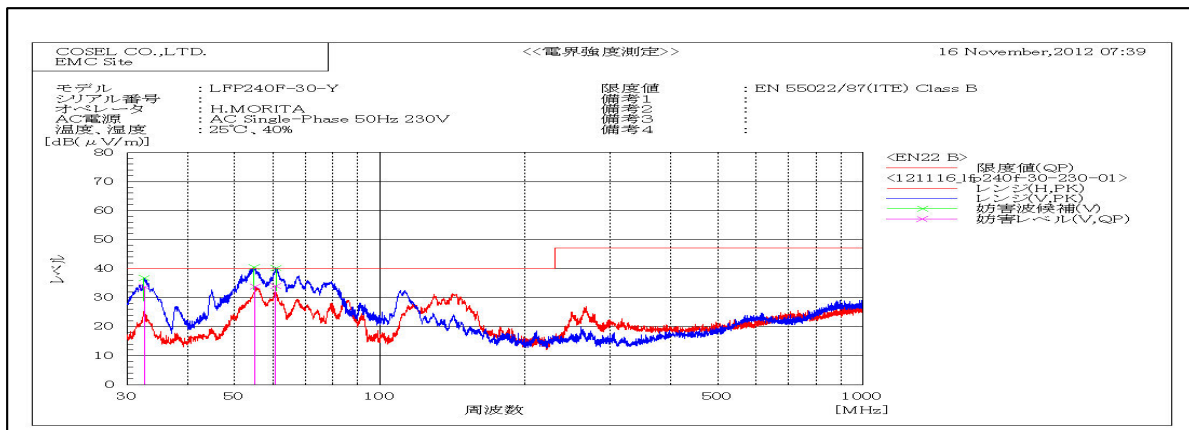

Frequency MHz	Polariz ation	Stabili ty	Readin g dB(μV)	Factor dB(1/m)	Level dB(μV/ m)	Limit dB(μV/ m)	Margin dB	Pass/ Fail	Height cm	Angle deg	Remark
			QP		QP	QP	QP				
32.59	V	Stable	50.2	-16.5	33.7	40	6.3	Pass	99	226	
55.092	V	Stable	48.9	-15.1	33.8	40	6.2	Pass	119	210	
60.765	V	Stable	49.6	-15.6	34	40	6	Pass	101	175	

DATA SHEET		Date	11-Dec-12
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	H.MORITA

1. Line conduction

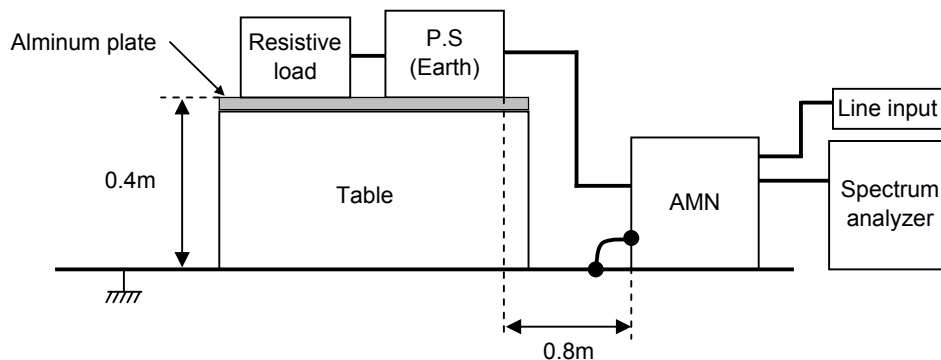

2. Radiated emission

