



DATA SHEET

Model		LFP240F-48-Y	Date	10-Dec-12
Test		EMI Line conduction & Radiated emission	Temp.	25 degreeC
			Humid.	40 %RH
			Tested by	H.MORITA

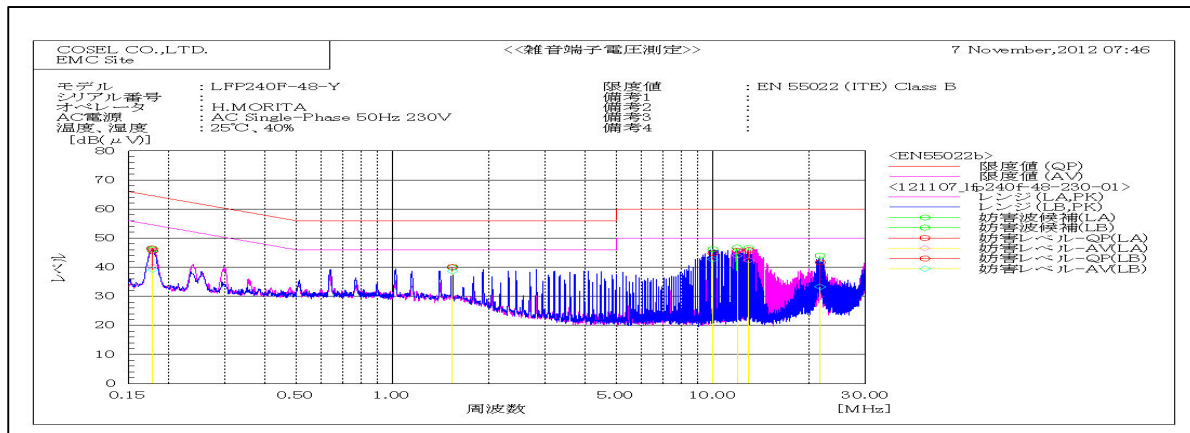


Frequency MHz	Line Phase	Reading dB(μV)		Factor dB	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/ Fail	Remark
		QP	AV		QP	AV	QP	AV	QP	AV		
11.92965	LA	26.7	24.9	19	45.7	43.9	60	50	14.3	6.1	Pass	
12.95915	LA	26.9	23.5	18.9	45.8	42.4	60	50	14.2	7.6	Pass	
0.1786	LB	28.7	22.1	17	45.7	39.1	64.6	54.6	18.9	15.5	Pass	
1.53865	LB	22.6	21.2	17.5	40.1	38.7	56	46	15.9	7.3	Pass	
10.01224	LB	26.2	24.1	18.6	44.8	42.7	60	50	15.2	7.3	Pass	
21.6683	LB	21	12.7	20.6	41.6	33.3	60	50	18.4	16.7	Pass	
0.17723	LA	29.6	23.3	16.9	46.5	40.2	64.6	54.6	18.1	14.4	Pass	

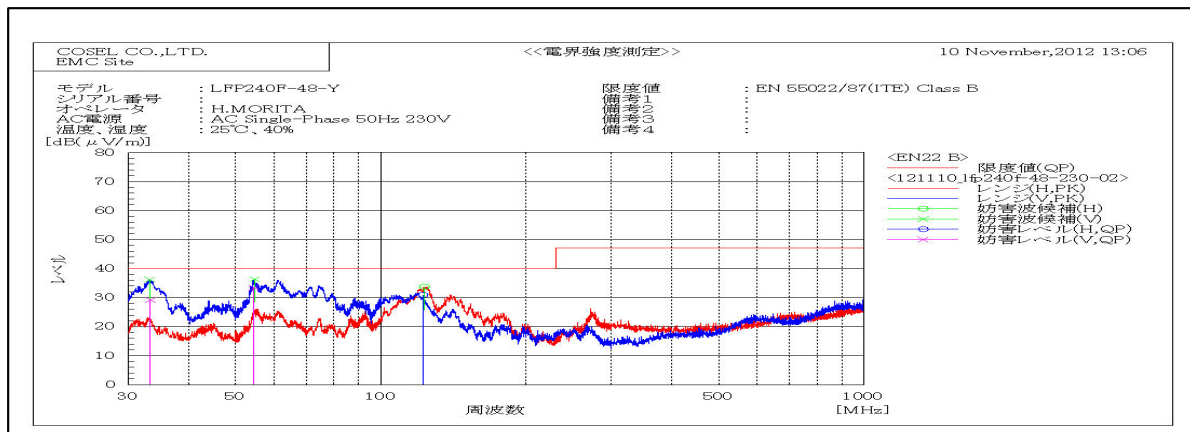

Frequency MHz	Polariz ation	Stabili ty	Readin g dB(μV)	Factor dB(1/m)	Level dB(μV/ m)	Limit dB(μV /m)	Margin dB	Pass/ Fail	Height cm	Angle deg	Remark
			QP		QP	QP	QP				
33.28	V	Stable	45.5	-16.3	29.2	40	10.8	Pass	99	61	
54.619	V	Stable	48.5	-15.1	33.4	40	6.6	Pass	99	243	
122.111	H	Stable	43.3	-12.4	30.9	40	9.1	Pass	147	29	

DATA SHEET		Date	11-Dec-12
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	H.MORITA

1. Line conduction

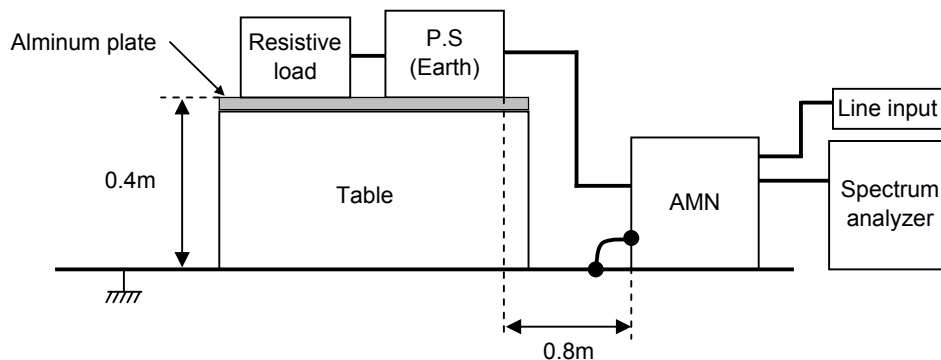

2. Radiated emission

