



DATA SHEET

		Date	15-Nov-11
Model	LFP300F-24-TY	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	D.Sumiya

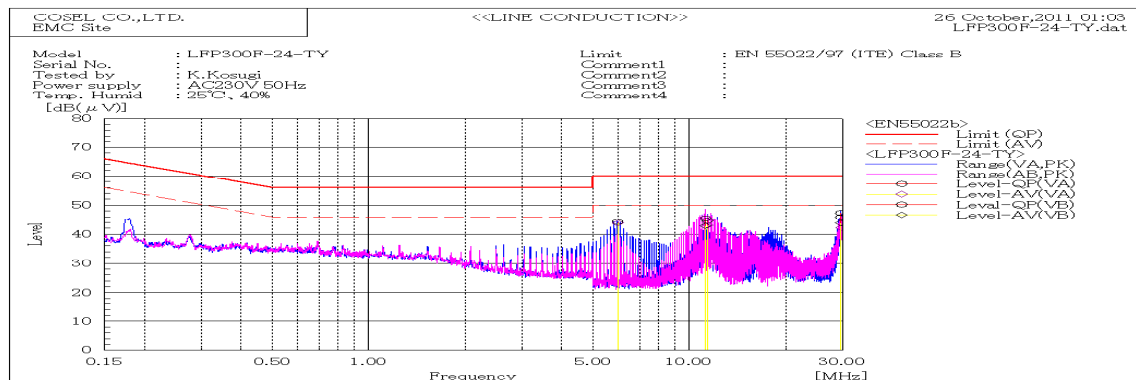


Frequency MHz	Line Phase	Reading dB(μV)		Factor dB	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/ Fail	Remark
		QP	AV		QP	AV	QP	AV	QP	AV		
5.97061	VA	33.9	33.5	10.3	44.2	43.8	60	50	15.8	6.2	Pass	
11.2444	VB	35	32.5	10.4	45.4	42.9	60	50	14.6	7.1	Pass	
11.3833	VA	34	32.4	10.6	44.6	43	60	50	15.4	7	Pass	
29.71185	VB	36.4	32.8	11	47.4	43.8	60	50	12.6	6.2	Pass	
29.71185	VA	34.8	31.2	11	45.8	42.2	60	50	14.2	7.8	Pass	

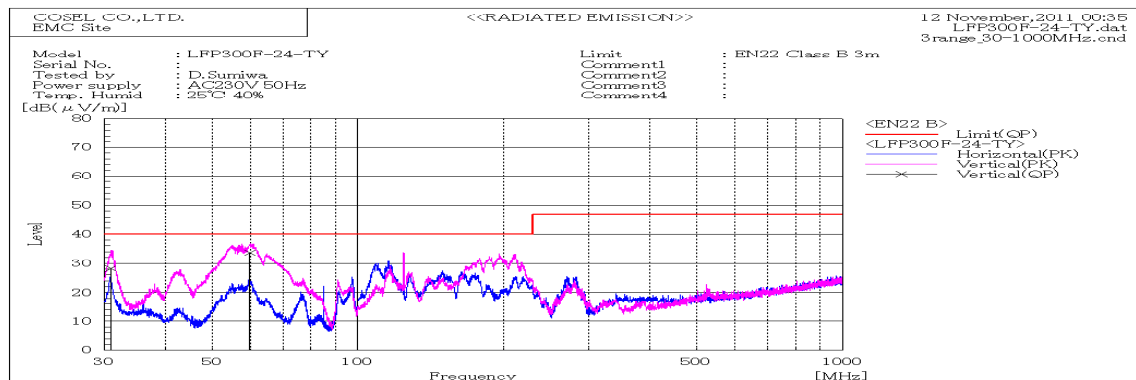

Frequency MHz	Polariz ation	Stability	Reading dB(μV)		Space Loss dB	Level dB(mW)		Margin dB	Pass/ Fail	Height cm	Angle deg	Remark
			QP	AV		QP	AV					
30.914	V	Stable	41.9	-13.7		28.2		40	11.8	Pass	128	0
59.837	V	Stable	57.9	-24.1		33.8		40	6.2	Pass	106	47

DATA SHEET		Date	15-Nov-11
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	D.Sumiya

1. Line conduction

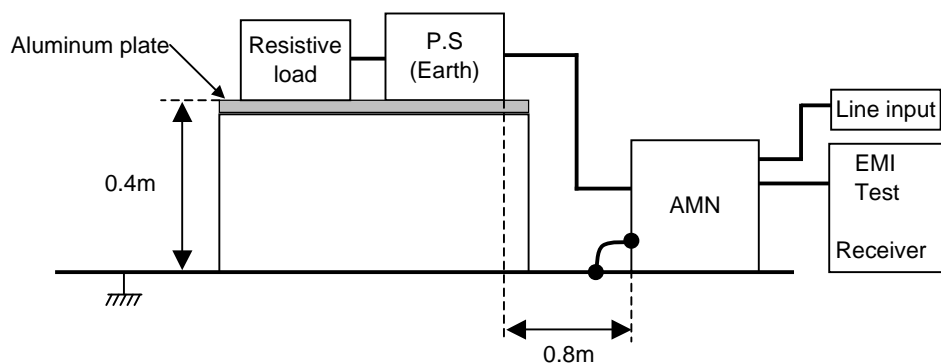

2. Radiated emission

