


DATA SHEET		Date	29-Feb-08
Model	LGA150A-5-Y	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	K.Ishimura

LINE CONDUCTION

Model Name : LGA150A-5-Y
 Model No. :
 Serial No. :
 Points : 5
 Detector : PEAK/QP/Ave.
 Line Mode : VA/VB
 Power Supply : AC 100V 60Hz
 Limit1: [EN 55022] Class B(QP)
 Limit2: [EN 55022] Class B(Ave.)

Temp. : 25 degreeC
 Humi. : 40%
 Date : 2008/2/29 15:12
 Test Equip. : R3132,ESPC
 Load Line : 100mm
 Comment :

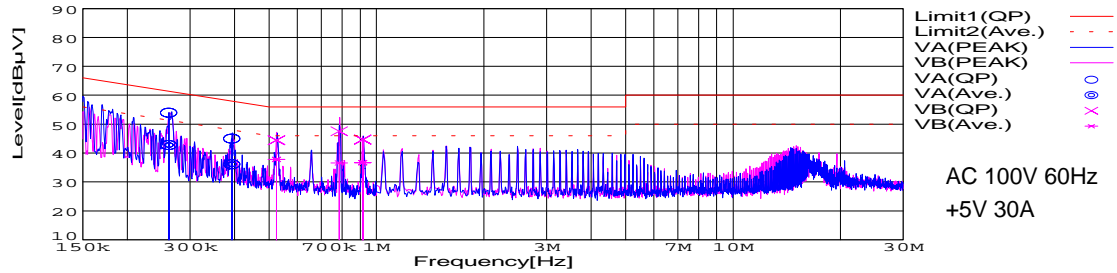


Frequency [MHz]	Meter Reading (Ave.) [dBμV]	Meter Reading (QP) [dBμV]	Factor [dB]	Level(Ave.) [dBμV]	Level(QP) [dBμV]	Line	Limit(Ave.) [dBμV]	Limit(QP) [dBμV]	Margin(Ave.) [dB]	Margin(QP) [dB]
0.2618	32.7	44	10	42.7	54	VA	51.4	61.4	8.7	7.4
0.3932	26.1	35	10	36.1	45	VA	48	58	11.9	13
0.5243	27.7	34.3	10.1	37.8	44.4	VB	46	56	8.2	11.6
0.7865	26.5	37.5	10.1	36.6	47.6	VB	46	56	9.4	8.4
0.915	26.6	34.5	10.1	36.7	44.6	VB	46	56	9.3	11.4

RADIATED EMISSION

Model Name : LGA150A-5-Y
 Model No. :
 Serial No. :
 Points : 2
 Detector : PEAK/QP
 Polarization : Vertical
 Power Supply : AC 100V 60Hz
 Limit: [EN 55022] Class B<3m>

Temp. : 25 degreeC
 Humi. : 40%
 Date : 2008/3/1 15:32
 Test Equip. : R3132,ESPC
 Load Line : 100mm
 Comment :

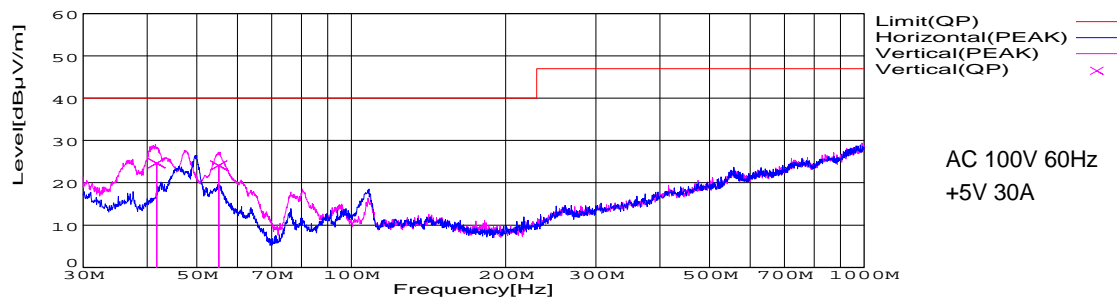

Frequency [MHz]	Meter Reading (QP) [dBμV]	Ant. Type	Antenna Factor [dB/m]	Cable & Preamp [dB]	Level(QP) [dBμV/m]	Angle [°]	Height [cm]	Polar.	Limit [dBμV/m]	Margin [dB]
41.762	44.8	BL	12	-32.2	24.6	35	100	Vert.	40	15.4
55.175	50.5	BL	5.7	-32.1	24.1	191	144	Vert.	40	15.9

DATA SHEET

Model	Circuit used for measurement
Test	EMI Line conduction & Radiated emission

1. Line conduction



2. Radiated emission

