


DATA SHEET		Date	29-Feb-08
Model	LGA75A-12	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	45 %RH
		Tested by	Y.Murata

LINE CONDUCTION

Model Name : LGA75A-12
 Model No. :
 Serial No. :
 Points : 4
 Detector : PEAK/QP/Ave.
 Line Mode : VA/VB
 Power Supply : AC 100V 60Hz
 Limit1: [EN 55022] Class B(QP)
 Limit2: [EN 55022] Class B(Ave.)

Temp. : 25 degreeC
 Humi. : 45 %
 Date : 2008/2/29
 Test Equip. : R3132,ESPC
 Load Line : 150 mm
 Comment :

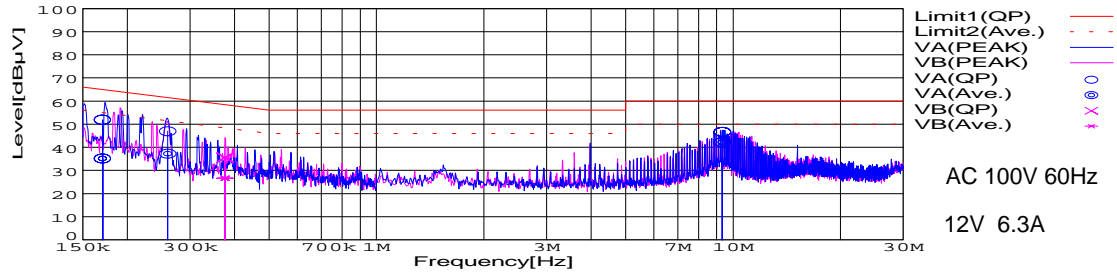


Frequency [MHz]	Meter Reading (Ave.) [dBuV]	Meter Reading (QP) [dBuV]	Factor [dB]	Level(Ave.) [dBuV]	Level(QP) [dBuV]	Line	Limit(Ave.) [dBuV]	Limit(QP) [dBuV]	Margin(Ave.) [dB]	Margin(QP) [dB]
0.1705	25.3	42	9.8	35.1	51.8	VA	54.9	64.9	19.8	13.1
0.2597	27.4	37.1	9.8	37.2	46.9	VA	51.5	61.5	14.3	14.6
9.3348	32	36.5	10.1	42.1	46.6	VA	50	60	7.9	13.4
0.3761	16.7	25.6	9.9	26.6	35.5	VB	48.4	58.4	21.8	22.9

RADIATED EMISSION

Model Name : LGA75A-12
 Model No. :
 Serial No. :
 Points : 2
 Detector : PEAK/QP
 Polarization : Vertical
 Power Supply : AC 100V 60Hz
 Limit: [EN 55022] Class B<3m>

Temp. : 25 degreeC
 Humi. : 45 %
 Date : 2008/2/15 12:03
 Test Equip. : R3132,ESPC
 Load Line : 150 mm
 Comment :

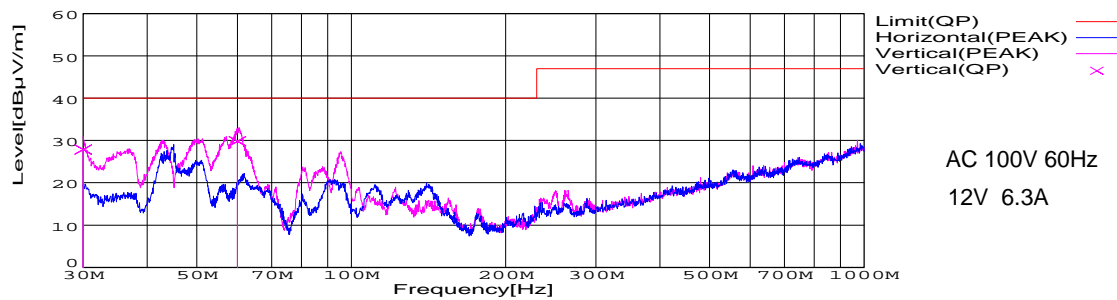


Frequency [MHz]	Meter Reading (QP) [dBuV]	Ant. Type	Antenna Factor [dB/m]	Cable & Preamp [dB]	Level(QP) [dBuV/m]	Angle [°]	Height [cm]	Polar.	Limit [dBuV/m]	Margin [dB]
60.012	57.1	BL	4.7	-32	29.8	20	117	Vert.	40	10.2
30.018	41.9	BL	18.2	-32.3	27.8	261	102	Vert.	40	12.2

DATA SHEET

Model	Circuit used for measurement
Test	EMI Line conduction & Radiated emission

1. Line conduction

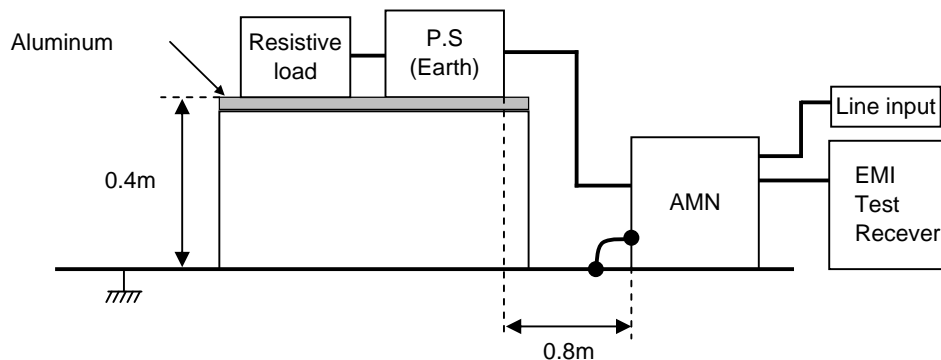

2. Radiated emission

