



DATA SHEET		Date	08-Feb-22
Model	LHA10F-24	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	K.Yamamoto

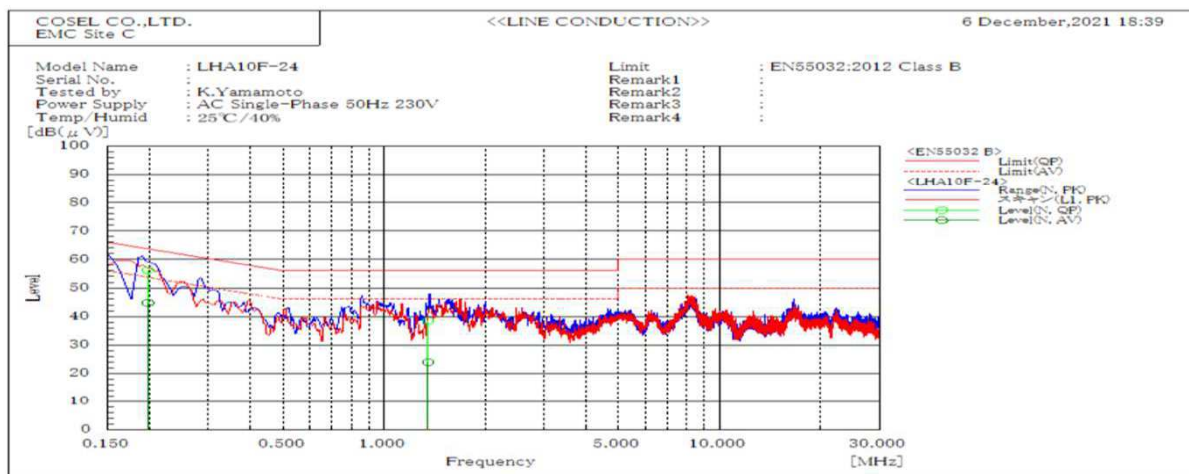

Frequency	Line	Level		Limit		Margin		Pass/Fail	Remark
MHz		dB(μV)		dB(μV)		dB			
		QP	AV	QP	AV	QP	AV		
0.198	N	56.2	44.8	63.7	53.7	7.5	8.9	Pass	
1.355	N	38.5	23.9	56	46	17.5	22.1	Pass	

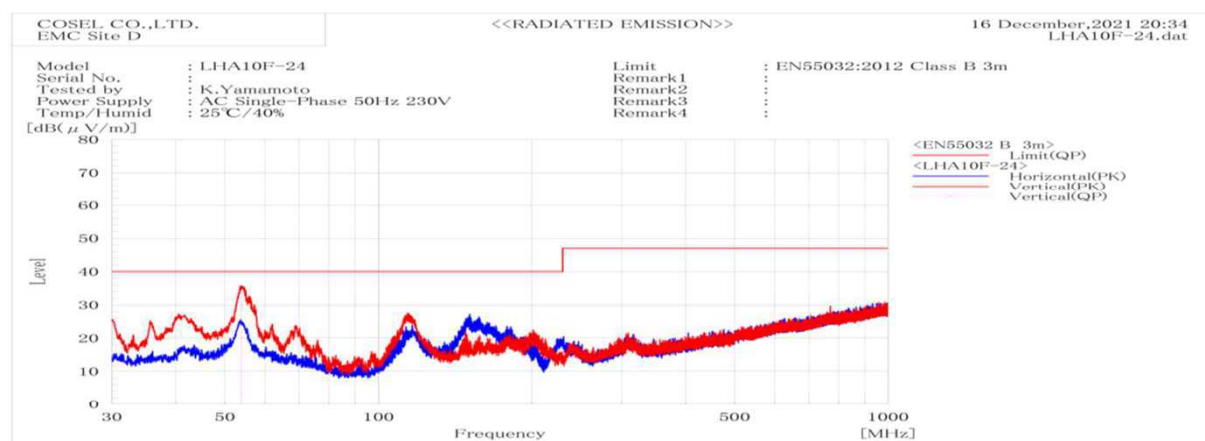


Frequency	Polarization	Stability	Level	Limit	Margin	Pass/Fail	Height	Angle	Remark
MHz			dB(μV/m)	dB(μV/m)	dB				
			QP	QP	QP				
53.804	V	Stable	34	40	6	Pass	100.2	10.8	


DATA SHEET

		Date	08-Feb-22
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	K.Yamamoto

1. Line conduction

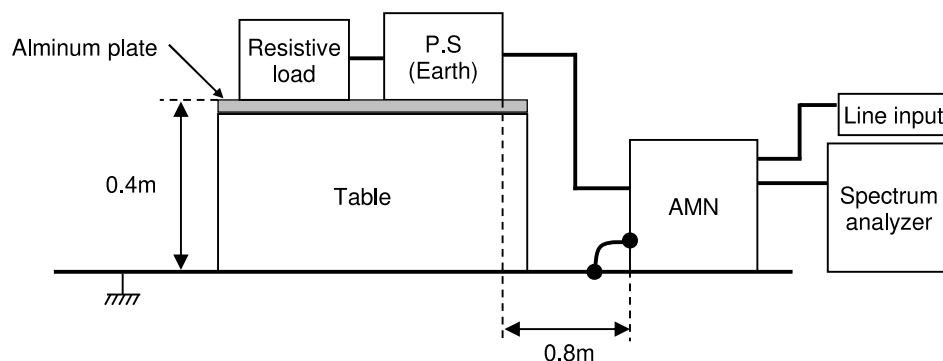

2. Radiated emission

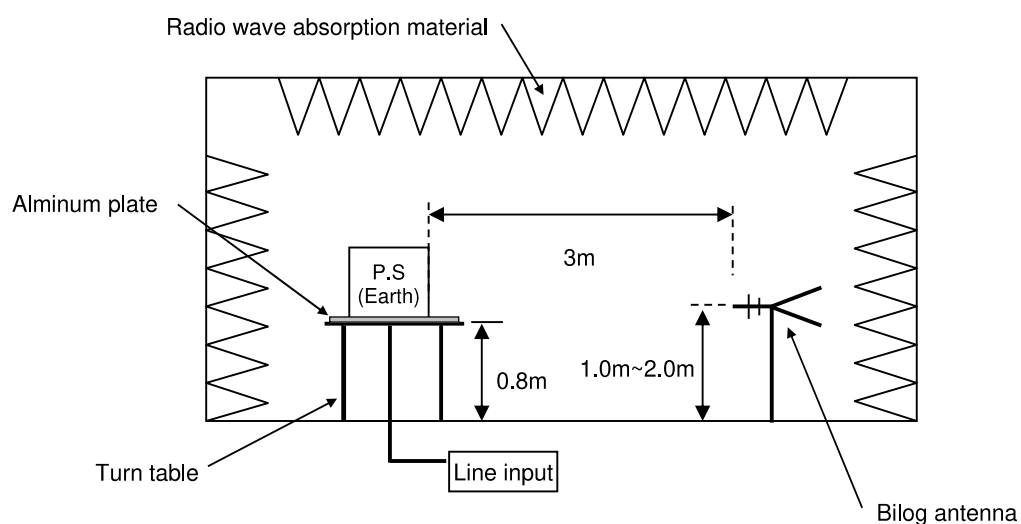


Conditions

Test : EMI
Model Name : LHA10F

Photographs of test set-up

1.LINE CONDUCTION

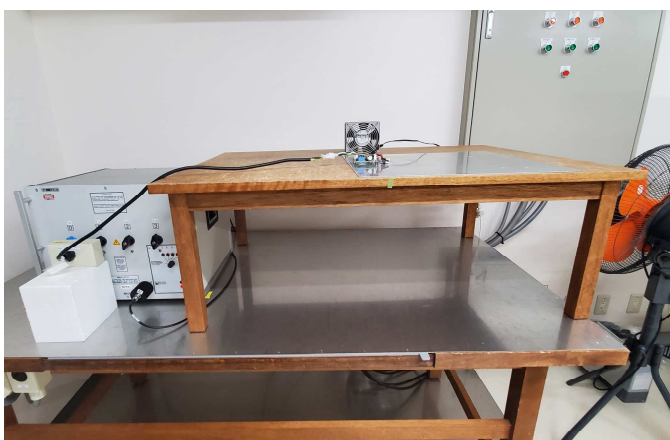

2.RADIATED EMISSION

