



EXTRA TEST DATA OF LHA150F-48

*Regulated DC Power Supply
Mar 20, 2021*

COSEL CO.,LTD.






CONTENTS

1.Inrush Current (enlargement) 1
2.Dynamic Line Regulation 2
3.Overtoltage Protection (waveform) 3
4.Hiccup cycle (by Overcurrent Protection) 4
5.Power Consumption (by Input Voltage) 5
6.Figure of Testing Circuitry 6

(Final Page 6)






Model		LHA150F-48	Temperature 25°C Testing Circuitry A
Item		Inrush Current (enlargement)	
Object		_____	

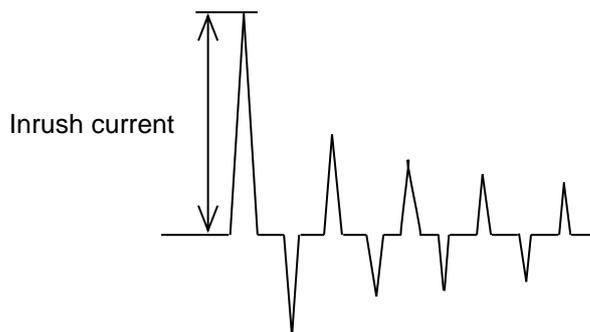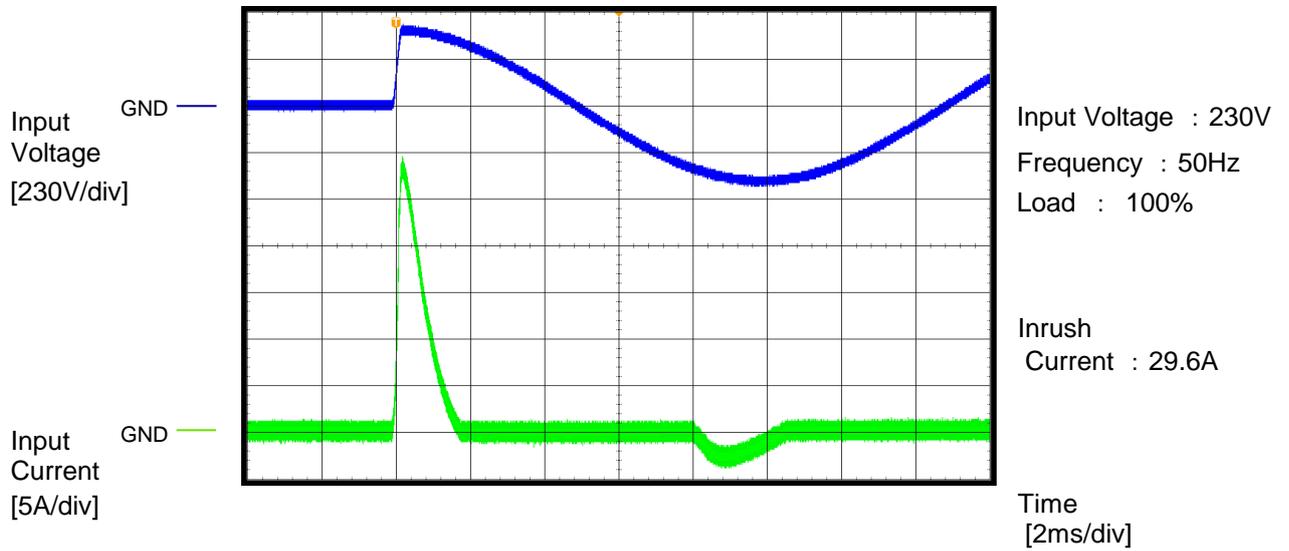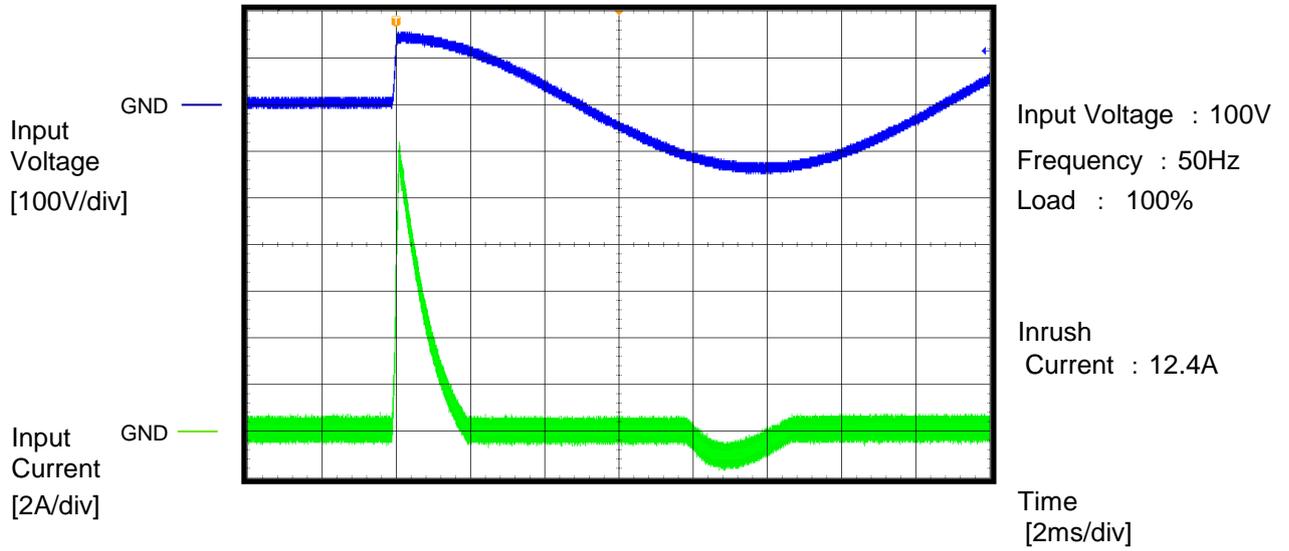



Model		LHA150F-48	Temperature 25°C Testing Circuitry A
Item		Dynamic Line Regulation	
Object		_____	

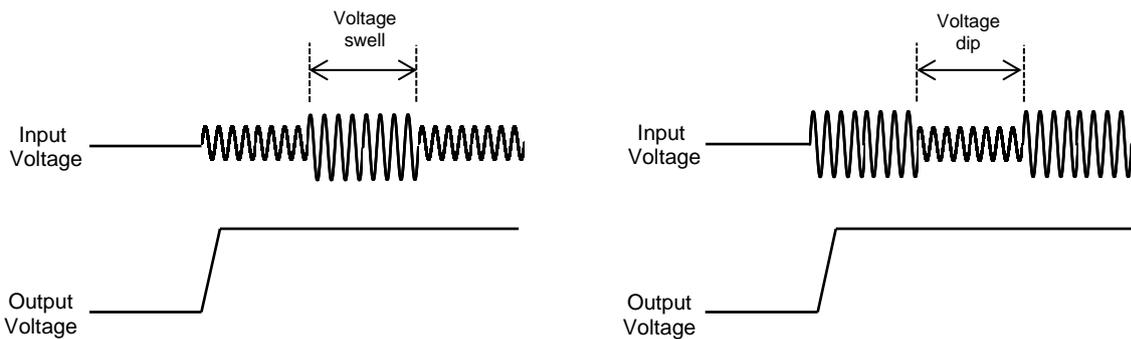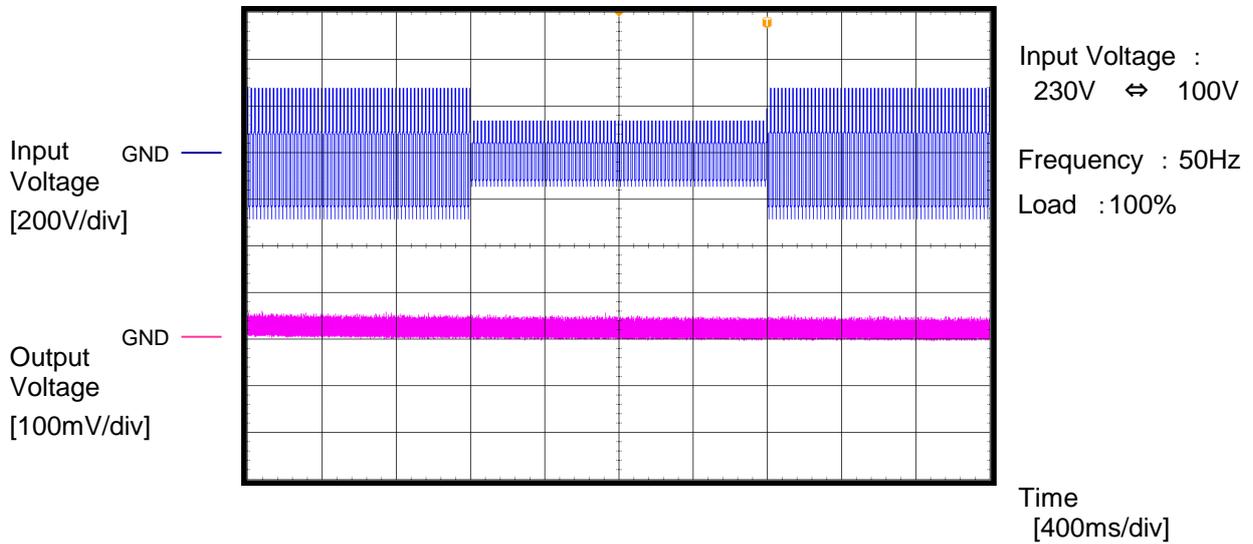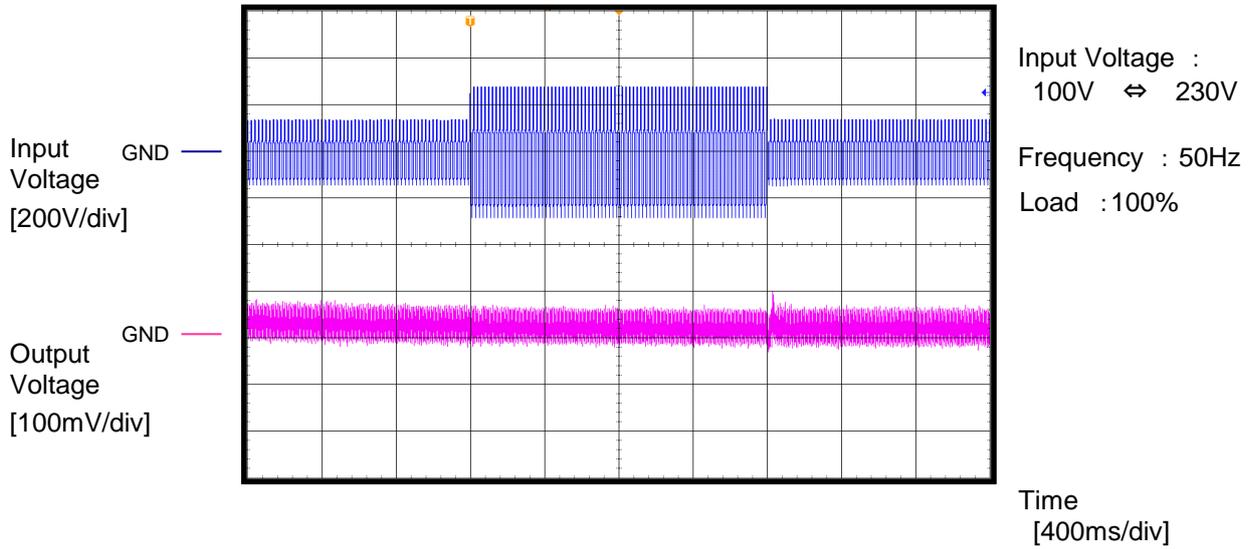




		Temperature 25°C Testing Circuitry A
Model	LHA150F-48	
Item	Over Voltage Protection	Input Voltage : 100V
Object	_____	

Output Voltage
[10V/div]

GND

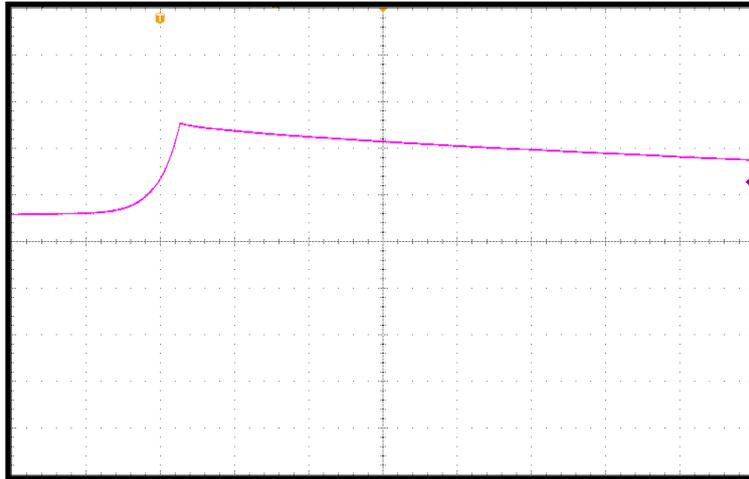


Load : 0%
Overvoltage protection
value : 65.5V

Time
[40ms/div]


Output Voltage
[10V/div]

GND

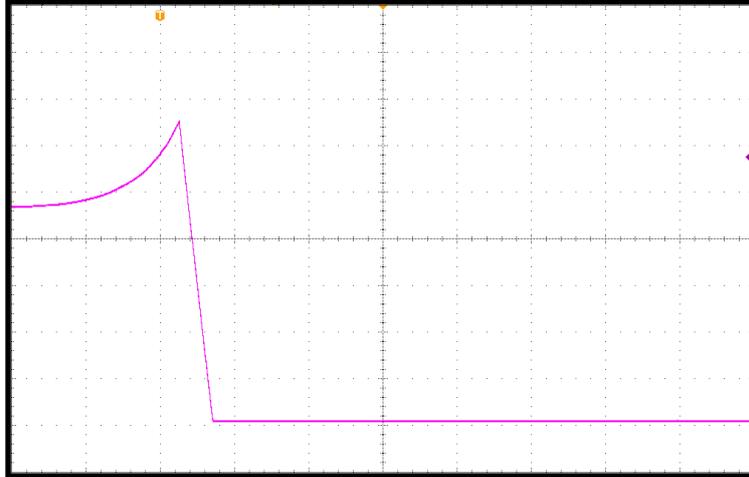

Load : 100%
Overvoltage protection
value : 65.3V


Time
[20ms/div]

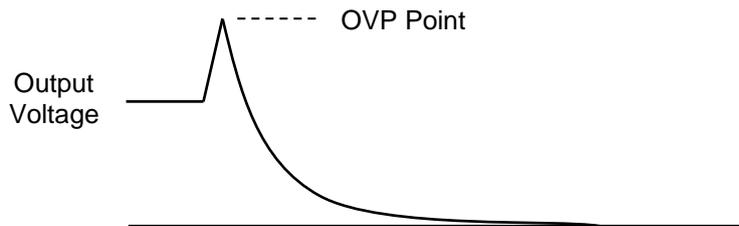



Model		LHA150F-48	Temperature 25°C Testing Circuitry A
Item		Short Circuit Current	
Object		_____	Load : Short

Output Current [2A/div]

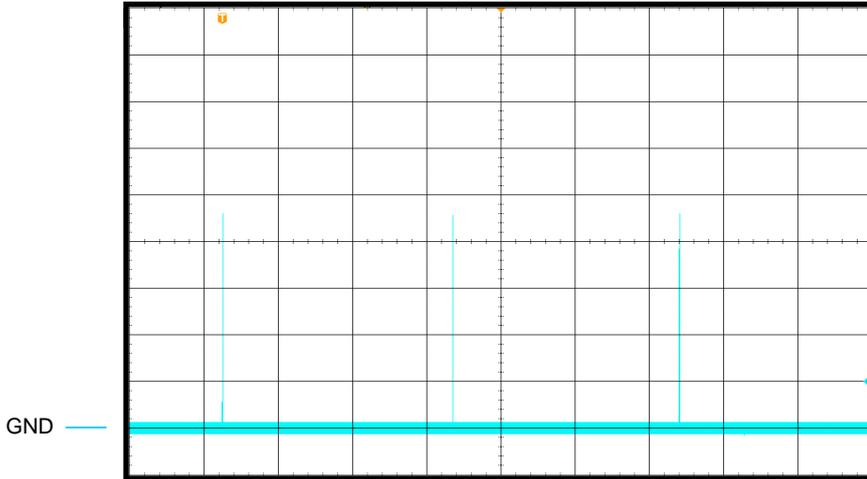

Input Voltage : 100V


Short-circuit current : 9.2A

ON Time : 1ms

Short circuit period : 1240ms

Time [400ms/div]

Output Current [2A/div]

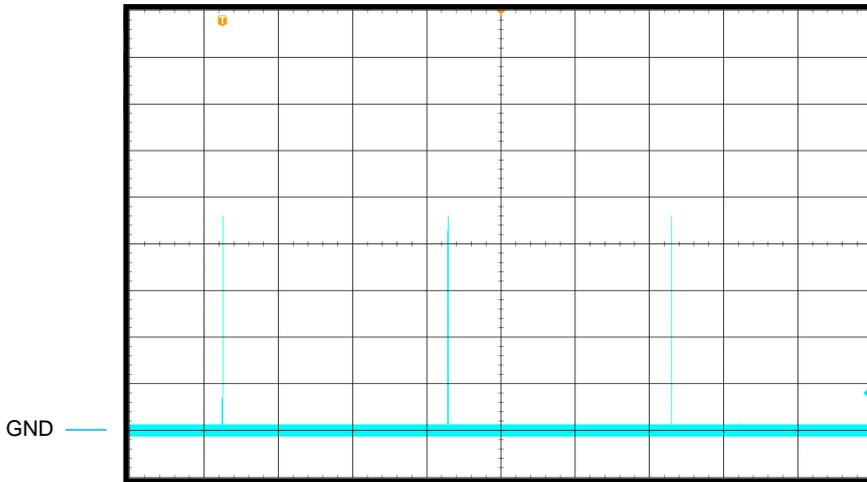


Input Voltage : 230V

Short-circuit current : 9.2A

ON Time : 1ms

Short circuit period : 1216ms

Time [400ms/div]

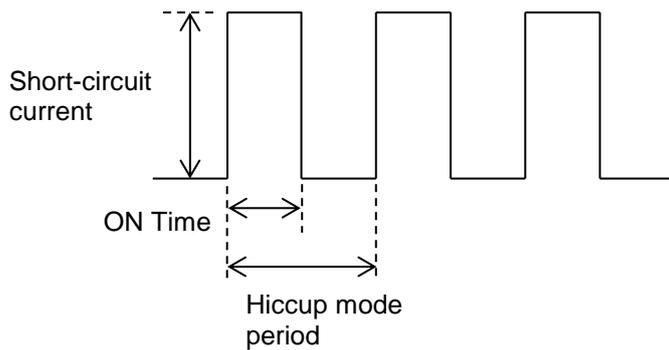



COSEL																
Model	LHA150F-48-R2															
Item	Input voltage - Power consumption	Temperature 25°C Testing Circuitry -														
Object	_____	Load :0%														
<p>1.Graph</p> <p>Power consumption [W]</p> <p>Input Voltage [V]</p>		<p>2.Values</p> <table border="1"> <thead> <tr> <th>Input voltage [V]</th> <th>Power consumption [W]</th> </tr> </thead> <tbody> <tr> <td>85</td> <td>0.09</td> </tr> <tr> <td>100</td> <td>0.11</td> </tr> <tr> <td>115</td> <td>0.20</td> </tr> <tr> <td>200</td> <td>0.53</td> </tr> <tr> <td>230</td> <td>0.69</td> </tr> <tr> <td>264</td> <td>0.92</td> </tr> </tbody> </table>	Input voltage [V]	Power consumption [W]	85	0.09	100	0.11	115	0.20	200	0.53	230	0.69	264	0.92
Input voltage [V]	Power consumption [W]															
85	0.09															
100	0.11															
115	0.20															
200	0.53															
230	0.69															
264	0.92															
<p>Reducing standby power is possible by OFF signal of the remote control.</p>																

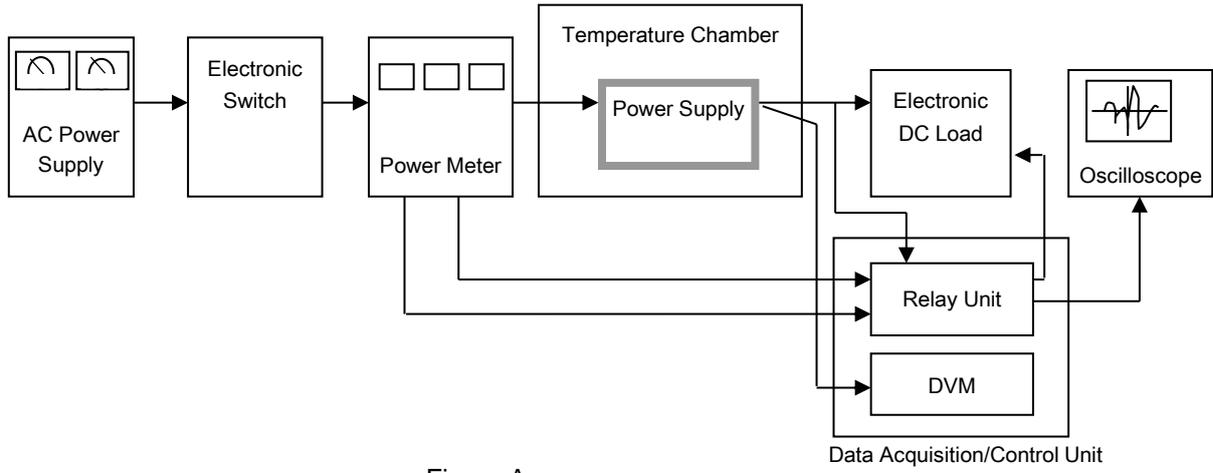


Figure A