



# DATA SHEET

DATA SHEET		Date	08-Feb-22
Model	LHA15F-5	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	K.Yamamoto

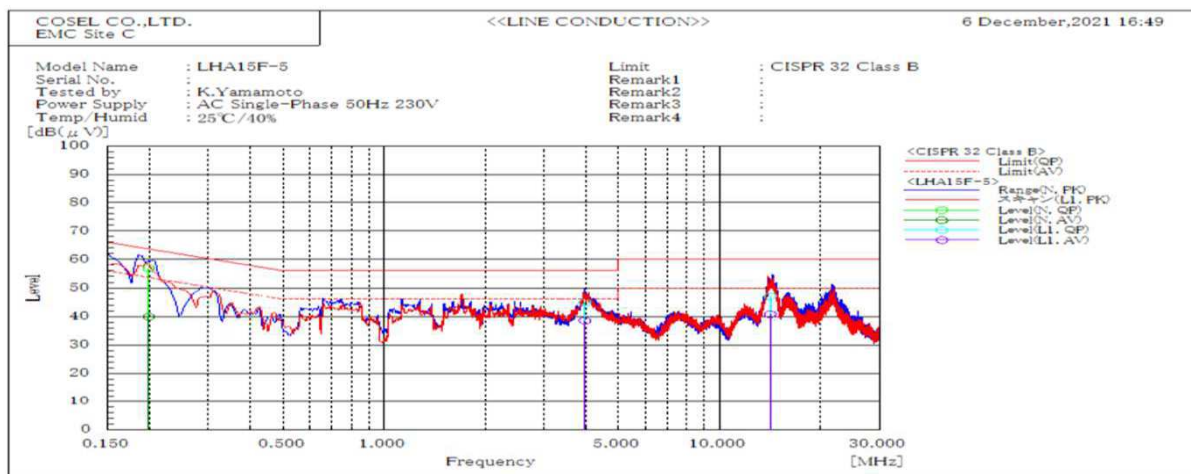

Frequency MHz	Line	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/Fail	Remark
		QP	AV	QP	AV	QP	AV		
0.199	N	56.9	39.9	63.6	53.6	6.7	13.7	Pass	
3.968	L1	45	38.6	56	46	11	7.4	Pass	
14.156	L1	47.1	40.8	60	50	12.9	9.2	Pass	

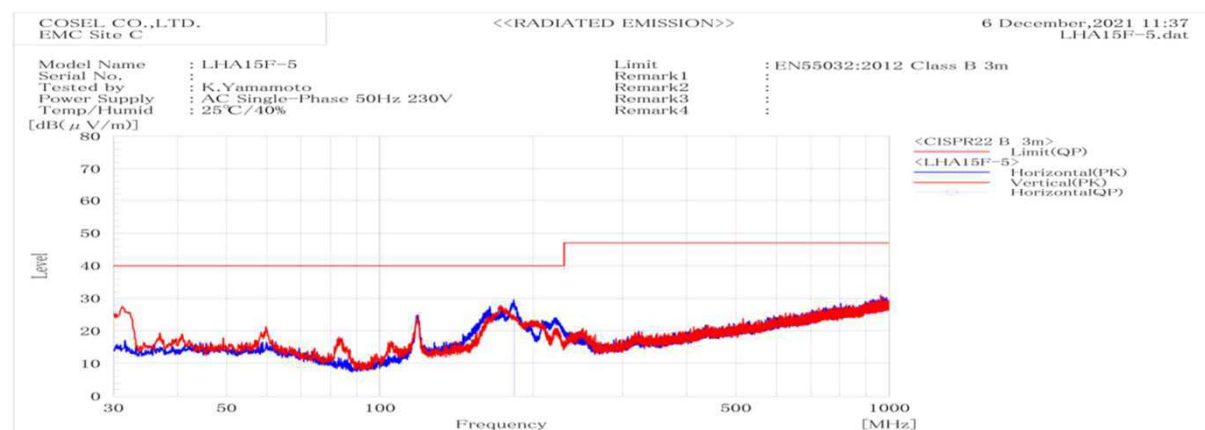


Frequency MHz	Polarization	Stability	Level dB(μV/m)		Limit dB(μV/m)	Margin dB	Pass/Fail	Height cm	Angle deg	Remark
			QP	QP						
183.724	H	Stable	28.2	40	11.8	Pass	199.7	177.4		


# DATA SHEET

		Date	08-Feb-22
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	K.Yamamoto

## 1. Line conduction

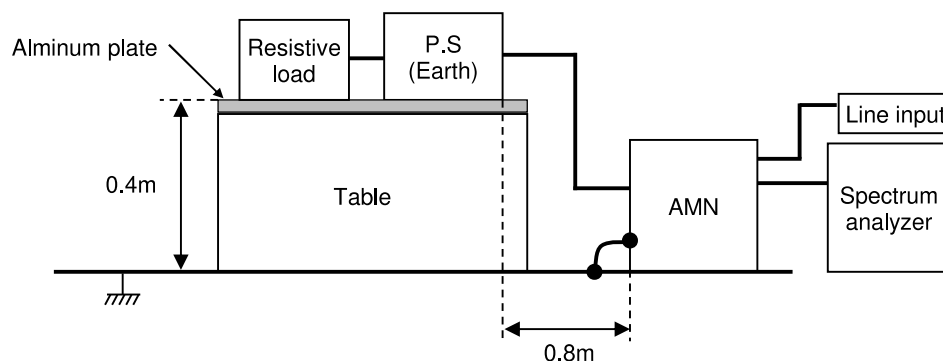

## 2. Radiated emission

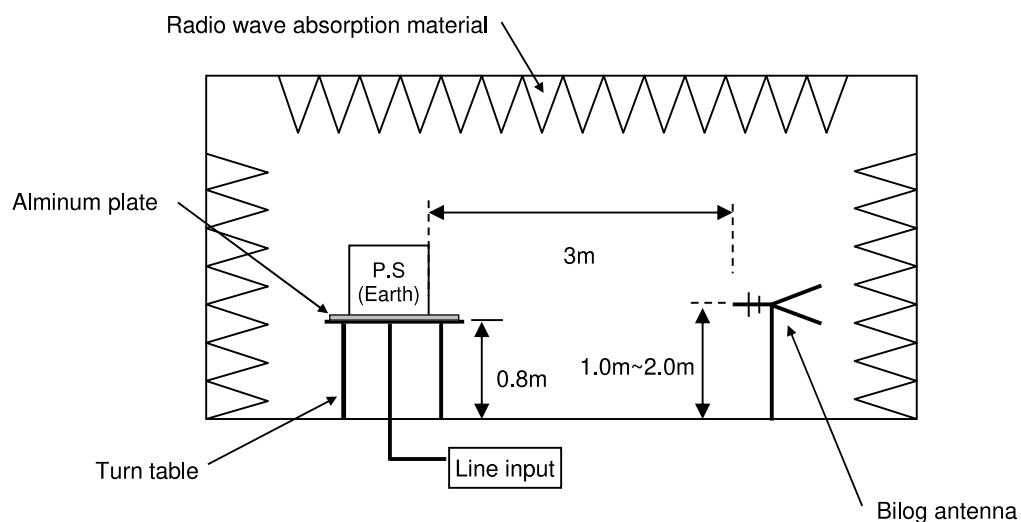




## Conditions

Test : EMI  
Model Name : LHA15F

## Photographs of test set-up

### 1.LINE CONDUCTION

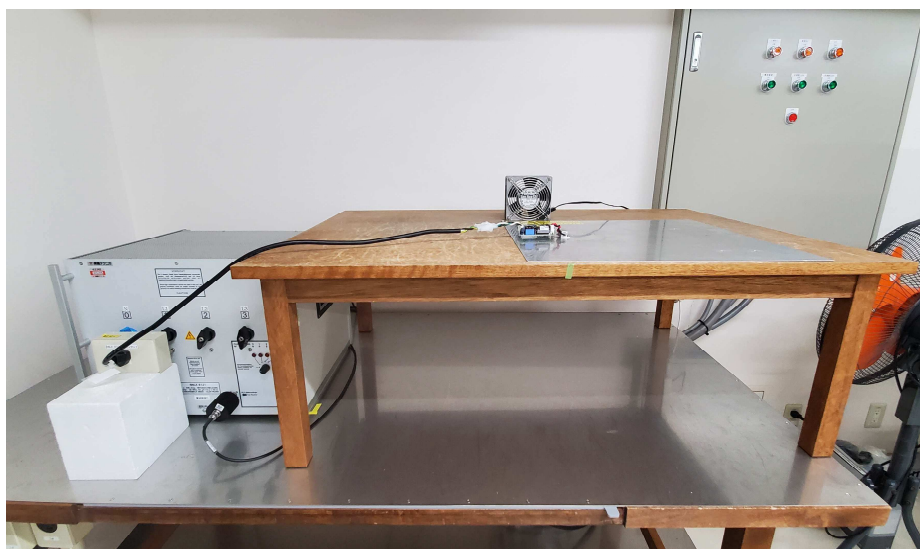

### 2.RADIATED EMISSION

