



DATA SHEET		Date	12-Sep-19
Model	LHA300F-24-Y	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	K.Miyazaki

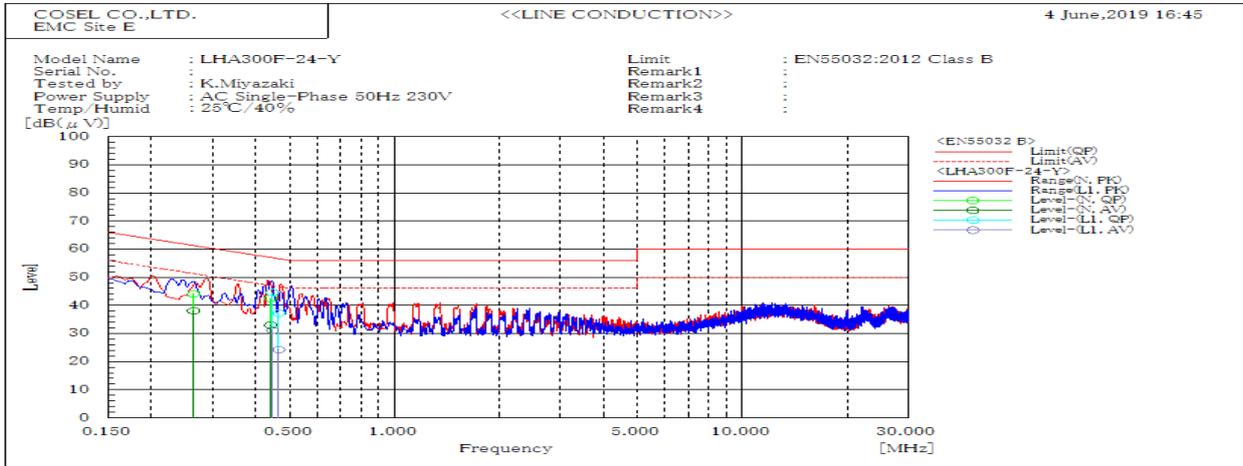


Frequency MHz	Line	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/Fail	Remark
		QP	AV	QP	AV	QP	AV		
0.446	L1	44.6	31.2	57	47	12.4	15.8	Pass	
0.465	L1	37.2	24.2	56.6	46.6	19.4	22.4	Pass	
0.441	N	42.5	33	57.1	47.1	14.6	14.1	Pass	
0.264	N	44.1	38	61.3	51.3	17.2	13.3	Pass	

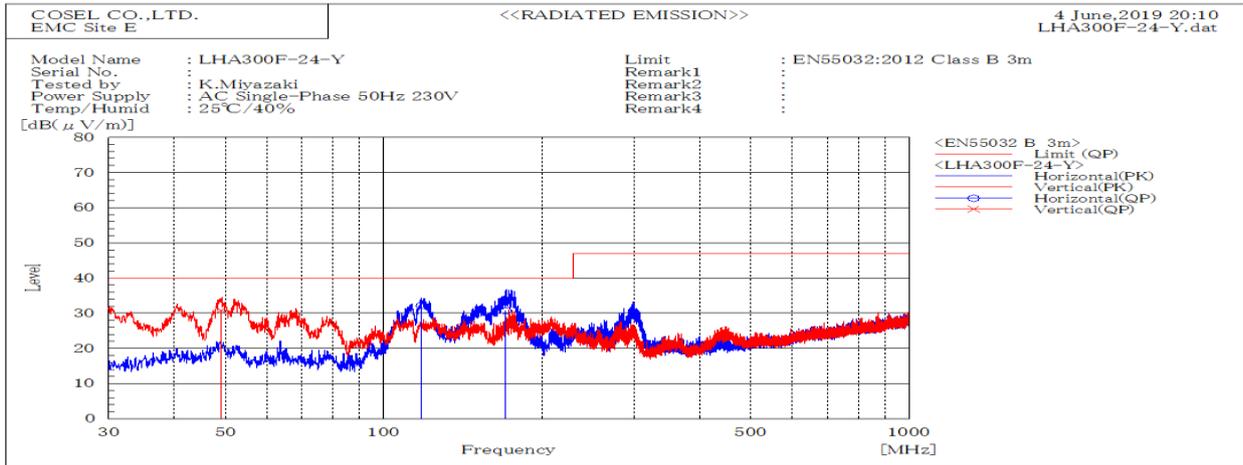


Frequency MHz	Polarization	Stability	Level dB(μV/m)	Limit dB(μV/m)	Margin dB	Pass/Fail	Height cm	Angle deg	Remark
			QP	QP	QP				
49.014	V	Stable	30.8	40	9.2	Pass	100.2	320.4	
170.803	H	Stable	30.7	40	9.3	Pass	196.7	345.5	
118.251	H	Stable	32.2	40	7.8	Pass	198.4	203.9	

DATA SHEET		Date	12-Sep-19
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	K.Miyazaki

1. Line conduction

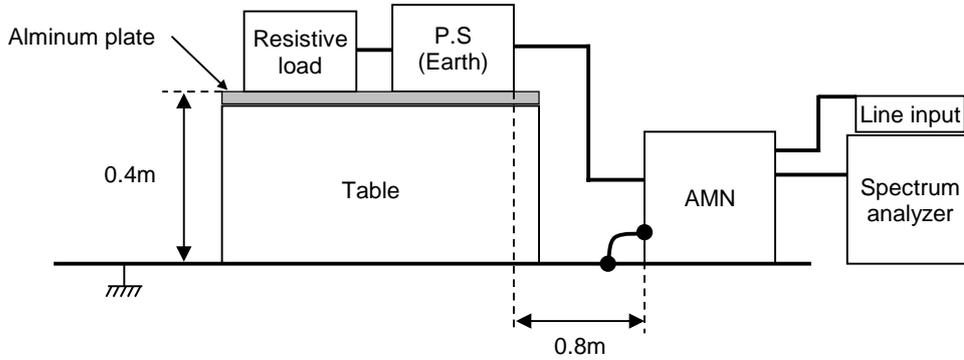

2. Radiated emission

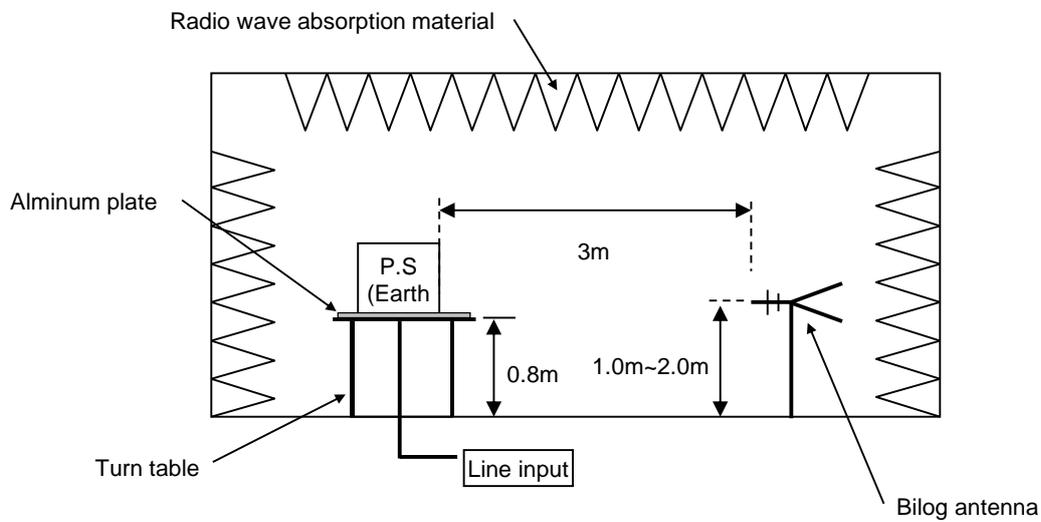

Conditions

Test : EMI
 Model Name : LHA300F-24-Y

Photographs of test set-up

1.LINE CONDUCTION



2.RADIATED EMISSION

