

Temperature increase of main components

Model: MGFS1524□□

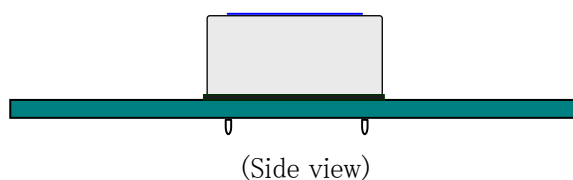
## 1. Conditions

- (1) Input :DC 24 [V]  
 (2) Output :Rated output  
 (3) Cooling method :Convection cooling  
 (4) Mounting method :Shown as Fig.1.1

## 2. Result

Table 2.1 Temperature increase of main components

Table 2.1 Temperature increase of main components								
No.	Parts name	Symbol No.	Increase ( $\Delta T$ )				Rated temp. [°C]	Reference
			[deg]					
			3.3V	5V	12V	15V		
1	Transformer	T101	60	63	54	46	155	
2	Switching MOS-FET	TR101	53	57	55	45	150	Junction Temp.
3	Rectified MOS-FET(Output)	TR202	56	56	52	42	150	Junction Temp.
4	Output Choke Coil	L201	51	51	47	38	125	
5	Bipolar Transistor	TR113	53	55	51	43	150	Junction Temp.
6	Case	—	46	47	44	36	—	
7								
8								
9								
10								
11								
12								
13								
14								
15								
16								
17								
18								
19								
20								

Fig.1.1 Mounting method  
(Normal position)