



TEST DATA OF MGS104812

Regulated DC Power Supply
August 9, 2016

Approved by : Takayuki Fukuda
Takayuki Fukuda Design Manager

Prepared by : Ryosuke Nakao
Ryosuke Nakao Design Engineer

COSEL CO.,LTD.

CONTENTS


| | |
|---|----|
| 1.Input Current (by Input Voltage) | 1 |
| 2.Input Current (by Load Current) | 2 |
| 3.Input Power (by Load Current) | 3 |
| 4.Efficiency (by Input Voltage) | 4 |
| 5.Efficiency (by Load Current) | 5 |
| 6.Line Regulation | 6 |
| 7.Load Regulation | 7 |
| 8.Dynamic Load Response | 8 |
| 9.Ripple Voltage (by Load Current) | 9 |
| 10.Ripple-Noise | 10 |
| 11.Ripple Voltage (by Ambient Temperature) | 11 |
| 12.Ambient Temperature Drift | 12 |
| 13.Output Voltage Accuracy | 13 |
| 14.Time Lapse Drift | 14 |
| 15.Rise and Fall Time | 15 |
| 16.Minimum Input Voltage for Regulated Output Voltage | 16 |
| 17.Overcurrent Protection | 17 |
| 18.Switching Frequency (by Load Current) | 18 |
| 19.Figure of Testing Circuitry | 19 |

(Final Page 19)



| | |
|--------|----------------------------------|
| Model | MGS104812 |
| Item | Input Current (by Input Voltage) |
| Object | _____ |

Temperature 25°C
Testing Circuitry Figure A

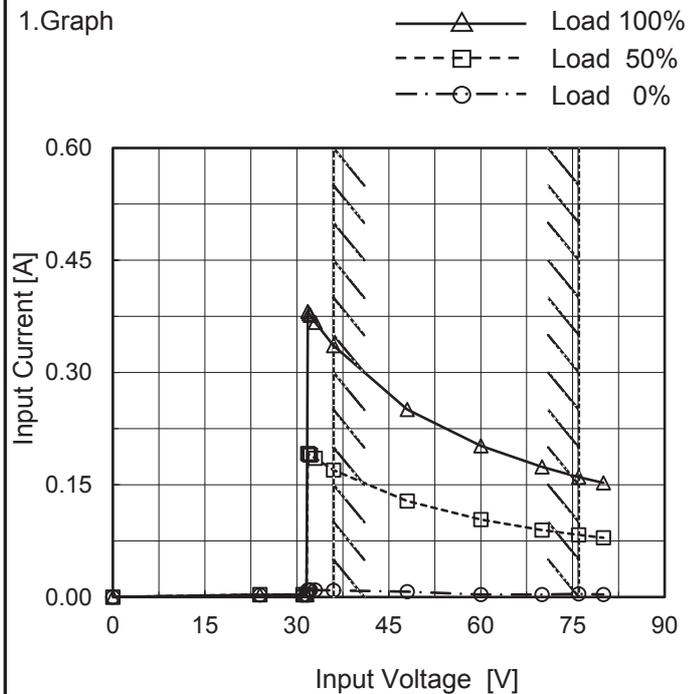

2.Values

| Input Voltage [V] | Input Current [A] | | |
|-------------------|-------------------|----------|-----------|
| | Load 0% | Load 50% | Load 100% |
| 0.0 | 0.000 | 0.000 | 0.000 |
| 24.0 | 0.003 | 0.003 | 0.003 |
| 31.0 | 0.003 | 0.003 | 0.003 |
| 31.6 | 0.003 | 0.003 | 0.003 |
| 31.8 | 0.009 | 0.192 | 0.381 |
| 32.0 | 0.009 | 0.190 | 0.379 |
| 32.2 | 0.009 | 0.190 | 0.377 |
| 33.0 | 0.009 | 0.185 | 0.367 |
| 36.0 | 0.009 | 0.170 | 0.336 |
| 48.0 | 0.007 | 0.128 | 0.251 |
| 60.0 | 0.003 | 0.104 | 0.202 |
| 70.0 | 0.003 | 0.090 | 0.174 |
| 76.0 | 0.004 | 0.083 | 0.160 |
| 80.0 | 0.003 | 0.079 | 0.153 |
| -- | - | - | - |
| -- | - | - | - |
| -- | - | - | - |
| -- | - | - | - |



| Model | | MGS104812 | | Temperature 25°C | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---|-------------------|--|-------------------|--|--|------------------|-------------------|--|--|-------------------|-------------------|-------------------|------|-------|-------|-------|------|-------|-------|-------|------|-------|-------|-------|------|-------|-------|-------|------|-------|-------|-------|------|-------|-------|-------|------|-------|-------|-------|----|---|---|---|----|---|---|---|----|---|---|---|----|---|---|---|
| Item | | Input Current (by Load Current) | | Testing Circuitry Figure A | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Object | | _____ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1.Graph | | <p>—△— Input Volt. 36V</p> <p>- - □ - - Input Volt. 48V</p> <p>- · ○ - · - Input Volt. 76V</p> | | 2.Values | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | <table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Input Current [A]</th> </tr> <tr> <th>Input Volt. 36[V]</th> <th>Input Volt. 48[V]</th> <th>Input Volt. 76[V]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>0.009</td><td>0.007</td><td>0.004</td></tr> <tr><td>0.18</td><td>0.073</td><td>0.055</td><td>0.037</td></tr> <tr><td>0.36</td><td>0.137</td><td>0.104</td><td>0.068</td></tr> <tr><td>0.54</td><td>0.203</td><td>0.152</td><td>0.098</td></tr> <tr><td>0.72</td><td>0.269</td><td>0.202</td><td>0.129</td></tr> <tr><td>0.90</td><td>0.336</td><td>0.251</td><td>0.160</td></tr> <tr><td>0.99</td><td>0.371</td><td>0.277</td><td>0.176</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table> | | Load Current [A] | Input Current [A] | | | Input Volt. 36[V] | Input Volt. 48[V] | Input Volt. 76[V] | 0.00 | 0.009 | 0.007 | 0.004 | 0.18 | 0.073 | 0.055 | 0.037 | 0.36 | 0.137 | 0.104 | 0.068 | 0.54 | 0.203 | 0.152 | 0.098 | 0.72 | 0.269 | 0.202 | 0.129 | 0.90 | 0.336 | 0.251 | 0.160 | 0.99 | 0.371 | 0.277 | 0.176 | -- | - | - | - | -- | - | - | - | -- | - | - | - | -- | - | - | - |
| Load Current [A] | Input Current [A] | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Input Volt. 36[V] | Input Volt. 48[V] | Input Volt. 76[V] | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.00 | 0.009 | 0.007 | 0.004 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.18 | 0.073 | 0.055 | 0.037 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.36 | 0.137 | 0.104 | 0.068 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.54 | 0.203 | 0.152 | 0.098 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.72 | 0.269 | 0.202 | 0.129 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.90 | 0.336 | 0.251 | 0.160 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.99 | 0.371 | 0.277 | 0.176 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -- | - | - | - | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -- | - | - | - | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -- | - | - | - | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -- | - | - | - | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Note: Slanted line shows the range of the rated load current. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| <p>Model MGS104812</p> | | <p>Temperature 25°C Testing Circuitry Figure A</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--|-------------------------------|---|-------------------|-----------------|--|--|-------------------|-------------------|-------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|-------|-------|-------|------|-------|-------|-------|----|---|---|---|----|---|---|---|----|---|---|---|----|---|---|---|
| Item | Input Power (by Load Current) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Object | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <p>1.Graph</p> <p> —△— Input Volt. 36V - - - □ - - - Input Volt. 48V - · - ○ - · - - Input Volt. 76V </p> <p>Input Power [W]</p> <p>Load Current [A]</p> | | <p>2.Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Input Power [W]</th> </tr> <tr> <th>Input Volt. 36[V]</th> <th>Input Volt. 48[V]</th> <th>Input Volt. 76[V]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>0.31</td><td>0.34</td><td>0.25</td></tr> <tr><td>0.18</td><td>2.62</td><td>2.66</td><td>2.82</td></tr> <tr><td>0.36</td><td>4.94</td><td>4.99</td><td>5.14</td></tr> <tr><td>0.54</td><td>7.29</td><td>7.31</td><td>7.47</td></tr> <tr><td>0.72</td><td>9.67</td><td>9.68</td><td>9.81</td></tr> <tr><td>0.90</td><td>12.08</td><td>12.05</td><td>12.17</td></tr> <tr><td>0.99</td><td>13.30</td><td>13.26</td><td>13.36</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table> | Load Current [A] | Input Power [W] | | | Input Volt. 36[V] | Input Volt. 48[V] | Input Volt. 76[V] | 0.00 | 0.31 | 0.34 | 0.25 | 0.18 | 2.62 | 2.66 | 2.82 | 0.36 | 4.94 | 4.99 | 5.14 | 0.54 | 7.29 | 7.31 | 7.47 | 0.72 | 9.67 | 9.68 | 9.81 | 0.90 | 12.08 | 12.05 | 12.17 | 0.99 | 13.30 | 13.26 | 13.36 | -- | - | - | - | -- | - | - | - | -- | - | - | - | -- | - | - | - |
| Load Current [A] | Input Power [W] | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Input Volt. 36[V] | Input Volt. 48[V] | Input Volt. 76[V] | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.00 | 0.31 | 0.34 | 0.25 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.18 | 2.62 | 2.66 | 2.82 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.36 | 4.94 | 4.99 | 5.14 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.54 | 7.29 | 7.31 | 7.47 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.72 | 9.67 | 9.68 | 9.81 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.90 | 12.08 | 12.05 | 12.17 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.99 | 13.30 | 13.26 | 13.36 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -- | - | - | - | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -- | - | - | - | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -- | - | - | - | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -- | - | - | - | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <p>Note: Slanted line shows the range of the rated load current.</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| COSEL | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--|-------------------------------|--|-------------------|----------------|--|----------|-----------|----|------|------|----|------|------|----|------|------|----|------|------|----|------|------|----|------|------|----|------|------|----|------|------|----|------|------|
| Model | MGS104812 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Item | Efficiency (by Input Voltage) | Temperature 25°C Testing Circuitry Figure A | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Object | _____ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <p>1.Graph</p> <p style="text-align: right;"> ---□--- Load 50% —△— Load 100% </p> <p>Note: Slanted line shows the range of the rated input voltage.</p> | | <p>2.Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Input Voltage [V]</th> <th colspan="2">Efficiency [%]</th> </tr> <tr> <th>Load 50%</th> <th>Load 100%</th> </tr> </thead> <tbody> <tr><td>33</td><td>88.7</td><td>89.6</td></tr> <tr><td>36</td><td>88.8</td><td>89.8</td></tr> <tr><td>40</td><td>88.4</td><td>89.7</td></tr> <tr><td>48</td><td>88.1</td><td>89.8</td></tr> <tr><td>55</td><td>87.5</td><td>89.8</td></tr> <tr><td>60</td><td>87.3</td><td>89.3</td></tr> <tr><td>70</td><td>86.0</td><td>89.1</td></tr> <tr><td>76</td><td>85.6</td><td>88.8</td></tr> <tr><td>80</td><td>84.8</td><td>88.4</td></tr> </tbody> </table> | Input Voltage [V] | Efficiency [%] | | Load 50% | Load 100% | 33 | 88.7 | 89.6 | 36 | 88.8 | 89.8 | 40 | 88.4 | 89.7 | 48 | 88.1 | 89.8 | 55 | 87.5 | 89.8 | 60 | 87.3 | 89.3 | 70 | 86.0 | 89.1 | 76 | 85.6 | 88.8 | 80 | 84.8 | 88.4 |
| Input Voltage [V] | Efficiency [%] | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Load 50% | Load 100% | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 33 | 88.7 | 89.6 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 36 | 88.8 | 89.8 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 40 | 88.4 | 89.7 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 48 | 88.1 | 89.8 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 55 | 87.5 | 89.8 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 60 | 87.3 | 89.3 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 70 | 86.0 | 89.1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 76 | 85.6 | 88.8 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 80 | 84.8 | 88.4 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Model | | MGS104812 | | Temperature | 25°C | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---|-------------------|---|-------------------|---|----------|------------------|----------------|--|--|-------------------|-------------------|-------------------|------|---|---|---|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|----|---|---|---|----|---|---|---|----|---|---|---|----|---|---|---|
| Item | | Efficiency (by Load Current) | | Testing Circuitry | Figure A | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Object | | _____ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1.Graph | | —△— Input Volt. 36V - - □ - - Input Volt. 48V - · ○ - · Input Volt. 76V | | 2.Values | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | <table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Efficiency [%]</th> </tr> <tr> <th>Input Volt. 36[V]</th> <th>Input Volt. 48[V]</th> <th>Input Volt. 76[V]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>0.18</td><td>82.2</td><td>81.2</td><td>76.6</td></tr> <tr><td>0.36</td><td>87.7</td><td>86.9</td><td>83.8</td></tr> <tr><td>0.54</td><td>89.1</td><td>88.8</td><td>86.6</td></tr> <tr><td>0.72</td><td>89.7</td><td>89.6</td><td>88.1</td></tr> <tr><td>0.90</td><td>89.8</td><td>89.8</td><td>88.8</td></tr> <tr><td>0.99</td><td>89.6</td><td>89.9</td><td>89.0</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table> | | Load Current [A] | Efficiency [%] | | | Input Volt. 36[V] | Input Volt. 48[V] | Input Volt. 76[V] | 0.00 | - | - | - | 0.18 | 82.2 | 81.2 | 76.6 | 0.36 | 87.7 | 86.9 | 83.8 | 0.54 | 89.1 | 88.8 | 86.6 | 0.72 | 89.7 | 89.6 | 88.1 | 0.90 | 89.8 | 89.8 | 88.8 | 0.99 | 89.6 | 89.9 | 89.0 | -- | - | - | - | -- | - | - | - | -- | - | - | - | -- | - | - | - |
| Load Current [A] | Efficiency [%] | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Input Volt. 36[V] | Input Volt. 48[V] | Input Volt. 76[V] | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.00 | - | - | - | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.18 | 82.2 | 81.2 | 76.6 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.36 | 87.7 | 86.9 | 83.8 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.54 | 89.1 | 88.8 | 86.6 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.72 | 89.7 | 89.6 | 88.1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.90 | 89.8 | 89.8 | 88.8 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.99 | 89.6 | 89.9 | 89.0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -- | - | - | - | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -- | - | - | - | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -- | - | - | - | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -- | - | - | - | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Note: Slanted line shows the range of the rated load current. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| COSEL | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--|--------------------|--|-------------------|--------------------|--|----------|-----------|----|--------|--------|----|--------|--------|----|--------|--------|----|--------|--------|----|--------|--------|----|--------|--------|----|--------|--------|----|--------|--------|----|--------|--------|
| Model | MGS104812 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Item | Line Regulation | Temperature 25°C Testing Circuitry Figure A | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Object | +12V0.9A | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <p>1.Graph</p> <p style="text-align: right;"> ---□--- Load 50% —△— Load 100% </p> <p>Note: Slanted line shows the range of the rated input voltage.</p> | | <p>2.Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Input Voltage [V]</th> <th colspan="2">Output Voltage [V]</th> </tr> <tr> <th>Load 50%</th> <th>Load 100%</th> </tr> </thead> <tbody> <tr><td>33</td><td>12.025</td><td>12.024</td></tr> <tr><td>36</td><td>12.025</td><td>12.023</td></tr> <tr><td>40</td><td>12.025</td><td>12.024</td></tr> <tr><td>48</td><td>12.025</td><td>12.023</td></tr> <tr><td>55</td><td>12.025</td><td>12.024</td></tr> <tr><td>60</td><td>12.025</td><td>12.024</td></tr> <tr><td>70</td><td>12.025</td><td>12.024</td></tr> <tr><td>76</td><td>12.025</td><td>12.022</td></tr> <tr><td>80</td><td>12.025</td><td>12.024</td></tr> </tbody> </table> | Input Voltage [V] | Output Voltage [V] | | Load 50% | Load 100% | 33 | 12.025 | 12.024 | 36 | 12.025 | 12.023 | 40 | 12.025 | 12.024 | 48 | 12.025 | 12.023 | 55 | 12.025 | 12.024 | 60 | 12.025 | 12.024 | 70 | 12.025 | 12.024 | 76 | 12.025 | 12.022 | 80 | 12.025 | 12.024 |
| Input Voltage [V] | Output Voltage [V] | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Load 50% | Load 100% | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 33 | 12.025 | 12.024 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 36 | 12.025 | 12.023 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 40 | 12.025 | 12.024 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 48 | 12.025 | 12.023 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 55 | 12.025 | 12.024 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 60 | 12.025 | 12.024 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 70 | 12.025 | 12.024 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 76 | 12.025 | 12.022 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 80 | 12.025 | 12.024 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| COSEL | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--|--------------------|---|-------------------|------------------|--------------------|--|--|-------------------|-------------------|-------------------|------|--------|--------|--------|------|--------|--------|--------|------|--------|--------|--------|------|--------|--------|--------|------|--------|--------|--------|------|--------|--------|--------|------|--------|--------|--------|----|---|---|---|----|---|---|---|----|---|---|---|----|---|---|---|
| Model | MGS104812 | Temperature | 25°C | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Item | Load Regulation | Testing Circuitry | Figure A | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Object | +12V0.9A | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <p>1.Graph</p> <p> —△— Input Volt. 36V - - - □ - - - Input Volt. 48V - · - ○ - · - Input Volt. 76V </p> <p style="text-align: center;">Load Current [A]</p> | | <p>2.Values</p> <table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Output Voltage [V]</th> </tr> <tr> <th>Input Volt. 36[V]</th> <th>Input Volt. 48[V]</th> <th>Input Volt. 76[V]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>12.032</td><td>12.032</td><td>12.032</td></tr> <tr><td>0.18</td><td>12.030</td><td>12.030</td><td>12.029</td></tr> <tr><td>0.36</td><td>12.028</td><td>12.028</td><td>12.027</td></tr> <tr><td>0.54</td><td>12.027</td><td>12.026</td><td>12.026</td></tr> <tr><td>0.72</td><td>12.026</td><td>12.024</td><td>12.024</td></tr> <tr><td>0.90</td><td>12.023</td><td>12.023</td><td>12.022</td></tr> <tr><td>0.99</td><td>12.023</td><td>12.022</td><td>12.021</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table> | | Load Current [A] | Output Voltage [V] | | | Input Volt. 36[V] | Input Volt. 48[V] | Input Volt. 76[V] | 0.00 | 12.032 | 12.032 | 12.032 | 0.18 | 12.030 | 12.030 | 12.029 | 0.36 | 12.028 | 12.028 | 12.027 | 0.54 | 12.027 | 12.026 | 12.026 | 0.72 | 12.026 | 12.024 | 12.024 | 0.90 | 12.023 | 12.023 | 12.022 | 0.99 | 12.023 | 12.022 | 12.021 | -- | - | - | - | -- | - | - | - | -- | - | - | - | -- | - | - | - |
| Load Current [A] | Output Voltage [V] | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Input Volt. 36[V] | Input Volt. 48[V] | Input Volt. 76[V] | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.00 | 12.032 | 12.032 | 12.032 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.18 | 12.030 | 12.030 | 12.029 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.36 | 12.028 | 12.028 | 12.027 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.54 | 12.027 | 12.026 | 12.026 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.72 | 12.026 | 12.024 | 12.024 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.90 | 12.023 | 12.023 | 12.022 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.99 | 12.023 | 12.022 | 12.021 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -- | - | - | - | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -- | - | - | - | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -- | - | - | - | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -- | - | - | - | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <p>Note: Slanted line shows the range of the rated load current.</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |




| | | | |
|--------|-----------------------|-------------------|----------|
| Model | MGS104812 | Temperature | 25°C |
| Item | Dynamic Load Response | Testing Circuitry | Figure A |
| Object | +12V0.9A | | |

Input Volt. 48 V
Cycle 100 ms




Min. Load (0A) ←→
Load 100% (0.9A)

500 mV/div

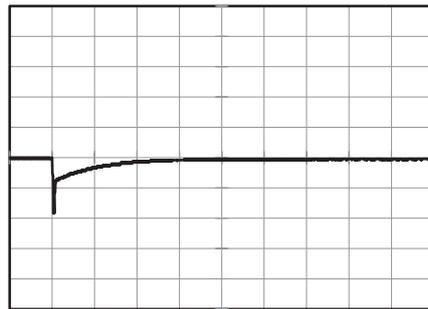


2 ms/div

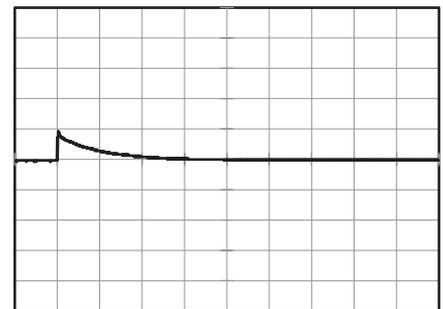


2 ms/div

Min. Load (0A) ←→
Load 50% (0.45A)

500 mV/div

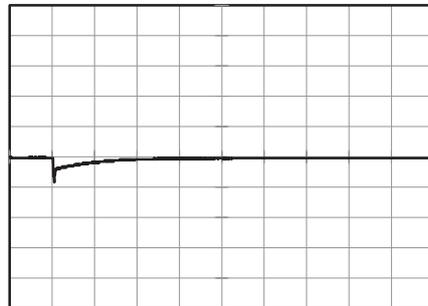


2 ms/div

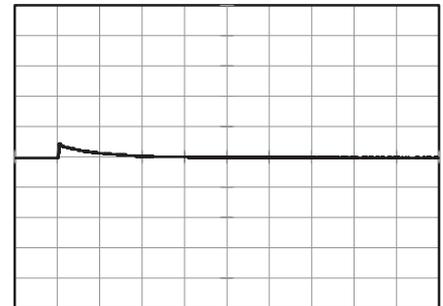


2 ms/div

Load 50% (0.45A) ←→
Load 100% (0.9A)

500 mV/div

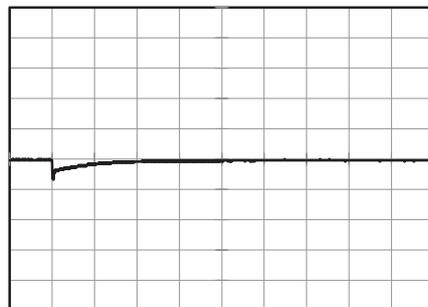

2 ms/div

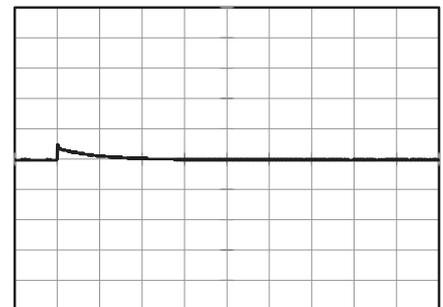

2 ms/div



| <p>Model MGS104812</p> | | <p>Temperature 25°C Testing Circuitry Figure B</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--|----------------------------------|--|------------------|---------------------|--|--------------------|--------------------|------|---|----|------|----|----|------|----|----|------|----|----|------|----|----|------|----|----|------|----|----|----|---|---|----|---|---|----|---|---|----|---|---|
| Item | Ripple Voltage (by Load Current) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Object | +12V0.9A | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <p>1.Graph</p> | | <p>2.Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="2">Ripple Voltage [mV]</th> </tr> <tr> <th>Input Volt. 36 [V]</th> <th>Input Volt. 76 [V]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>5</td><td>45</td></tr> <tr><td>0.18</td><td>10</td><td>15</td></tr> <tr><td>0.36</td><td>10</td><td>20</td></tr> <tr><td>0.54</td><td>10</td><td>15</td></tr> <tr><td>0.72</td><td>15</td><td>15</td></tr> <tr><td>0.90</td><td>20</td><td>10</td></tr> <tr><td>0.99</td><td>25</td><td>15</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> </tbody> </table> | Load Current [A] | Ripple Voltage [mV] | | Input Volt. 36 [V] | Input Volt. 76 [V] | 0.00 | 5 | 45 | 0.18 | 10 | 15 | 0.36 | 10 | 20 | 0.54 | 10 | 15 | 0.72 | 15 | 15 | 0.90 | 20 | 10 | 0.99 | 25 | 15 | -- | - | - | -- | - | - | -- | - | - | -- | - | - |
| Load Current [A] | Ripple Voltage [mV] | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Input Volt. 36 [V] | Input Volt. 76 [V] | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.00 | 5 | 45 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.18 | 10 | 15 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.36 | 10 | 20 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.54 | 10 | 15 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.72 | 15 | 15 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.90 | 20 | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.99 | 25 | 15 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -- | - | - | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -- | - | - | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -- | - | - | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -- | - | - | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <p>Measured by 100 MHz Oscilloscope. Ripple Voltage is shown as p-p in the figure below. Note: Slanted line shows the range of the rated load current.</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <p>Ripple [mVp-p]</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <p>Fig.Complex Ripple Wave Form</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| <p>Model MGS104812</p> <p>Item Ripple-Noise</p> <p>Object +12V0.9A</p> | | <p>Temperature 25°C</p> <p>Testing Circuitry Figure B</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--|--------------------|---|------------------|-------------------|--|--------------------|--------------------|------|----|----|------|----|----|------|----|----|------|----|----|------|----|----|------|----|----|------|----|----|----|---|---|----|---|---|----|---|---|----|---|---|
| <p>1.Graph</p> <div style="text-align: right;"> <p>—△— Input Volt. 36V</p> <p>-·-○-·- Input Volt. 76V</p> </div> <p>Measured by 100 MHz Oscilloscope. Ripple-Noise is shown as p-p in the figure below. Note: Slanted line shows the range of the rated load current.</p> <p>Ripple Noise[mVp-p]</p> <p>Fig.Complex Ripple Noise Wave Form</p> | | <p>2.Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="2">Ripple-Noise [mV]</th> </tr> <tr> <th>Input Volt. 36 [V]</th> <th>Input Volt. 76 [V]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>15</td><td>50</td></tr> <tr><td>0.18</td><td>10</td><td>20</td></tr> <tr><td>0.36</td><td>15</td><td>25</td></tr> <tr><td>0.54</td><td>25</td><td>25</td></tr> <tr><td>0.72</td><td>25</td><td>30</td></tr> <tr><td>0.90</td><td>40</td><td>25</td></tr> <tr><td>0.99</td><td>45</td><td>30</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> </tbody> </table> | Load Current [A] | Ripple-Noise [mV] | | Input Volt. 36 [V] | Input Volt. 76 [V] | 0.00 | 15 | 50 | 0.18 | 10 | 20 | 0.36 | 15 | 25 | 0.54 | 25 | 25 | 0.72 | 25 | 30 | 0.90 | 40 | 25 | 0.99 | 45 | 30 | -- | - | - | -- | - | - | -- | - | - | -- | - | - |
| Load Current [A] | Ripple-Noise [mV] | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Input Volt. 36 [V] | Input Volt. 76 [V] | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.00 | 15 | 50 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.18 | 10 | 20 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.36 | 15 | 25 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.54 | 25 | 25 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.72 | 25 | 30 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.90 | 40 | 25 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.99 | 45 | 30 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -- | - | - | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -- | - | - | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -- | - | - | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -- | - | - | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| COSEL | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---|-----------------------------------|--|--------------------------|---------------------|--|----------|-----------|-----|----|----|-----|----|----|-----|----|----|---|----|----|----|----|----|----|----|----|----|----|----|----|---|---|----|---|---|----|---|---|----|---|---|
| Model | MGS104812 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Item | Ripple Voltage (by Ambient Temp.) | Testing Circuitry Figure B | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Object | +12V0.9A | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <p>1.Graph</p> <p style="text-align: center;">Ambient Temperature [°C] Input Volt. 48V</p> | | <p>2.Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Ambient Temperature [°C]</th> <th colspan="2">Ripple Voltage [mV]</th> </tr> <tr> <th>Load 50%</th> <th>Load 100%</th> </tr> </thead> <tbody> <tr><td>-60</td><td>10</td><td>20</td></tr> <tr><td>-40</td><td>10</td><td>20</td></tr> <tr><td>-20</td><td>10</td><td>20</td></tr> <tr><td>0</td><td>10</td><td>15</td></tr> <tr><td>25</td><td>10</td><td>15</td></tr> <tr><td>65</td><td>10</td><td>20</td></tr> <tr><td>75</td><td>10</td><td>20</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> </tbody> </table> | Ambient Temperature [°C] | Ripple Voltage [mV] | | Load 50% | Load 100% | -60 | 10 | 20 | -40 | 10 | 20 | -20 | 10 | 20 | 0 | 10 | 15 | 25 | 10 | 15 | 65 | 10 | 20 | 75 | 10 | 20 | -- | - | - | -- | - | - | -- | - | - | -- | - | - |
| Ambient Temperature [°C] | Ripple Voltage [mV] | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Load 50% | Load 100% | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -60 | 10 | 20 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -40 | 10 | 20 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -20 | 10 | 20 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0 | 10 | 15 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 25 | 10 | 15 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 65 | 10 | 20 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 75 | 10 | 20 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -- | - | - | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -- | - | - | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -- | - | - | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -- | - | - | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <p>Measured by 100 MHz Oscilloscope. Note: Slanted line shows the range of the rated ambient temperature.</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| COSEL | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---|--|--|--------------------------|--------------------|--|--|-------------------|-------------------|-------------------|-----|--------|--------|--------|-----|--------|--------|--------|-----|--------|--------|--------|---|--------|--------|--------|----|--------|--------|--------|----|--------|--------|--------|----|--------|--------|--------|----|---|---|---|----|---|---|---|----|---|---|---|----|---|---|---|
| Model | MGS104812 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Item | Ambient Temperature Drift | Testing Circuitry Figure A | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Object | +12V0.9A | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1.Graph | <p> —△— Input Volt. 36V - - - □ - - - Input Volt. 48V ···○··· Input Volt. 76V </p> <p style="text-align: center;">Ambient Temperature [°C] Load 100%</p> | 2.Values | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | <table border="1"> <thead> <tr> <th rowspan="2">Ambient Temperature [°C]</th> <th colspan="3">Output Voltage [V]</th> </tr> <tr> <th>Input Volt. 36[V]</th> <th>Input Volt. 48[V]</th> <th>Input Volt. 76[V]</th> </tr> </thead> <tbody> <tr><td>-60</td><td>11.928</td><td>11.928</td><td>11.929</td></tr> <tr><td>-40</td><td>11.958</td><td>11.959</td><td>11.960</td></tr> <tr><td>-20</td><td>11.986</td><td>11.987</td><td>11.988</td></tr> <tr><td>0</td><td>12.006</td><td>12.006</td><td>12.007</td></tr> <tr><td>25</td><td>12.023</td><td>12.023</td><td>12.022</td></tr> <tr><td>65</td><td>12.029</td><td>12.029</td><td>12.030</td></tr> <tr><td>75</td><td>12.028</td><td>12.028</td><td>12.029</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table> | Ambient Temperature [°C] | Output Voltage [V] | | | Input Volt. 36[V] | Input Volt. 48[V] | Input Volt. 76[V] | -60 | 11.928 | 11.928 | 11.929 | -40 | 11.958 | 11.959 | 11.960 | -20 | 11.986 | 11.987 | 11.988 | 0 | 12.006 | 12.006 | 12.007 | 25 | 12.023 | 12.023 | 12.022 | 65 | 12.029 | 12.029 | 12.030 | 75 | 12.028 | 12.028 | 12.029 | -- | - | - | - | -- | - | - | - | -- | - | - | - | -- | - | - | - |
| Ambient Temperature [°C] | Output Voltage [V] | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Input Volt. 36[V] | Input Volt. 48[V] | Input Volt. 76[V] | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -60 | 11.928 | 11.928 | 11.929 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -40 | 11.958 | 11.959 | 11.960 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -20 | 11.986 | 11.987 | 11.988 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0 | 12.006 | 12.006 | 12.007 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 25 | 12.023 | 12.023 | 12.022 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 65 | 12.029 | 12.029 | 12.030 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 75 | 12.028 | 12.028 | 12.029 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -- | - | - | - | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -- | - | - | - | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -- | - | - | - | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -- | - | - | - | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <p>Note: Slanted line shows the range of the rated ambient temperature.</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| | | |
|--------------|-------------------------|----------------------------|
| COSEL | | |
| Model | MGS104812 | |
| Item | Output Voltage Accuracy | Testing Circuitry Figure A |
| Object | +12V0.9A | |

1. Output Voltage Accuracy

This is defined as the value of the output voltage, regulation load, ambient temperature and input voltage varied at random in the range as specified below.

Temperature : -40 - 65°C

Input Voltage : 36 - 76V

Load Current : 0 - 0.9A

* Output Voltage Accuracy = $\pm(\text{Maximum of Output Voltage} - \text{Minimum of Output Voltage}) / 2$

* Output Voltage Accuracy (Ratio) = $\frac{\text{Output Voltage Accuracy}}{\text{Rated Output Voltage}} \times 100$

2. Values

| Item | Temperature [°C] | Input Voltage[V] | Output | | Output Voltage Accuracy | |
|-----------------|------------------|------------------|------------|------------|-------------------------|-----------|
| | | | Current[A] | Voltage[V] | Value [mV] | Ratio [%] |
| Maximum Voltage | 65 | 76 | 0 | 12.039 | ±41 | ±0.3 |
| Minimum Voltage | -40 | 36 | 0.9 | 11.958 | | |




| COSEL | | | | | | | | | | | | | | | | | | | | | | | | |
|---|--------------------|--|----------------------|--------------------|-----|--------|-----|--------|-----|--------|-----|--------|-----|--------|-----|--------|-----|--------|-----|--------|-----|--------|-----|--------|
| Model | MGS104812 | | | | | | | | | | | | | | | | | | | | | | | |
| Item | Time Lapse Drift | Temperature 25°C Testing Circuitry Figure A | | | | | | | | | | | | | | | | | | | | | | |
| Object | +12V0.9A | | | | | | | | | | | | | | | | | | | | | | | |
| <p>1.Graph</p> <p style="text-align: center;">Time [H]</p> <p>Input Volt. 48V Load 100%</p> | | <p>2.Values</p> <table border="1"> <thead> <tr> <th>Time since start [H]</th> <th>Output Voltage [V]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>12.033</td></tr> <tr><td>0.5</td><td>12.041</td></tr> <tr><td>1.0</td><td>12.041</td></tr> <tr><td>2.0</td><td>12.041</td></tr> <tr><td>3.0</td><td>12.041</td></tr> <tr><td>4.0</td><td>12.041</td></tr> <tr><td>5.0</td><td>12.041</td></tr> <tr><td>6.0</td><td>12.041</td></tr> <tr><td>7.0</td><td>12.041</td></tr> <tr><td>8.0</td><td>12.041</td></tr> </tbody> </table> | Time since start [H] | Output Voltage [V] | 0.0 | 12.033 | 0.5 | 12.041 | 1.0 | 12.041 | 2.0 | 12.041 | 3.0 | 12.041 | 4.0 | 12.041 | 5.0 | 12.041 | 6.0 | 12.041 | 7.0 | 12.041 | 8.0 | 12.041 |
| Time since start [H] | Output Voltage [V] | | | | | | | | | | | | | | | | | | | | | | | |
| 0.0 | 12.033 | | | | | | | | | | | | | | | | | | | | | | | |
| 0.5 | 12.041 | | | | | | | | | | | | | | | | | | | | | | | |
| 1.0 | 12.041 | | | | | | | | | | | | | | | | | | | | | | | |
| 2.0 | 12.041 | | | | | | | | | | | | | | | | | | | | | | | |
| 3.0 | 12.041 | | | | | | | | | | | | | | | | | | | | | | | |
| 4.0 | 12.041 | | | | | | | | | | | | | | | | | | | | | | | |
| 5.0 | 12.041 | | | | | | | | | | | | | | | | | | | | | | | |
| 6.0 | 12.041 | | | | | | | | | | | | | | | | | | | | | | | |
| 7.0 | 12.041 | | | | | | | | | | | | | | | | | | | | | | | |
| 8.0 | 12.041 | | | | | | | | | | | | | | | | | | | | | | | |



| | | | |
|--------|--------------------|-------------------|----------|
| Model | MGS104812 | Temperature | 25°C |
| Item | Rise and Fall Time | Testing Circuitry | Figure A |
| Object | +12V0.9A | | |


1. Graph

Input Volt. 48 V

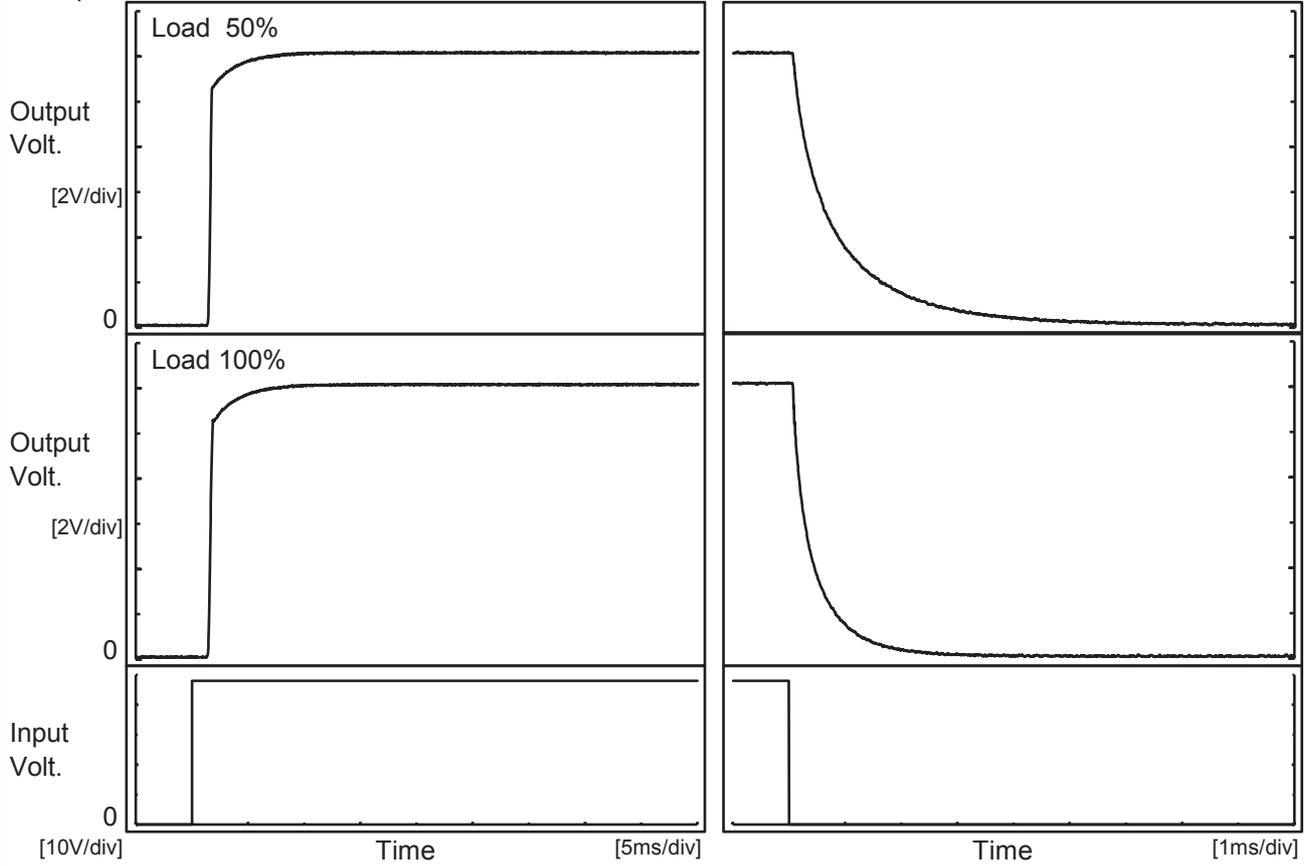

2. Values

| Load | Time | [ms] | | | | |
|-------|------|------|-----|-----|-----|-----|
| | | Td | Tr | Ts | Th | Tf |
| 50 % | | 1.5 | 0.7 | 2.2 | 0.1 | 2.1 |
| 100 % | | 1.5 | 0.9 | 2.4 | 0.1 | 1.0 |

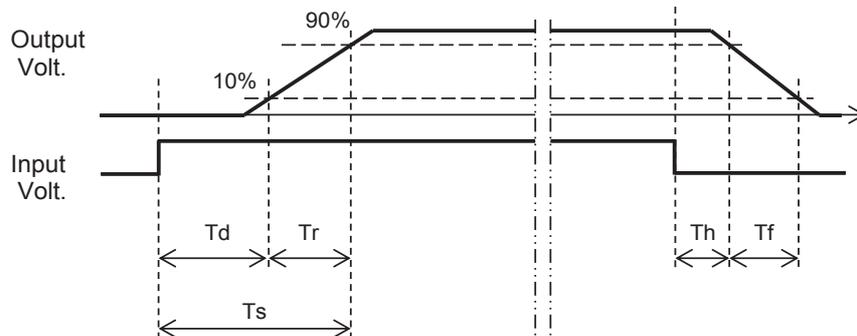



| COSEL | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--|--|--|--------------------------|-------------------|--|----------|-----------|-----|------|------|-----|------|------|-----|------|------|---|------|------|----|------|------|----|------|------|----|------|------|----|---|---|----|---|---|----|---|---|----|---|---|
| Model | MGS104812 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Item | Minimum Input Voltage for Regulated Output Voltage | Testing Circuitry Figure A | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Object | +12V0.9A | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <p>1.Graph</p> <p style="text-align: right;"> ---□--- Load 50% —△— Load 100% </p> | | <p>2.Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Ambient Temperature [°C]</th> <th colspan="2">Input Voltage [V]</th> </tr> <tr> <th>Load 50%</th> <th>Load 100%</th> </tr> </thead> <tbody> <tr><td>-60</td><td>29.8</td><td>29.8</td></tr> <tr><td>-40</td><td>29.6</td><td>29.8</td></tr> <tr><td>-20</td><td>29.4</td><td>29.6</td></tr> <tr><td>0</td><td>29.0</td><td>29.4</td></tr> <tr><td>25</td><td>28.8</td><td>29.2</td></tr> <tr><td>65</td><td>28.4</td><td>29.0</td></tr> <tr><td>75</td><td>28.2</td><td>28.6</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> </tbody> </table> | Ambient Temperature [°C] | Input Voltage [V] | | Load 50% | Load 100% | -60 | 29.8 | 29.8 | -40 | 29.6 | 29.8 | -20 | 29.4 | 29.6 | 0 | 29.0 | 29.4 | 25 | 28.8 | 29.2 | 65 | 28.4 | 29.0 | 75 | 28.2 | 28.6 | -- | - | - | -- | - | - | -- | - | - | -- | - | - |
| Ambient Temperature [°C] | Input Voltage [V] | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Load 50% | Load 100% | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -60 | 29.8 | 29.8 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -40 | 29.6 | 29.8 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -20 | 29.4 | 29.6 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0 | 29.0 | 29.4 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 25 | 28.8 | 29.2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 65 | 28.4 | 29.0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 75 | 28.2 | 28.6 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -- | - | - | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -- | - | - | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -- | - | - | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -- | - | - | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <p>Note: Slanted line shows the range of the rated ambient temperature.</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| <p>Model MGS104812</p> | | <p>Temperature 25°C Testing Circuitry Figure A</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--|-------------------|---|--------------------|------------------|--|--|-------------------|-------------------|-------------------|------|------|------|------|------|------|------|------|------|------|------|------|-----|------|------|------|-----|------|------|------|-----|------|------|------|-----|------|------|------|-----|------|------|------|-----|------|------|------|-----|------|------|------|-----|------|------|------|-----|------|------|------|
| <p>Item Overcurrent Protection</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <p>Object +12V0.9A</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <p>1.Graph</p> <div style="display: flex; align-items: flex-start;"> <div style="margin-right: 20px;"> <p>— Input Volt. 36V</p> <p>— Input Volt. 48V</p> <p>— Input Volt. 76V</p> </div> </div> <p>Note: Slanted line shows the range of the rated load current.</p> | | <p>2.Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Output Voltage [V]</th> <th colspan="3">Load Current [A]</th> </tr> <tr> <th>Input Volt. 36[V]</th> <th>Input Volt. 48[V]</th> <th>Input Volt. 76[V]</th> </tr> </thead> <tbody> <tr><td>12.0</td><td>0.90</td><td>0.90</td><td>0.90</td></tr> <tr><td>11.4</td><td>1.15</td><td>1.14</td><td>1.17</td></tr> <tr><td>10.8</td><td>1.18</td><td>1.17</td><td>1.20</td></tr> <tr><td>9.6</td><td>1.26</td><td>1.23</td><td>1.25</td></tr> <tr><td>8.4</td><td>1.34</td><td>1.31</td><td>1.31</td></tr> <tr><td>7.2</td><td>1.43</td><td>1.39</td><td>1.38</td></tr> <tr><td>6.0</td><td>1.53</td><td>1.47</td><td>1.46</td></tr> <tr><td>4.8</td><td>1.62</td><td>1.56</td><td>1.53</td></tr> <tr><td>3.6</td><td>1.74</td><td>1.65</td><td>1.61</td></tr> <tr><td>2.4</td><td>1.89</td><td>1.78</td><td>1.71</td></tr> <tr><td>1.2</td><td>2.01</td><td>1.89</td><td>1.79</td></tr> <tr><td>0.0</td><td>2.09</td><td>1.91</td><td>1.77</td></tr> </tbody> </table> | Output Voltage [V] | Load Current [A] | | | Input Volt. 36[V] | Input Volt. 48[V] | Input Volt. 76[V] | 12.0 | 0.90 | 0.90 | 0.90 | 11.4 | 1.15 | 1.14 | 1.17 | 10.8 | 1.18 | 1.17 | 1.20 | 9.6 | 1.26 | 1.23 | 1.25 | 8.4 | 1.34 | 1.31 | 1.31 | 7.2 | 1.43 | 1.39 | 1.38 | 6.0 | 1.53 | 1.47 | 1.46 | 4.8 | 1.62 | 1.56 | 1.53 | 3.6 | 1.74 | 1.65 | 1.61 | 2.4 | 1.89 | 1.78 | 1.71 | 1.2 | 2.01 | 1.89 | 1.79 | 0.0 | 2.09 | 1.91 | 1.77 |
| Output Voltage [V] | Load Current [A] | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Input Volt. 36[V] | Input Volt. 48[V] | Input Volt. 76[V] | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 12.0 | 0.90 | 0.90 | 0.90 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 11.4 | 1.15 | 1.14 | 1.17 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 10.8 | 1.18 | 1.17 | 1.20 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 9.6 | 1.26 | 1.23 | 1.25 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 8.4 | 1.34 | 1.31 | 1.31 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 7.2 | 1.43 | 1.39 | 1.38 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 6.0 | 1.53 | 1.47 | 1.46 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4.8 | 1.62 | 1.56 | 1.53 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3.6 | 1.74 | 1.65 | 1.61 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2.4 | 1.89 | 1.78 | 1.71 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1.2 | 2.01 | 1.89 | 1.79 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.0 | 2.09 | 1.91 | 1.77 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| <p>Model MGS104812</p> | | <p>Temperature 25°C Testing Circuitry Figure A</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--|--|--|-------------------|-----------------|--|--|-------------------|-------------------|-------------------|------|-----|-----|-----|------|-----|-----|-----|------|-----|-----|-----|------|-----|-----|-----|------|-----|-----|-----|------|-----|-----|-----|------|-----|-----|-----|------|-----|-----|-----|----|---|---|---|----|---|---|---|----|---|---|---|
| <p>Item</p> | <p>Switching Frequency (by Load Current)</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <p>Object</p> | <p>+12V0.9A</p> | <p>2.Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Frequency [kHz]</th> </tr> <tr> <th>Input Volt. 36[V]</th> <th>Input Volt. 48[V]</th> <th>Input Volt. 76[V]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>612</td><td>648</td><td>685</td></tr> <tr><td>0.18</td><td>431</td><td>478</td><td>539</td></tr> <tr><td>0.36</td><td>330</td><td>379</td><td>440</td></tr> <tr><td>0.45</td><td>296</td><td>343</td><td>404</td></tr> <tr><td>0.54</td><td>269</td><td>314</td><td>372</td></tr> <tr><td>0.72</td><td>226</td><td>267</td><td>323</td></tr> <tr><td>0.90</td><td>195</td><td>233</td><td>285</td></tr> <tr><td>0.99</td><td>183</td><td>219</td><td>270</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table> | Load Current [A] | Frequency [kHz] | | | Input Volt. 36[V] | Input Volt. 48[V] | Input Volt. 76[V] | 0.00 | 612 | 648 | 685 | 0.18 | 431 | 478 | 539 | 0.36 | 330 | 379 | 440 | 0.45 | 296 | 343 | 404 | 0.54 | 269 | 314 | 372 | 0.72 | 226 | 267 | 323 | 0.90 | 195 | 233 | 285 | 0.99 | 183 | 219 | 270 | -- | - | - | - | -- | - | - | - | -- | - | - | - |
| Load Current [A] | Frequency [kHz] | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Input Volt. 36[V] | Input Volt. 48[V] | Input Volt. 76[V] | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.00 | 612 | 648 | 685 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.18 | 431 | 478 | 539 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.36 | 330 | 379 | 440 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.45 | 296 | 343 | 404 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.54 | 269 | 314 | 372 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.72 | 226 | 267 | 323 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.90 | 195 | 233 | 285 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.99 | 183 | 219 | 270 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -- | - | - | - | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -- | - | - | - | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| -- | - | - | - | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <p>1.Graph</p> <p> —△— Input Volt. 36V - - - □ - - - Input Volt. 48V - · - ○ - · - - Input Volt. 76V </p> <p>Note: Slanted line shows the range of the rated load current.</p> <p>-When load current is low, MG operates intermittently, so switching frequency would not become constant.</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

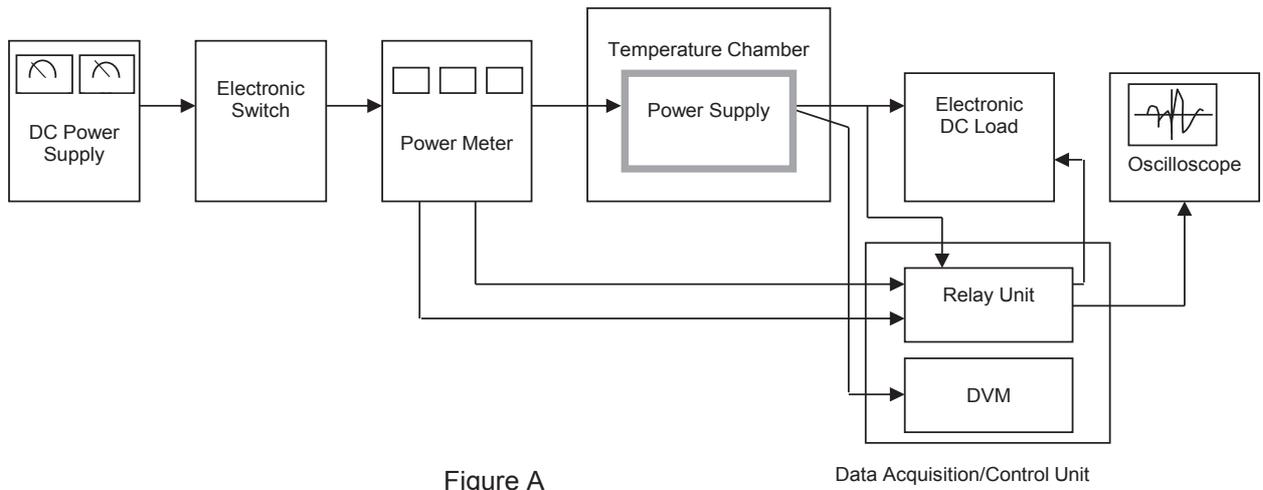


Figure A

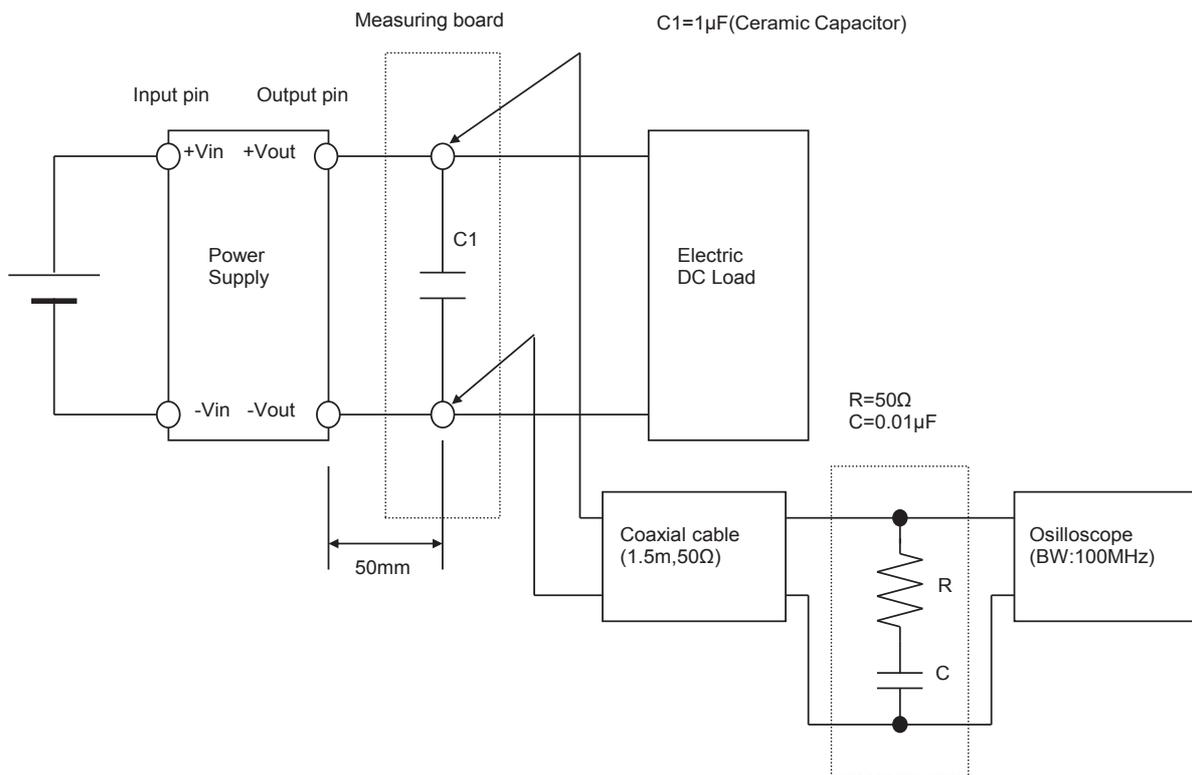


Figure B (Ripple and Ripple noise Characteristic)