



## DATA SHEET

Model	MHFS6483R3	Date	05-Nov-21
Test	EMI	Temp.	25 degreeC
	Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	E.Ushitani

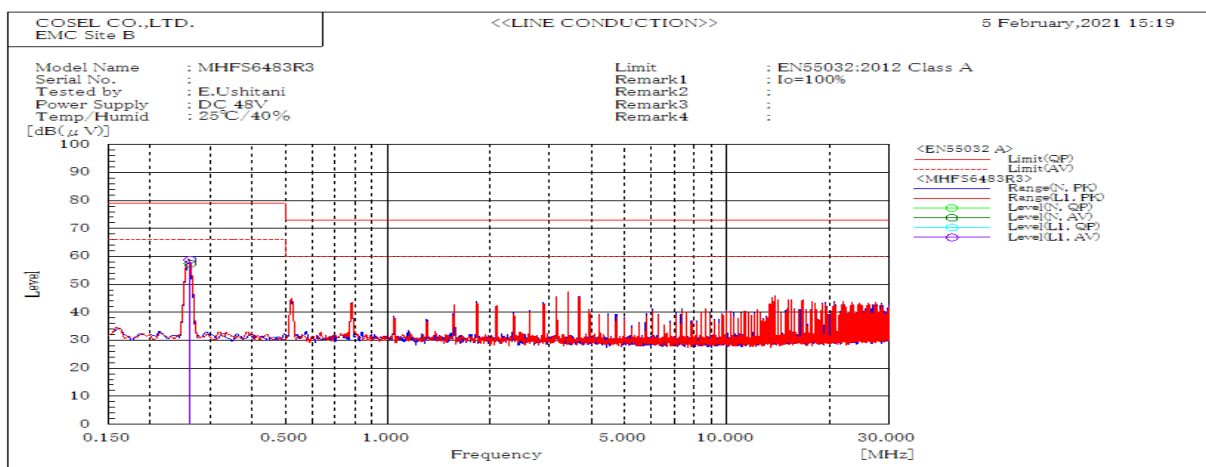


Frequency	Line	Level		Limit		Margin		Pass/Fail	Remark
MHz		dB(μV)		dB(μV)		dB			
		QP	AV	QP	AV	QP	AV		
0.262	N	57.4	57.4	79	66	21.6	8.6	Pass	
0.262	L1	58.8	58.8	79	66	20.2	7.2	Pass	

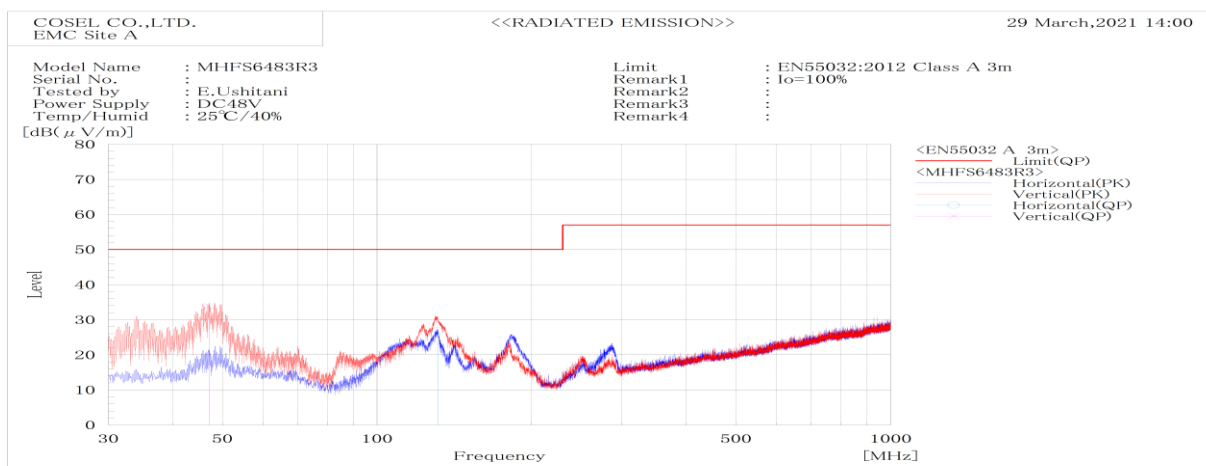


Frequency	Polarization	Stability	Level	Limit	Margin	Pass/Fail	Height	Angle	Remark
MHz			dB(μV/m)	dB(μV/m)	dB		cm	deg	
			QP	QP	QP				
131.264	H	Stable	26.8	50	23.2	Pass	220.4	230.1	
47.163	V	Stable	33.9	50	16.1	Pass	100.2	355.5	

DATA SHEET		Date	05-Nov-21
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	E.Ushitani

### 1. Line conduction

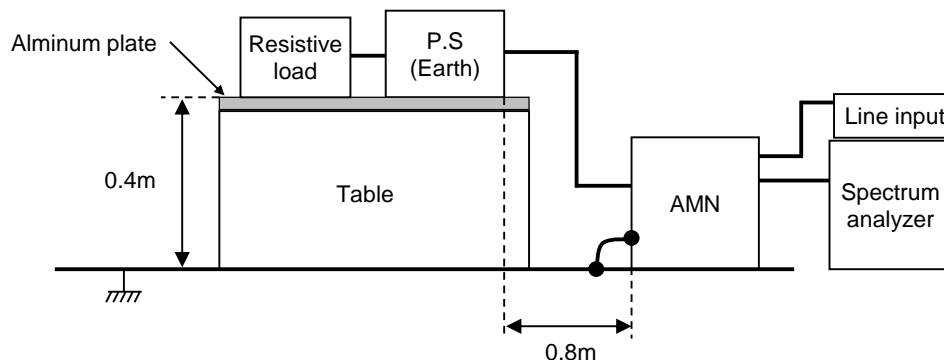

### 2. Radiated emission

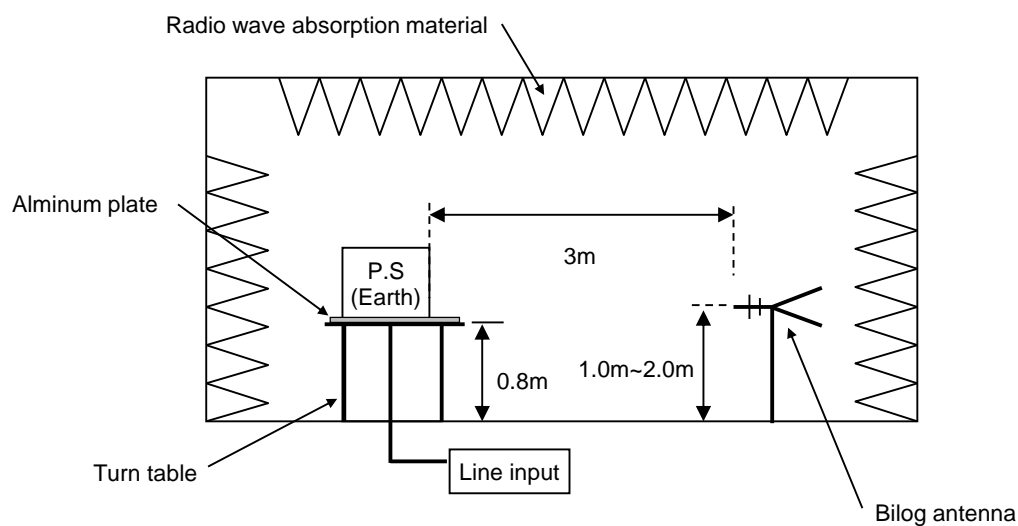


## Conditions

Test : EMI  
Model Name: MHFS6□□

## ○Photographs of Test Set-Up

### LINE CONDUCTION

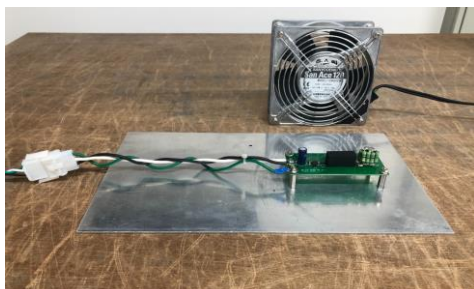

### RADIATED EMISSION



## ○Testing circuitry

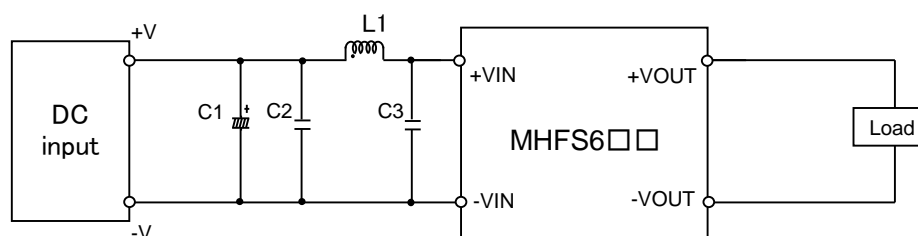


Fig.1 Testing circuitry

C1 :	MHFS612□□	50V 100 $\mu$ F Electric capacitor (LXZseries NIPPON CHEMI-CON)
	MHFS624□□	-
	MHFS648□□	-
C2 :	MHFS612□□	25V 10 $\mu$ F Ceramic capacitor (GRM31CR71E106K MURATA MANUFACTURING)
	MHFS624□□	50V 4.7 $\mu$ F Ceramic capacitor (GRM31CR71H475K MURATA MANUFACTURING)
	MHFS648□□	100V 2.2 $\mu$ F Ceramic capacitor (HMK316AC7225KLHTE TAIYO YUDEN)
C3 :	MHFS612□□	25V 10 $\mu$ F Ceramic capacitor (GRM31CR71E106K MURATA MANUFACTURING)
	MHFS624□□	50V 4.7 $\mu$ F Ceramic capacitor (GRM31CR71H475K MURATA MANUFACTURING)
	MHFS648□□	100V 2.2 $\mu$ F Ceramic capacitor (HMK316AC7225KLHTE TAIYO YUDEN)
L1 :	MHFS612□□	2600mA 2.2 $\mu$ H Inductor (LQH5BPN2R2NT0 MURATA MANUFACTURING)
	MHFS624□□	1600mA 10 $\mu$ H Inductor (LQH5BPN100MT0 MURATA MANUFACTURING)
	MHFS648□□	1050mA 22 $\mu$ H Inductor (LQH5BPN220MT0 MURATA MANUFACTURING)