



TEST DATA OF NAH-60-□□□

Noise Filter
Jul. 09 , 2021

Approved by : Tadayuki Noda
Design Manager

Prepared by : Naoya Kunishima
Design Engineer

COSEL CO.,LTD.





CONTENTS

1.Attenuation Characteristics	1
2.Pulse Attenuation Characteristics	4
3.Leakage Current	6
4.Figure of Testing Circuitry	7

(Final Page 8)



COSEL

Model	NAH-60-□□□	Temperature	25°C
Item	Attenuation Characteristics	Testing Circuitry	Figure A
Object	_____		

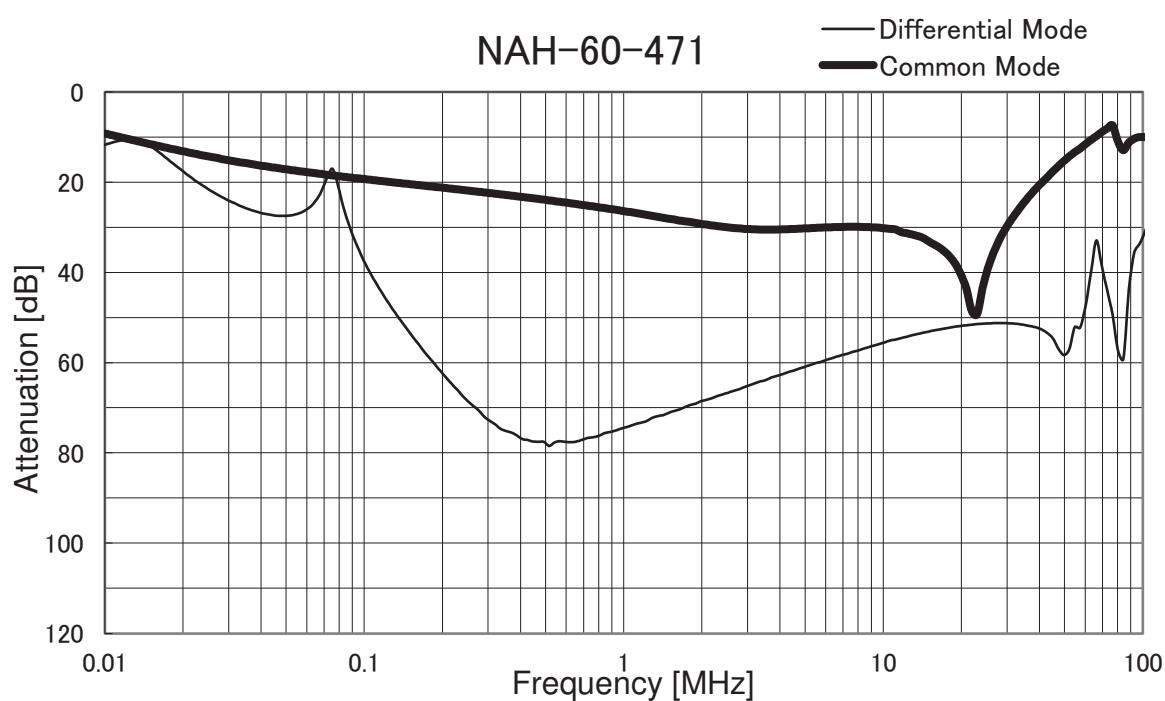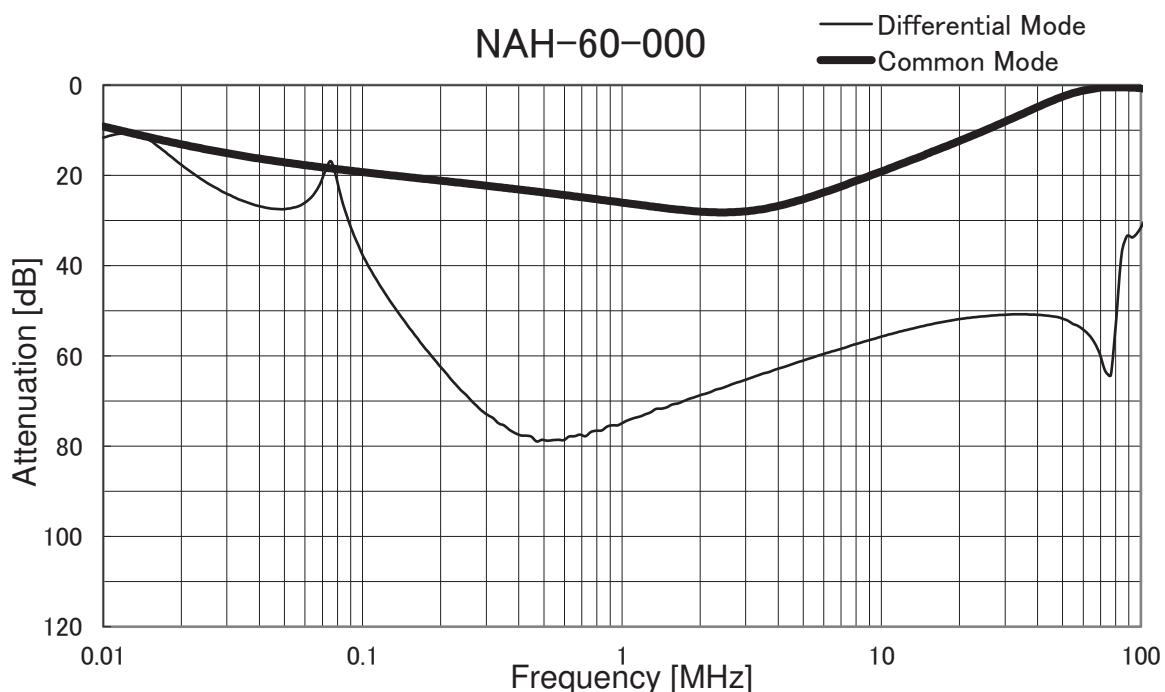



COSEL

Model	NAH-60-□□□	Temperature	25°C
Item	Attenuation Characteristics	Testing Circuitry	Figure A
Object	_____		

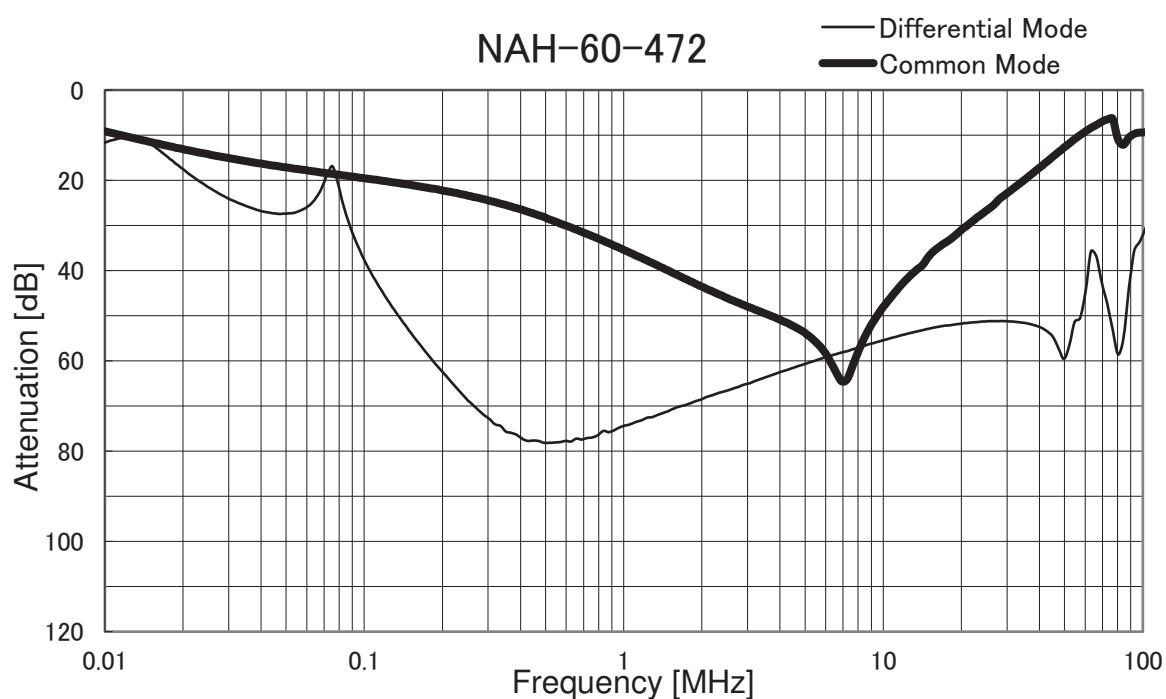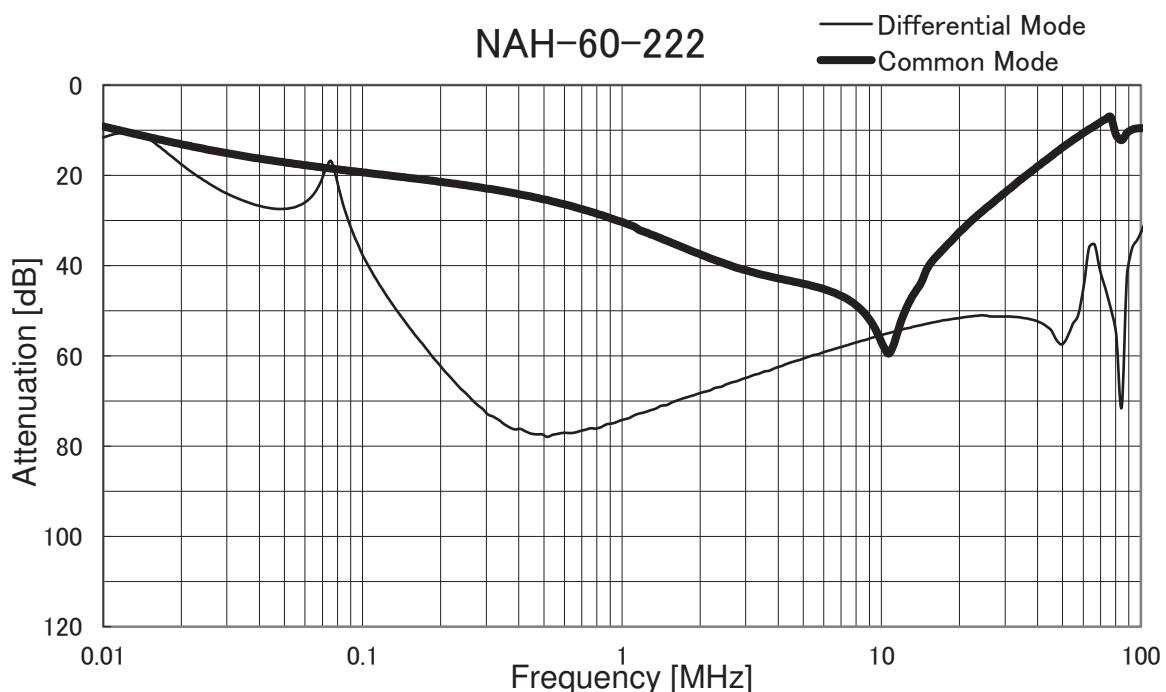





COSEL

Model	NAH-60-□□□	Temperature	25°C
Item	Attenuation Characteristics	Testing Circuitry	Figure A
Object	_____		

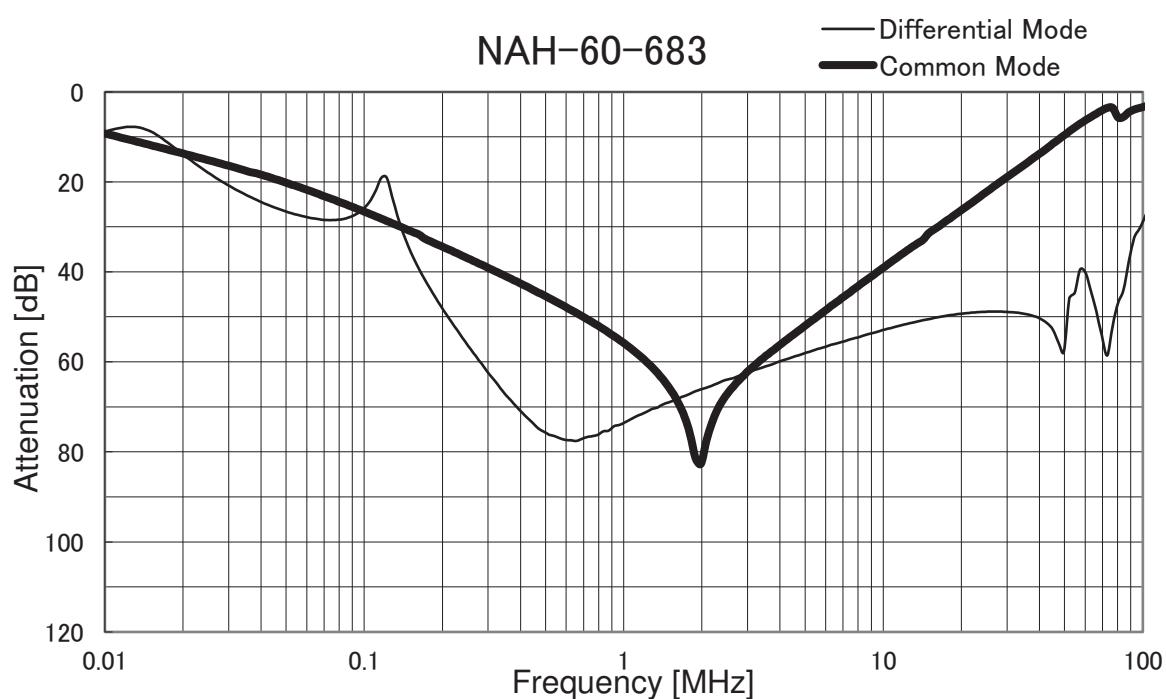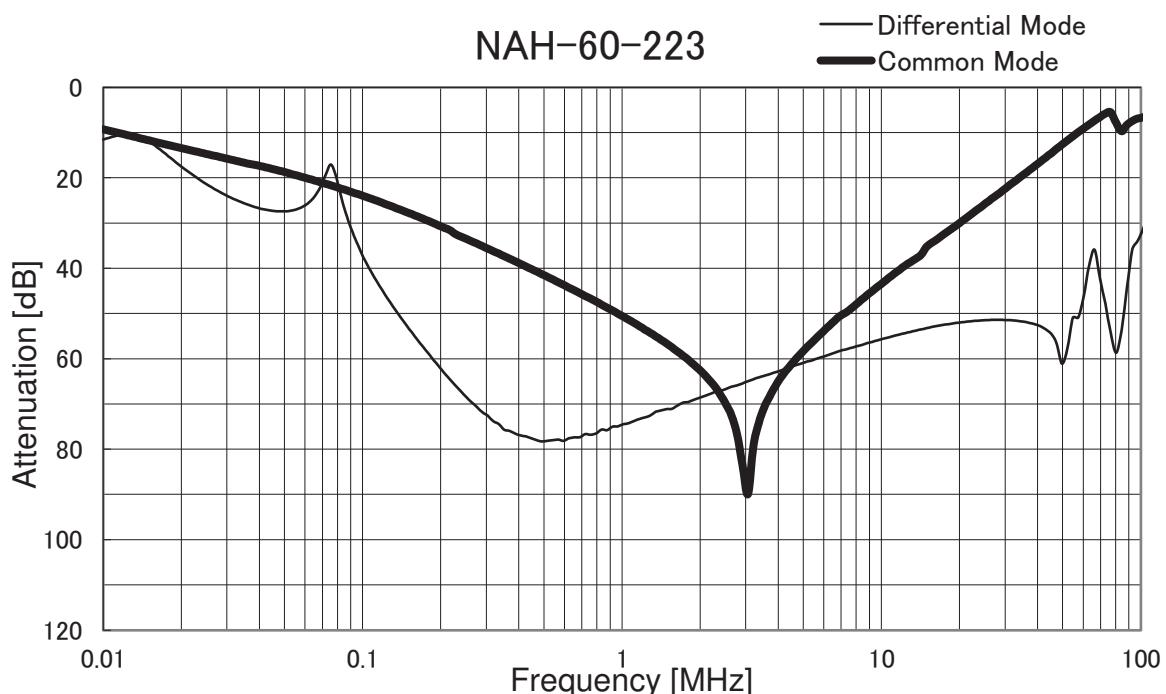



COSEL

Model	NAH-60-□□□	Temperature	25°C
Item	Pulse Attenuation Characteristics	Testing Circuitry	Figure B
Object	_____		

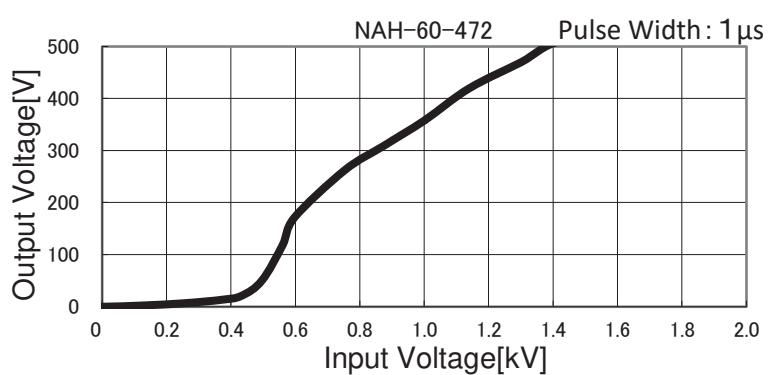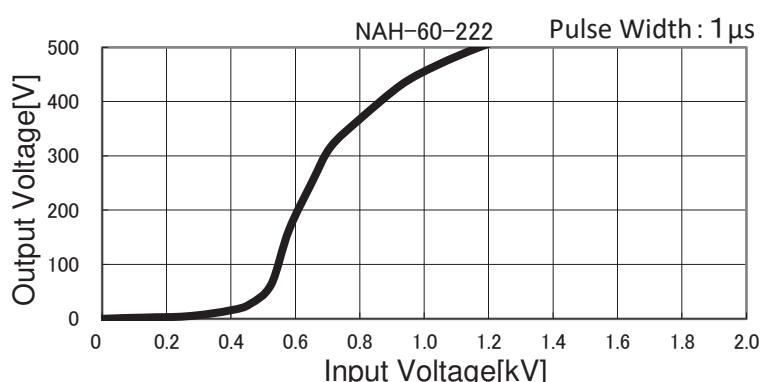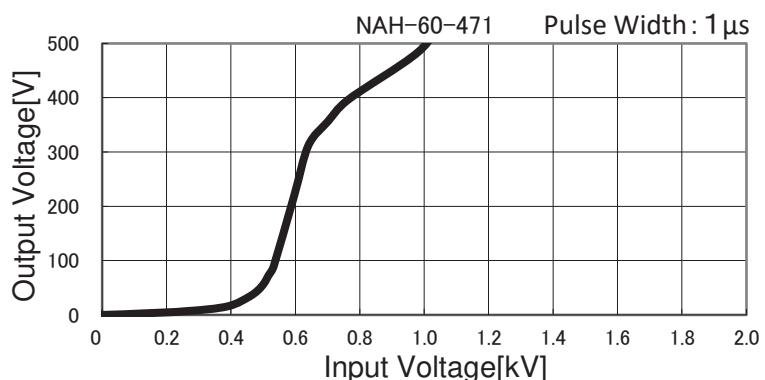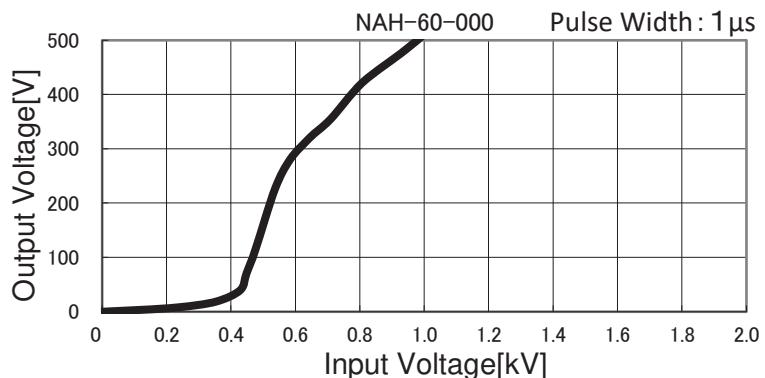

COSEL

Model	NAH-60-□□□	Temperature Testing Circuitry Figure B
Item	Pulse Attenuation Characteristics	
Object	_____	

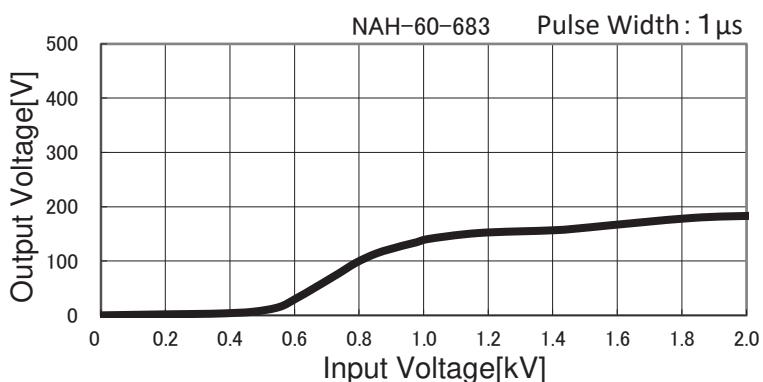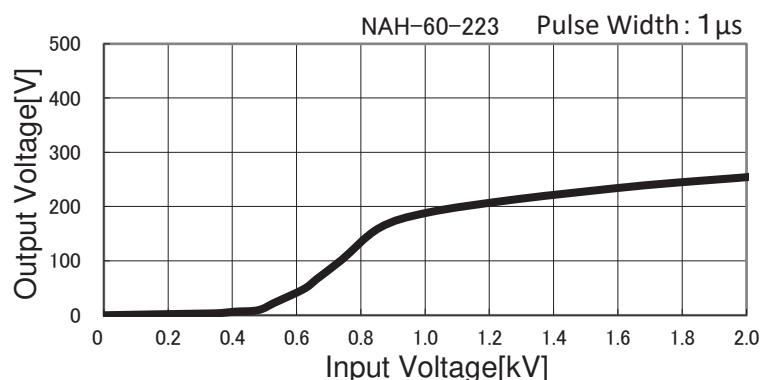



Model	NAH-60-□□□	Temperature Testing Circuitry Figure C
Item	Leakage Current	
Object	_____	

1. Results

[mA]

Model	Standards	Input Volt.					Note
		100[V]	125[V]	230[V]	250[V]	277[V]	
NAH-60-000	UL60939	0.000	0.000	0.003	0.003	0.004	
NAH-60-471	UL60939	0.025	0.033	0.070	0.077	0.087	
NAH-60-222	UL60939	0.085	0.100	0.220	0.235	0.270	
NAH-60-472	UL60939	0.175	0.225	0.480	0.530	0.600	
NAH-60-223	UL60939	0.900	1.000	1.950	2.050	2.300	
NAH-60-683	UL60939	1.200	1.500	2.800	3.000	3.450	

2. Condition

Leakage current value is concluded after measuring both phases of AC input and by choosing the larger one.

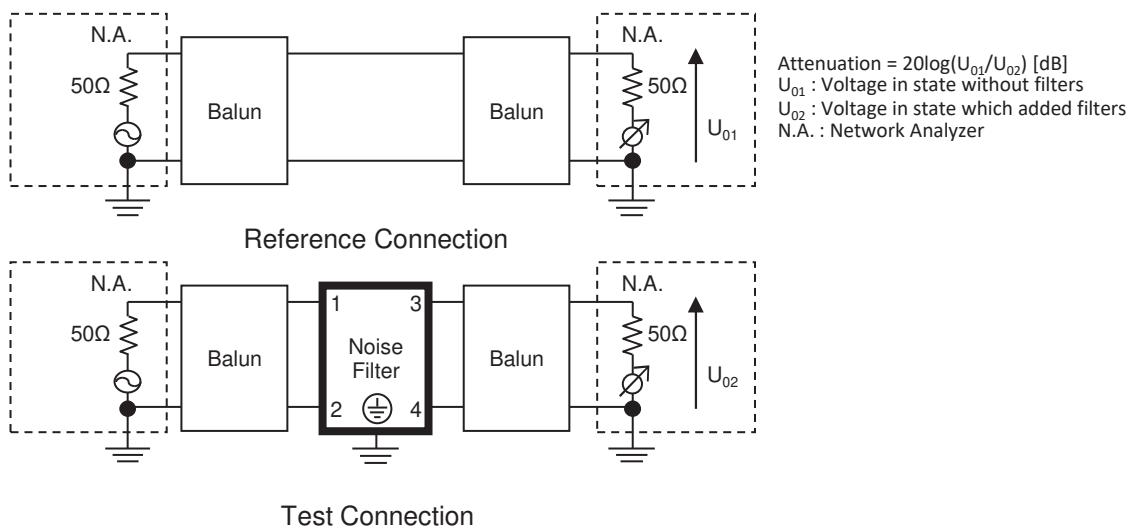


Figure A - 1 Differential mode attenuation measurement


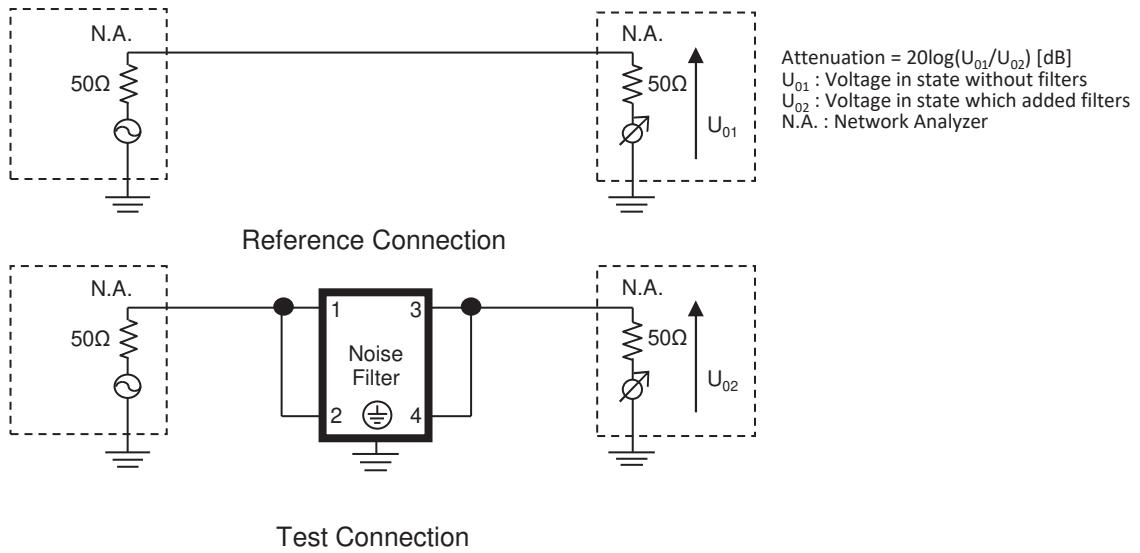


Figure A - 2 Common mode attenuation measurement

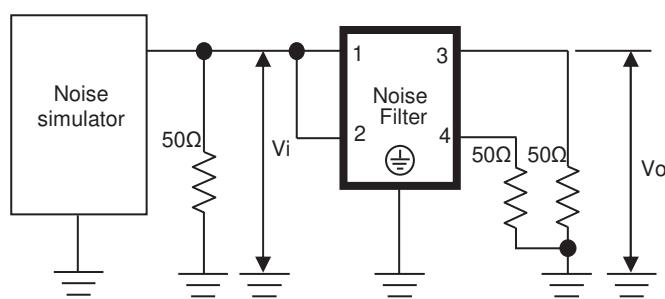

Pulse attenuation measurement

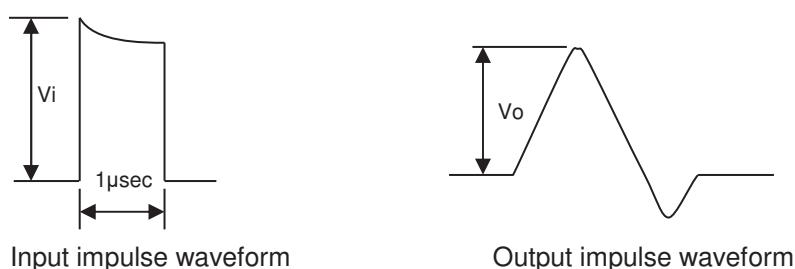


Figure B Pulse attenuation measurement

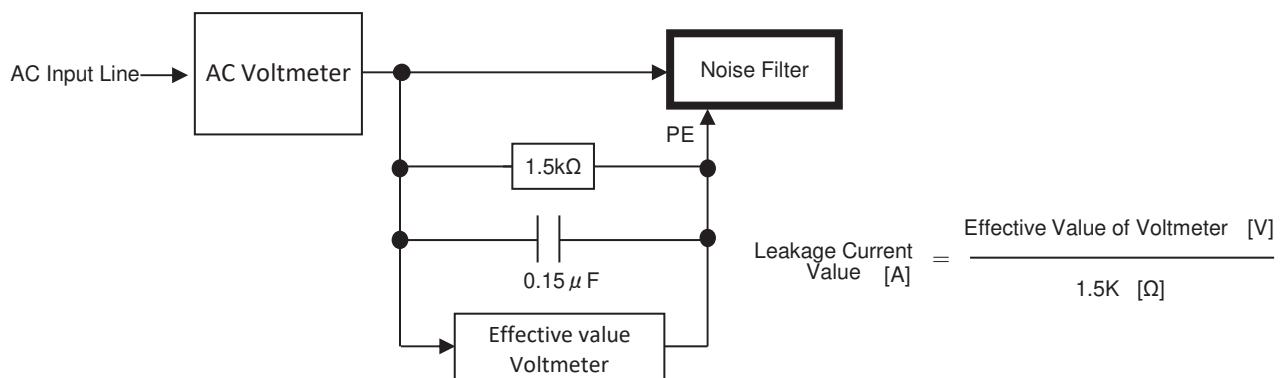


Figure C Leakage current measurement (UL60939)