



DATA SHEET		Date	25-Mar-19
Model	PCA300F-15-T	Temp.	25 degreeC
Test	EMI	Humid.	40 %RH
	Line conduction & Radiated emission	Tested by	M.Yamamoto

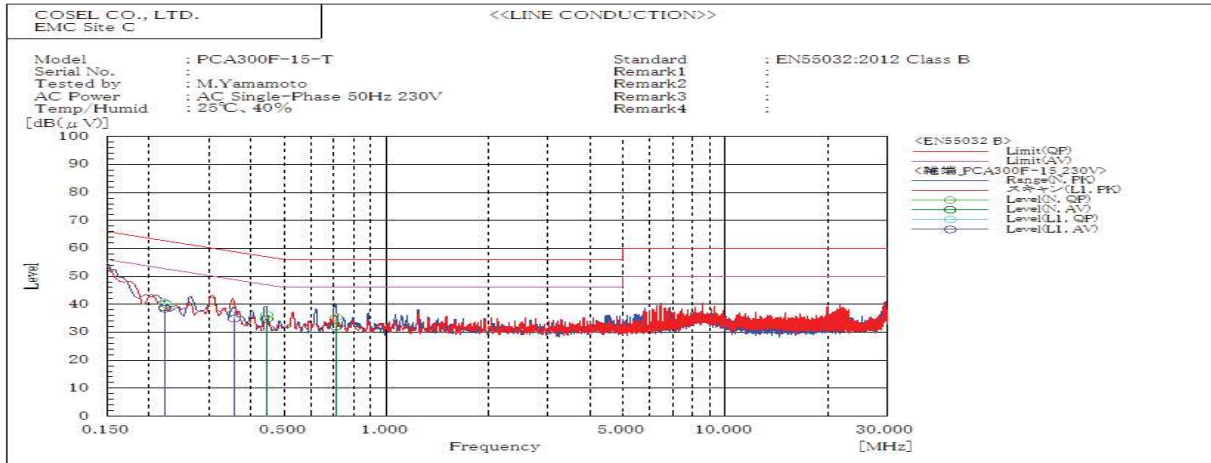


Frequency MHz	Line Phase	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/Fail	Remark
		QP	AV	QP	AV	QP	AV		
0.222	L1	40.6	38.5	62.7	52.7	22.1	14.2	Pass	
0.356	L1	37.2	34.8	58.8	48.8	21.6	14.0	Pass	
0.223	N	40.1	38.9	62.7	52.7	22.6	13.8	Pass	
0.444	N	36.3	34.8	57.0	47.0	20.7	12.2	Pass	
0.711	N	35.3	31.9	56.0	46.0	20.7	14.1	Pass	

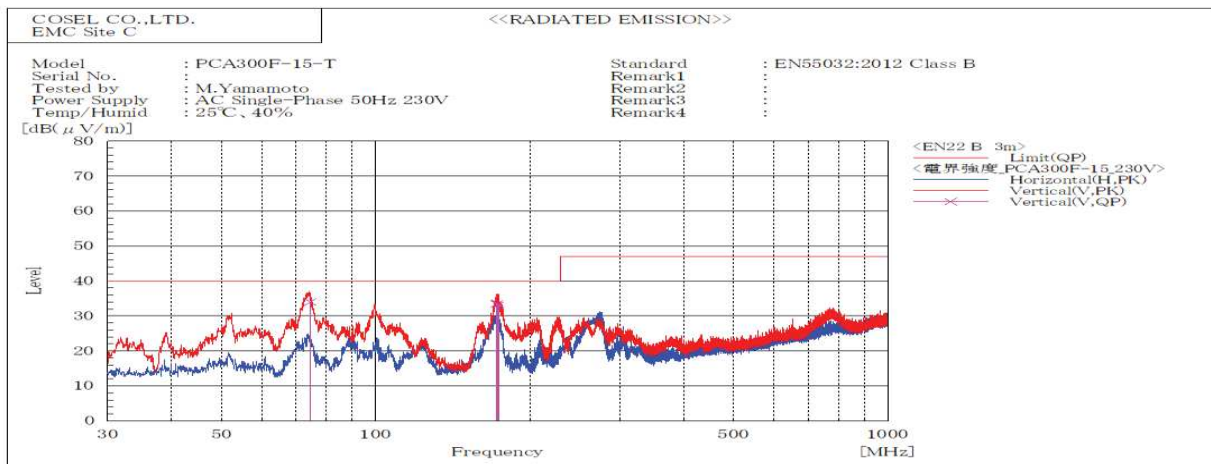


Frequency MHz	Polarization	Stability	Reading dB(μV/m)	Limit dB(μV/m)	Margin dB(μV/m)	Pass/Fail	Height cm	Angle deg	Remark
			QP	QP	QP				
74.676	V	Stable	33.9	40	6.1	Pass	100.2	14.9	
172.447	V	Stable	33.5	40	6.5	Pass	100.2	85.4	
172.307	V	Stable	33.5	40	6.5	Pass	100.4	83.7	
173.221	V	Stable	33.6	40	6.4	Pass	100.4	89.0	
172.678	V	Stable	33.6	40	6.4	Pass	100.4	87.5	
173.727	V	Stable	33.1	40	6.9	Pass	101.9	84.2	

DATA SHEET		Date	25-Mar-19
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	M.Yamamoto

### 1. Line conduction

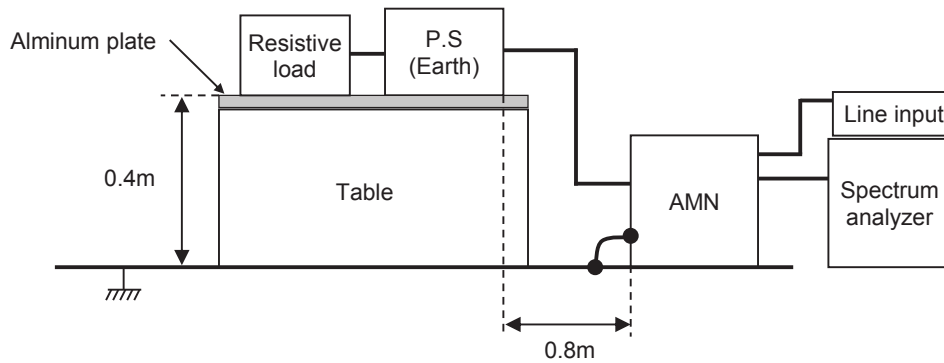

### 2. Radiated emission

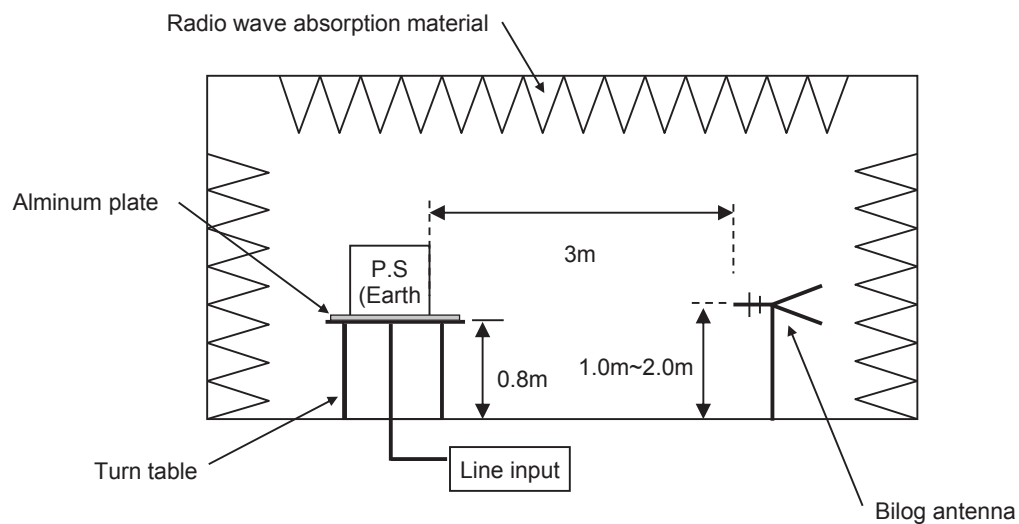

## Conditions

Test : EMI

Model Name : PCA300F

## ○Photographs of Test Set-Up

### 1.LINE CONDUCTION



### 2.RADIATED EMISSION

