



DATA SHEET		Date	06-Apr-18
Model	PCA600F-5	Temp.	25 degreeC
Test	EMI	Humid.	40 %RH
	Line conduction & Radiated emission	Tested by	D.Hayashi

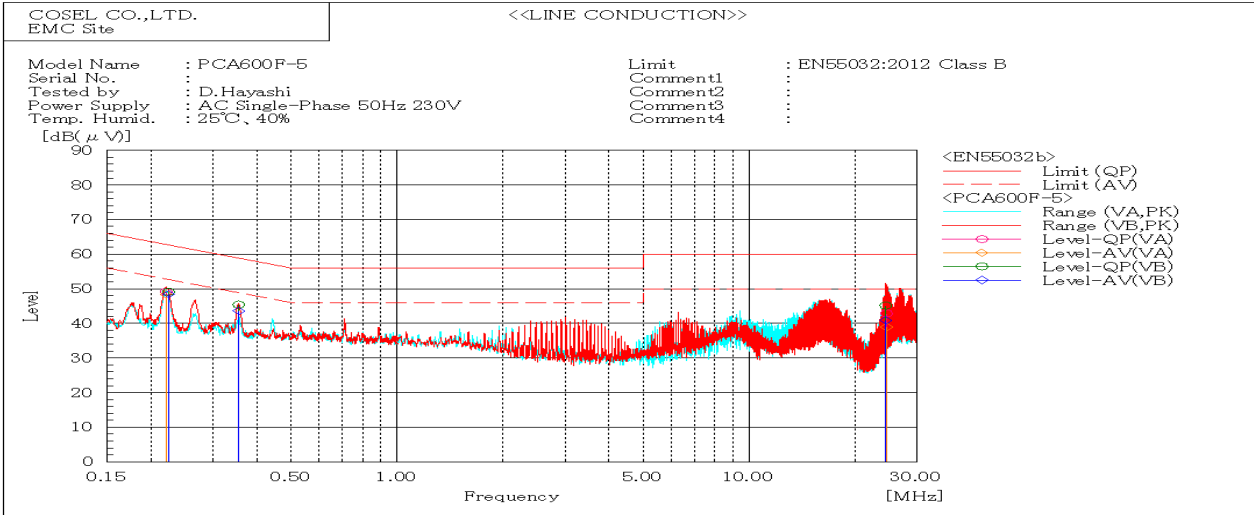


Frequency MHz	Line Phase	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/Fail	Remark
		QP	AV	QP	AV	QP	AV		
0.22057	VA	49.2	48.4	62.8	52.8	13.6	4.4	Pass	
0.22412	VB	49.1	48.4	62.7	52.7	13.6	4.3	Pass	
0.35483	VB	45.4	43.6	58.8	48.8	13.4	5.2	Pass	
24.51375	VB	45.2	40.9	60.0	50.0	14.8	9.1	Pass	
24.62145	VA	42.9	38.9	60.0	50.0	17.1	11.1	Pass	

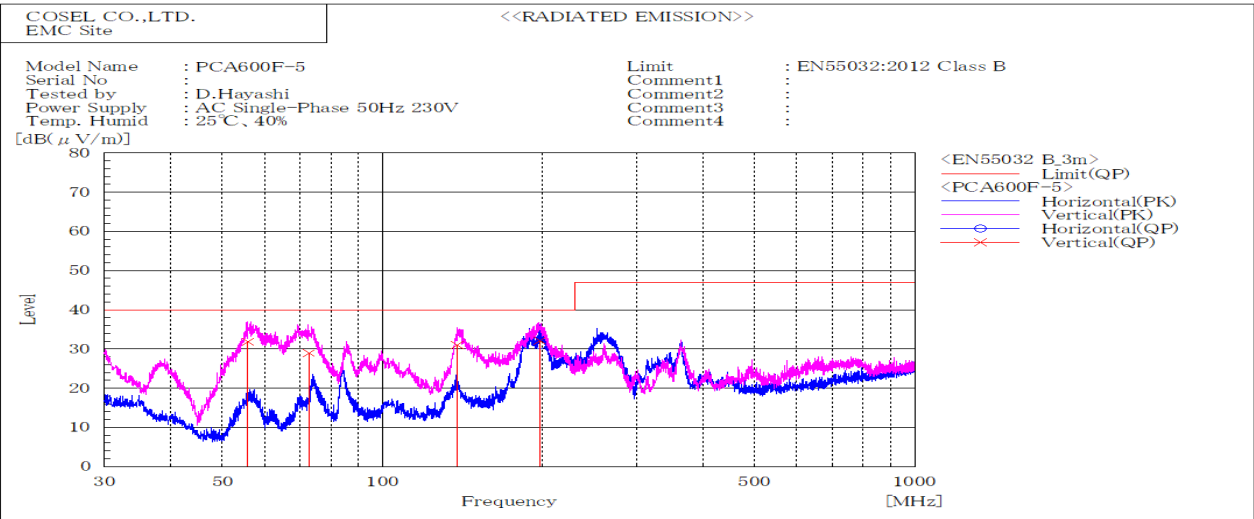


Frequency MHz	Polarization	Stability	Reading dB(μV)	Limit dB(μV/m)	Margin dB(μV/m)	Pass/Fail	Height cm	Angle deg	Remark
			QP	QP	QP				
55.827	V	Stable	31.8	40.0	8.2	Pass	100	348	
72.667	V	Stable	28.9	40.0	11.1	Pass	127	1	
138.232	V	Stable	31.0	40.0	9.0	Pass	106	205	
197.248	V	Stable	32.1	40.0	7.9	Pass	139	112	
197.518	H	Stable	31.0	40.0	9.0	Pass	159	71	

DATA SHEET		Date	06-Apr-18
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	D.Hayashi

1. Line conduction

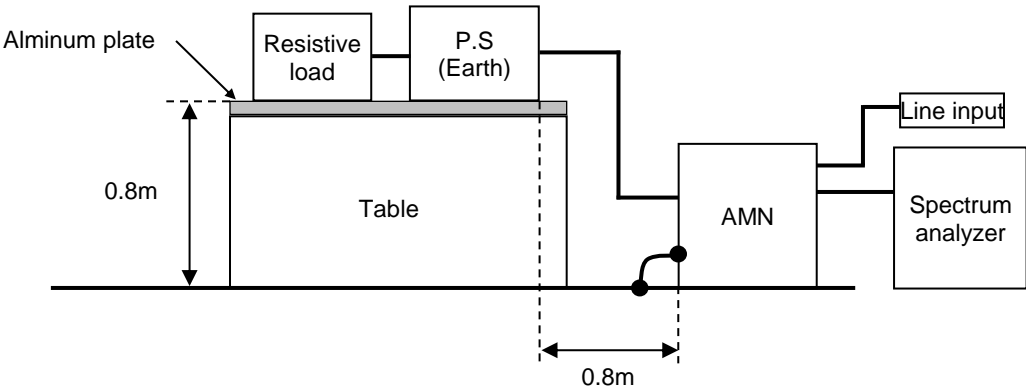

2. Radiated emission

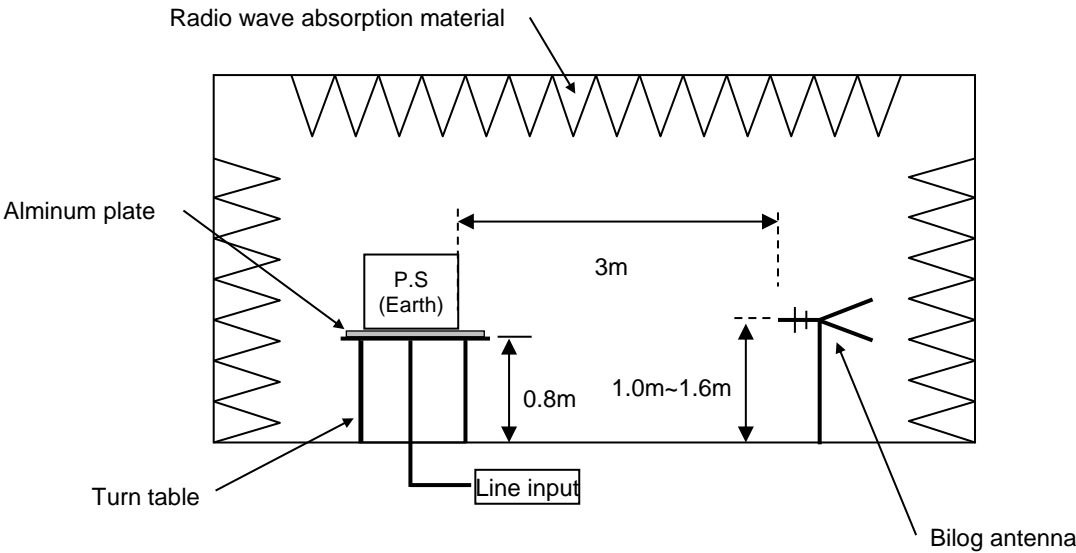

Conditions

Test : EMI
Model Name : PCA600F

0 Photographs of test set-up

1.LINE CONDUCTION



2.RADIATED EMISSION

