



DATA SHEET		Date	07-Jan-25
Model	PDA100F-15	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	K.Nishio

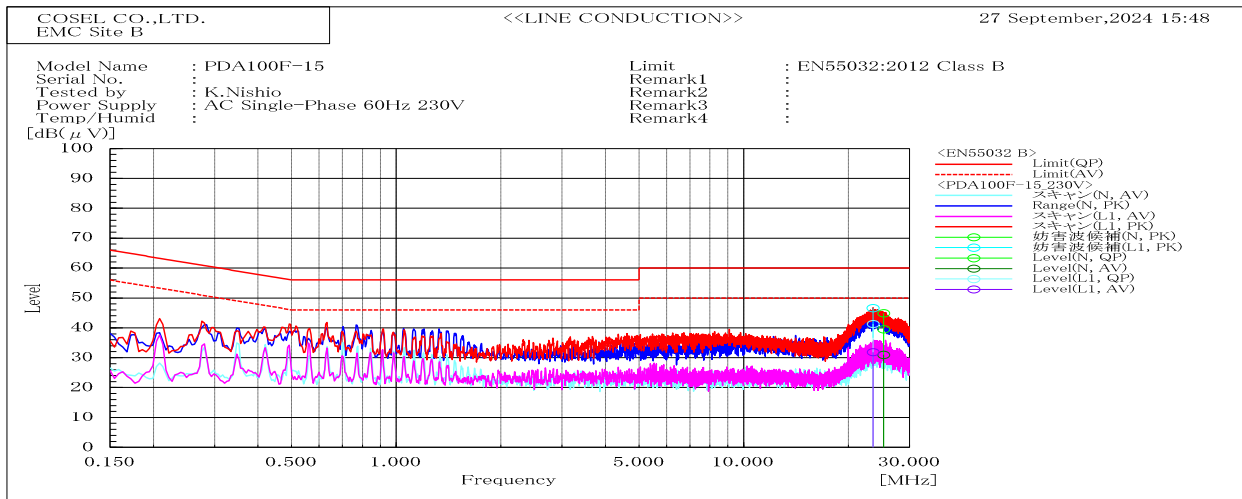


Frequency MHz	Line	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/Fail	Remark
		QP	AV	QP	AV	QP	AV		
23.594	L1	41.3	31.8	60	50	18.7	18.2	Pass	
25.287	N	39.5	30.9	60	50	20.5	19.1	Pass	

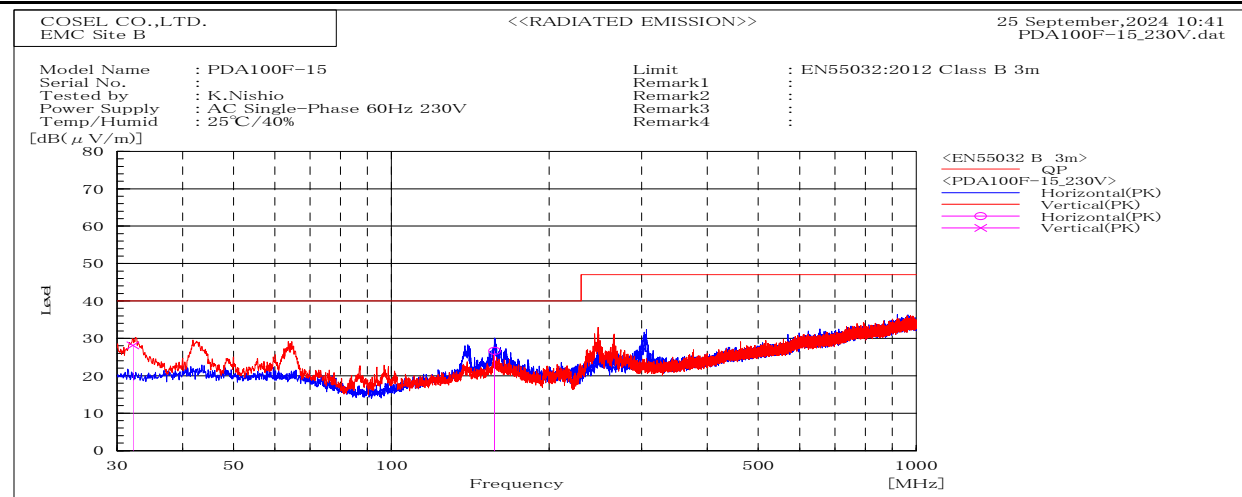


Frequency MHz	Polarization	Stability	Level dB(μV/m)	Limit dB(μV/m)	Margin dB	Pass/Fail	Height cm	Angle deg	Remark
			QP	QP	QP				
32.172	V	Stable	28.1	40	11.9	Pass	100	237.6	
157.236	H	Stable	26.7	40	13.3	Pass	186.5	241.4	

DATA SHEET		Date	07-Jan-25
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	K.Nishio

### 1. Line conduction

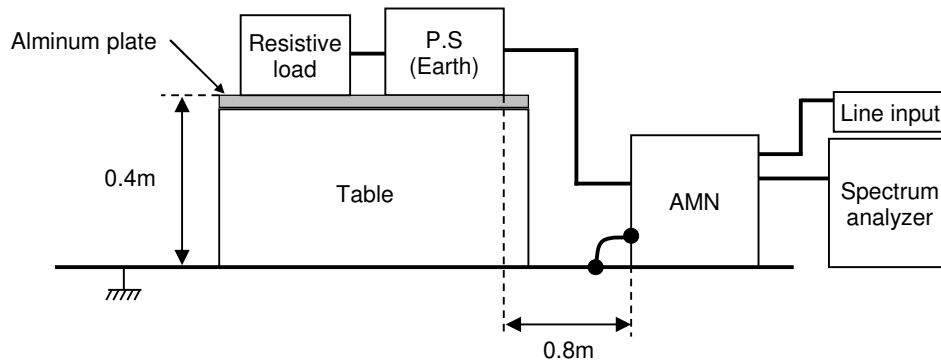



### 2. Radiated emission

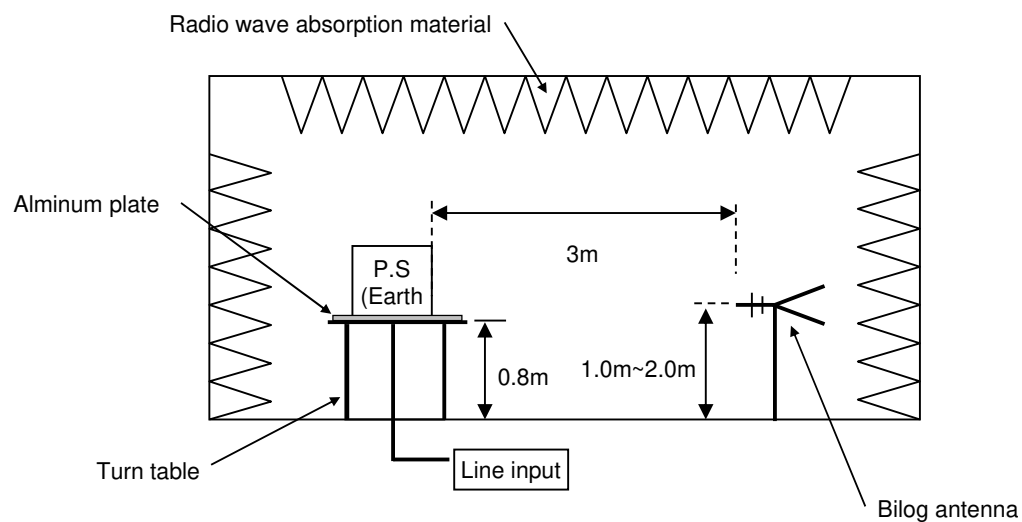

## Conditions

Test : EMI  
Model Nam: PDA100F-15

### 1.LINE CONDUCTION

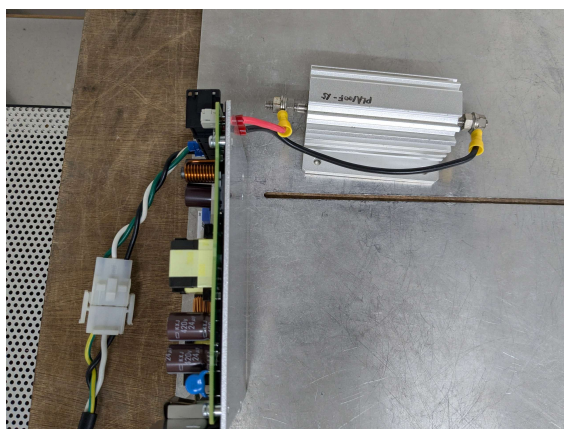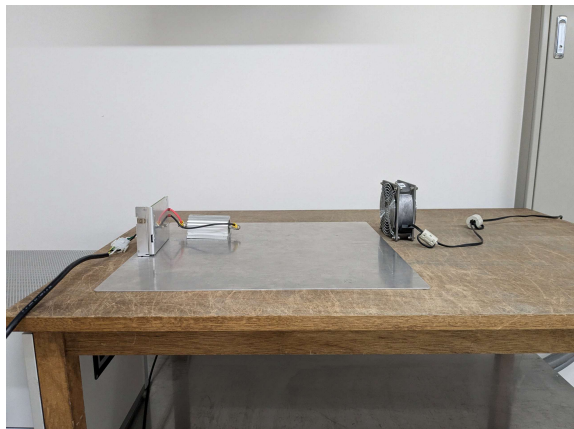

### 2.RADIATED EMISSION

