



DATA SHEET		Date	07-Jan-25
Model	PDA100F-24	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	K.Nishio

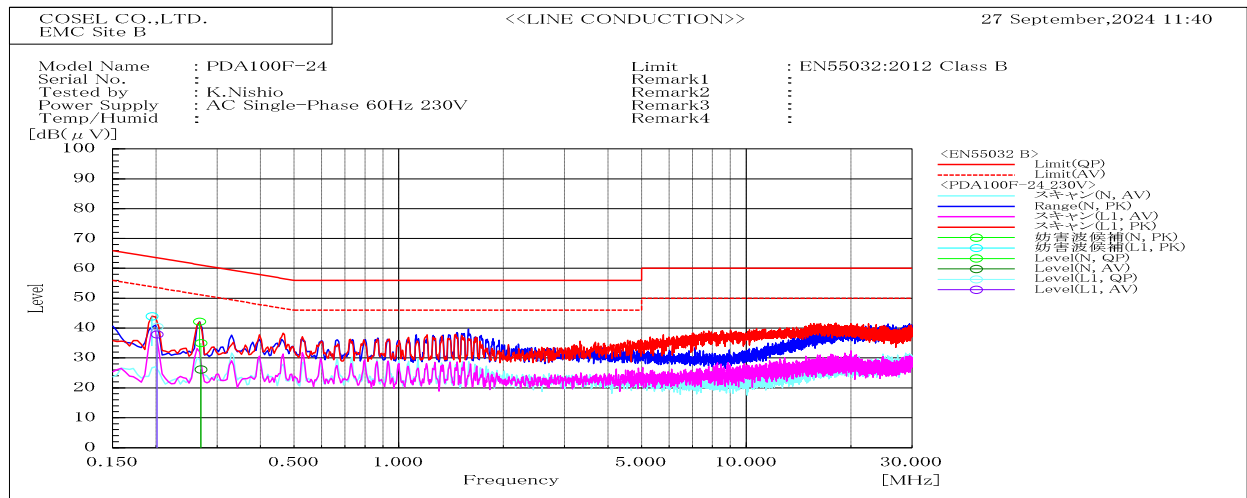


Frequency MHz	Line	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/Fail	Remark
		QP	AV	QP	AV	QP	AV		
0.202	L1	40.5	37.9	63.5	53.5	23	15.6	Pass	
0.27	N	35	26.1	61.1	51.1	26.1	25	Pass	

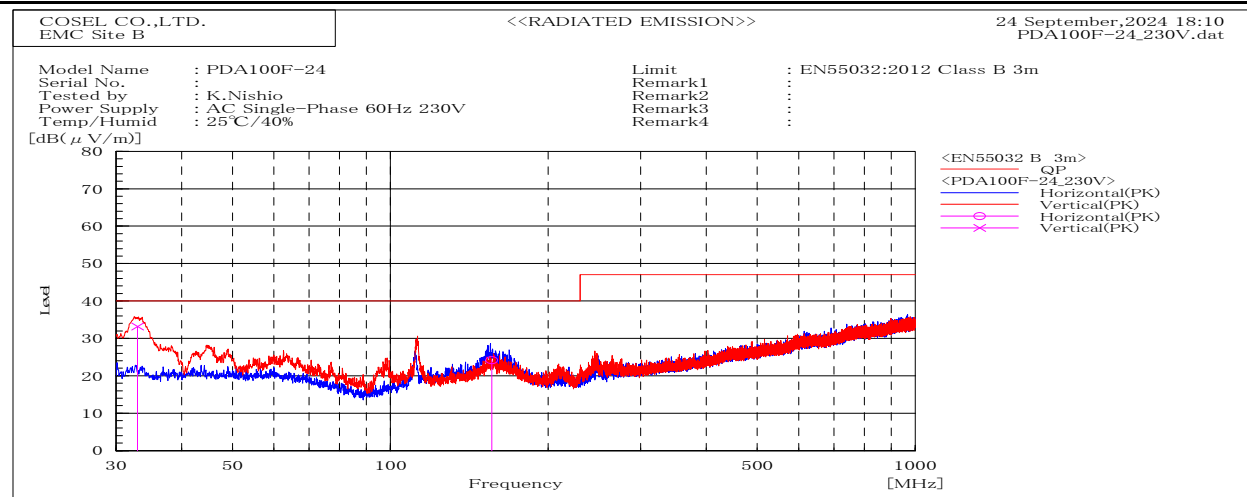


Frequency MHz	Polarization	Stability	Level dB(μV/m)		Limit dB(μV/m)	Margin dB	Pass/Fail	Height cm	Angle deg	Remark
			QP	QP						
32.987	V	Stable	33.2	40	6.8	Pass	100.2	203.9		
155.971	H	Stable	24.2	40	15.8	Pass	192.7	264.8		

DATA SHEET		Date	07-Jan-25
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	K.Nishio

1. Line conduction

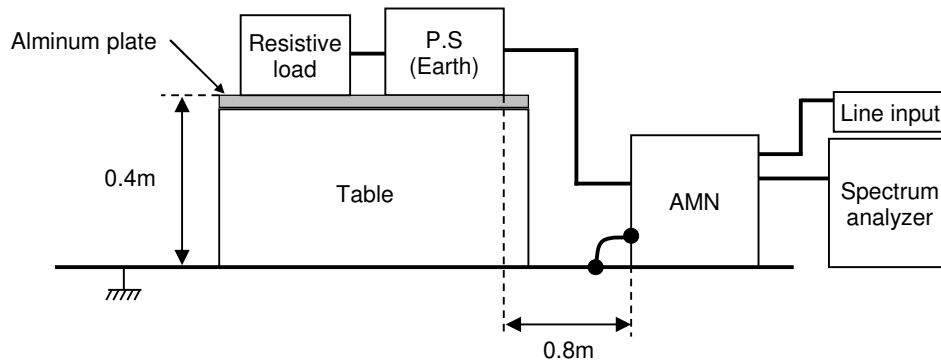



2. Radiated emission

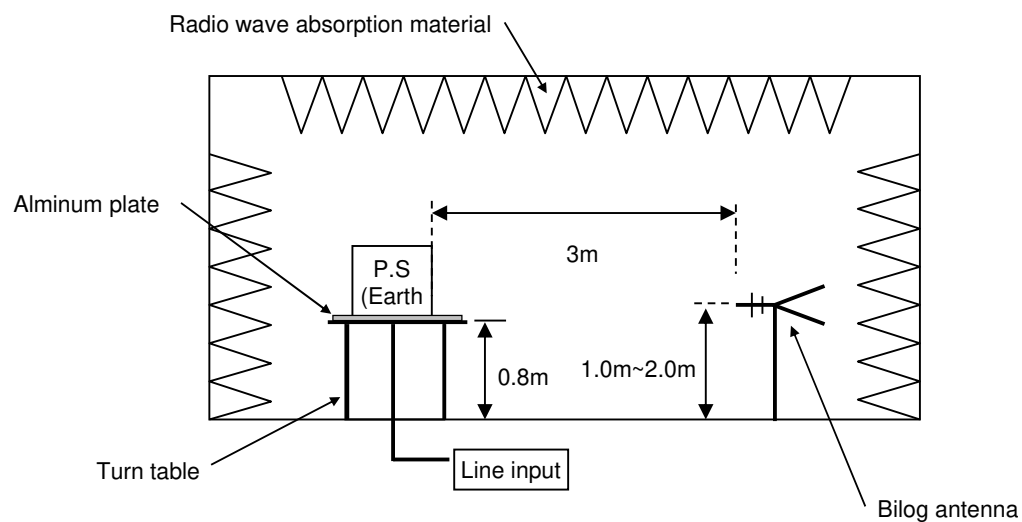

Conditions

Test : EMI
Model Nam: PDA100F-24

1.LINE CONDUCTION

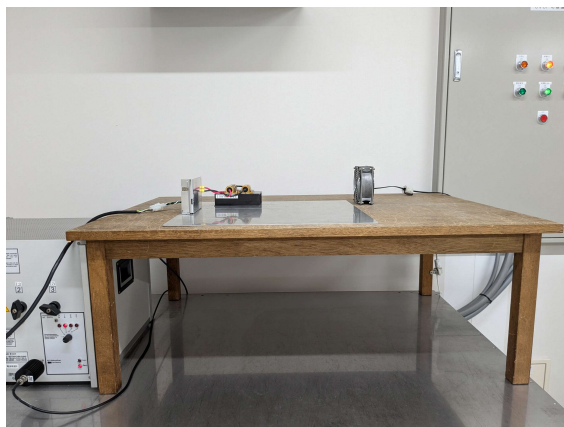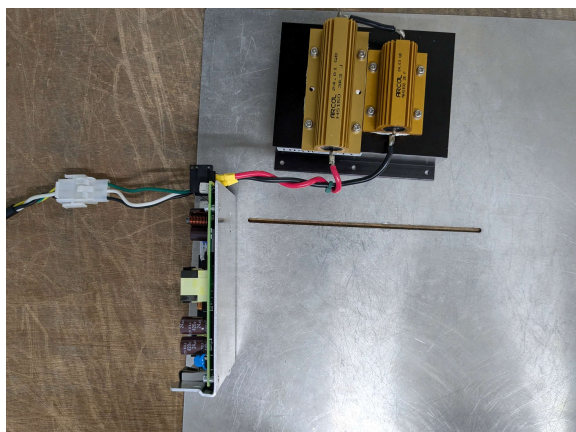

2.RADIATED EMISSION

