



DATA SHEET

Model		PDA100F-5	Date	07-Jan-25
Test		EMI Line conduction & Radiated emission	Temp.	25 degreeC
			Humid.	40 %RH
			Tested by	K.Nishio

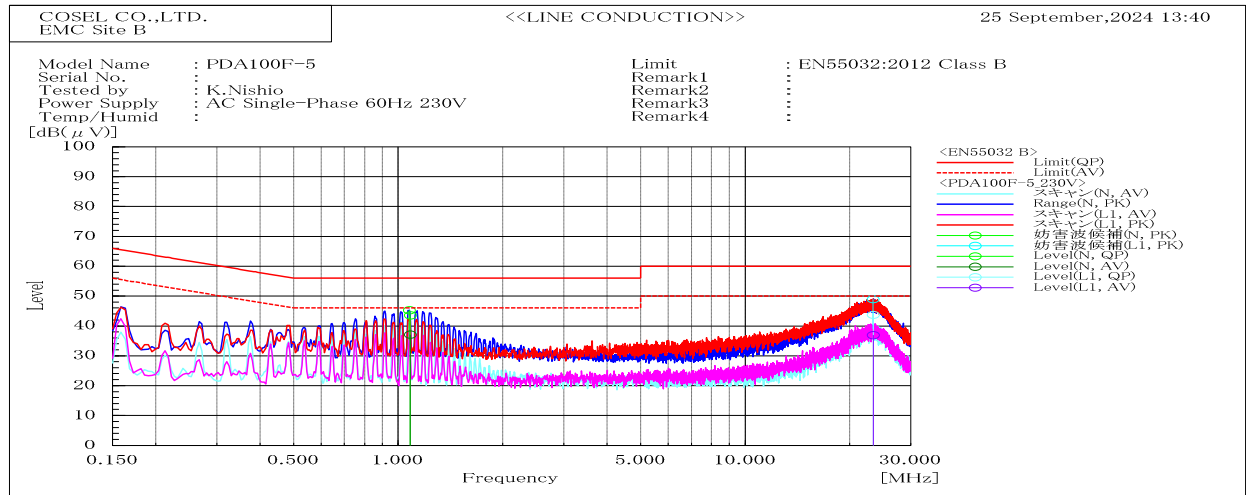


Frequency MHz	Line	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/Fail	Remark
		QP	AV	QP	AV	QP	AV		
1.083	N	43.6	37.1	56	46	12.4	8.9	Pass	
23.383	L1	43.7	36.9	60	50	16.3	13.1	Pass	

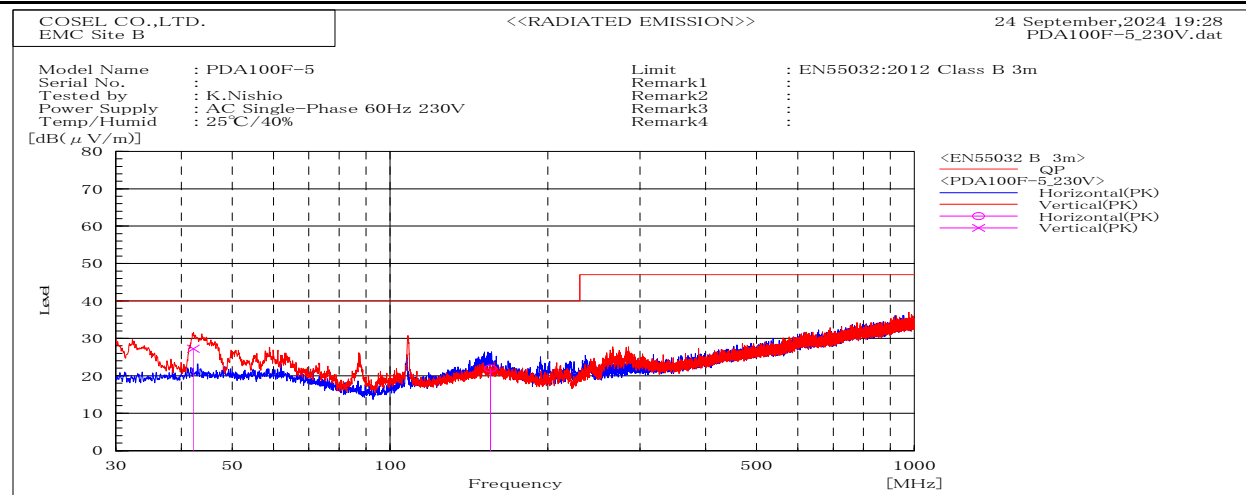


Frequency MHz	Polarization	Stability	Level dB(μV/m)		Limit dB(μV/m)	Margin dB	Pass/Fail	Height cm	Angle deg	Remark
			QP	QP		QP				
42.169	V	Stable	27.2	40	12.8	Pass	100	0		
155.436	H	Stable	22	40	18	Pass	199.7	99.1		

DATA SHEET		Date	07-Jan-25
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	K.Nishio

1. Line conduction


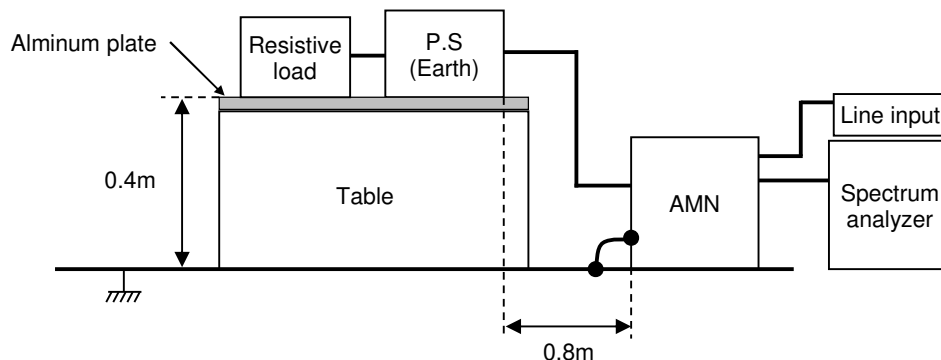


2. Radiated emission

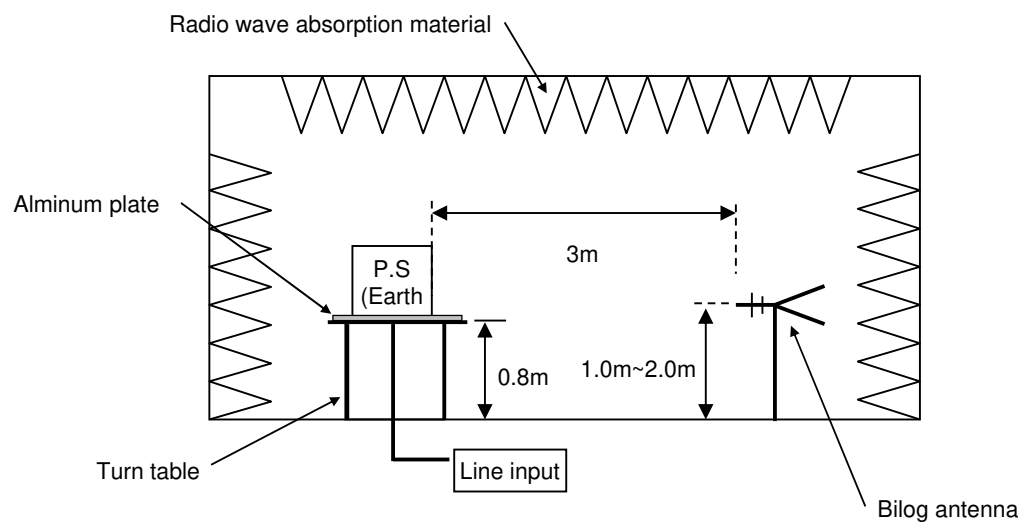

Conditions

Test : EMI
Model Nam : PDA100F-5

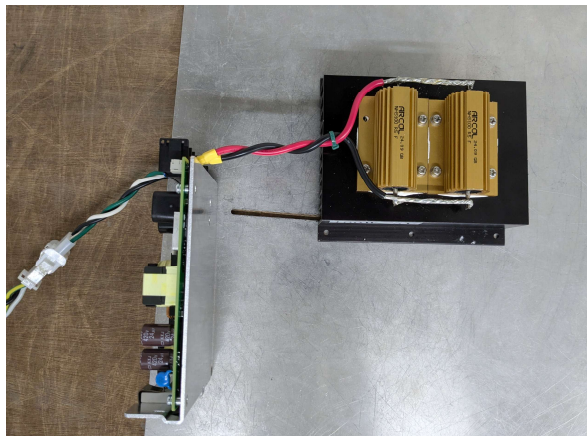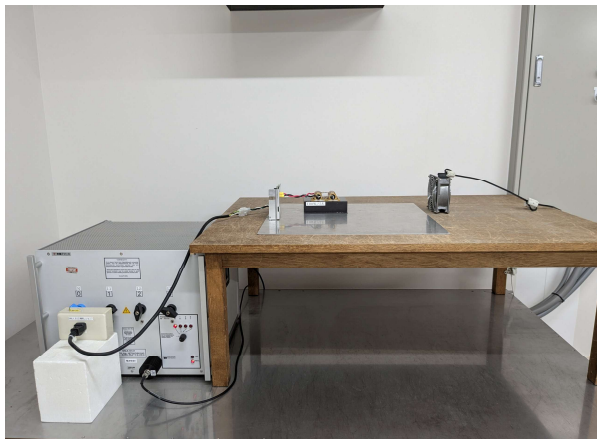1.LINE CONDUCTION**2.RADIATED EMISSION**