



DATA SHEET		Date	07-Jan-25
Model	PDA150F-12	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	K.Nishio

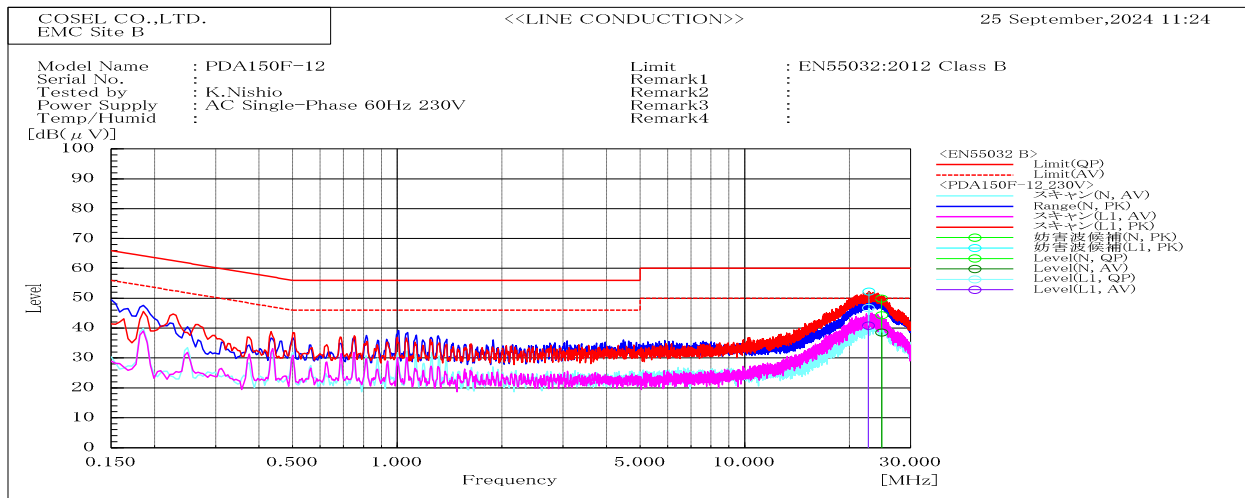


Frequency MHz	Line	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/Fail	Remark
		QP	AV	QP	AV	QP	AV		
22.725	L1	46.7	40.9	60	50	13.3	9.1	Pass	
24.789	N	44.4	38.5	60	50	15.6	11.5	Pass	

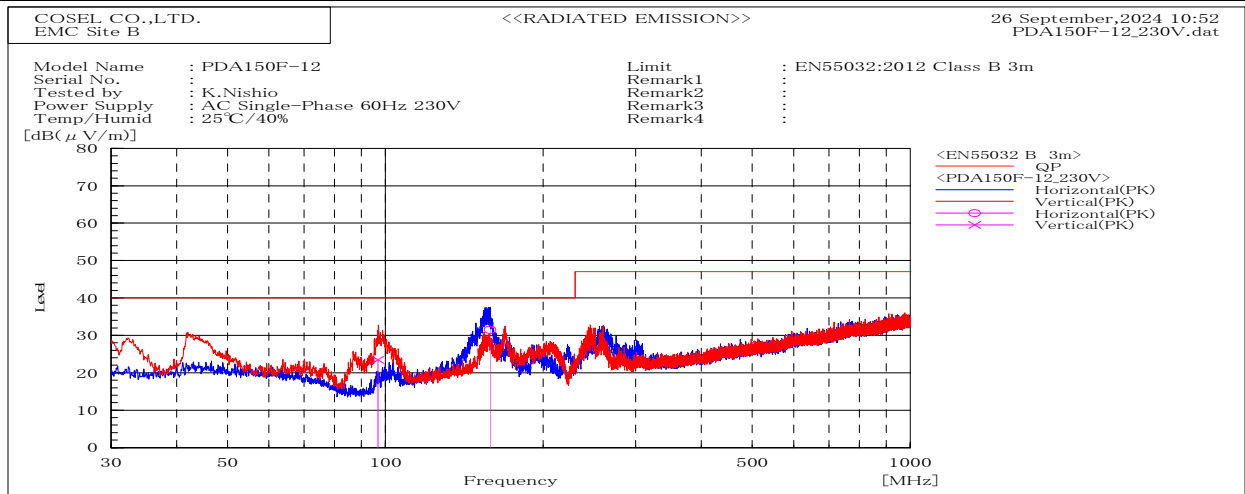


Frequency MHz	Polarization	Stability	Level dB(μV/m)		Limit dB(μV/m)	Margin dB	Pass/Fail	Height cm	Angle deg	Remark
			QP	QP						
158.289	H	Stable	31.5	40	8.5	Pass	188.1	0		
96.81	V	Stable	23.5	40	16.5	Pass	117.7	0		

DATA SHEET		Date	07-Jan-25
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	K.Nishio

1. Line conduction

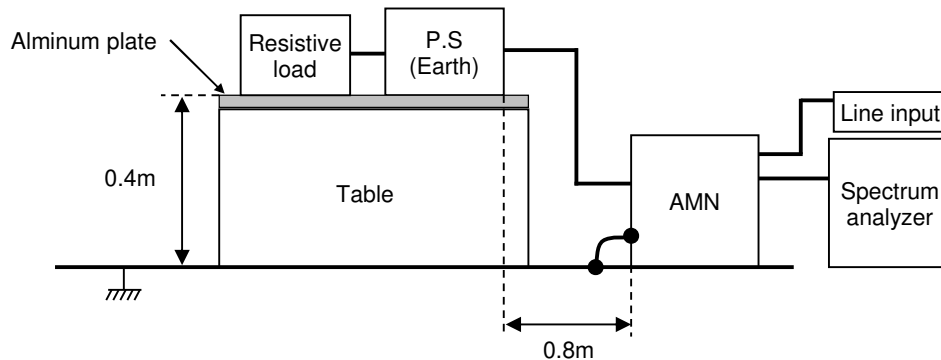


2. Radiated emission

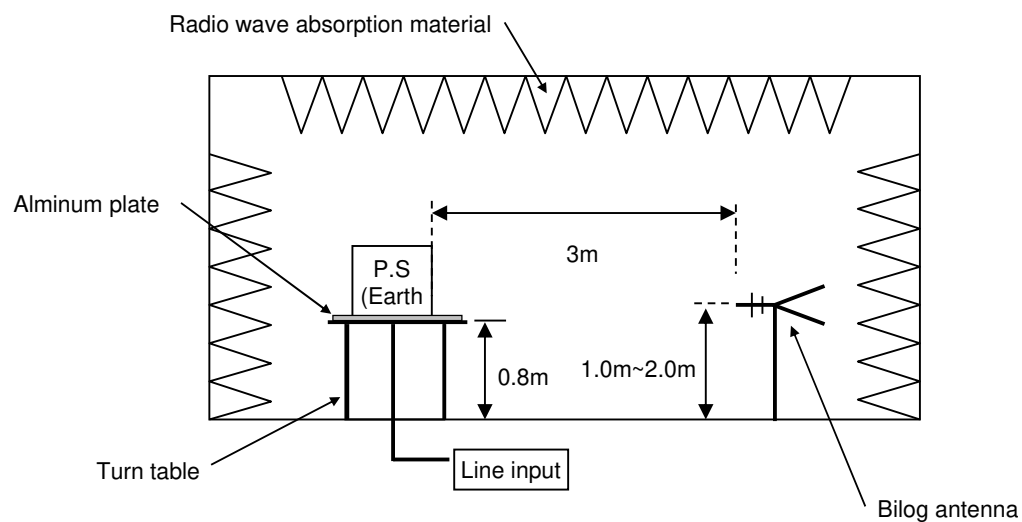

Conditions

Test : EMI
Model Nam: PDA150F-12

1.LINE CONDUCTION

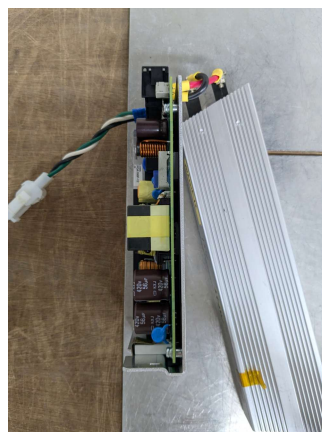

2.RADIATED EMISSION

