



DATA SHEET		Date	07-Jan-25
Model	PDA150F-15	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	K.Nishio

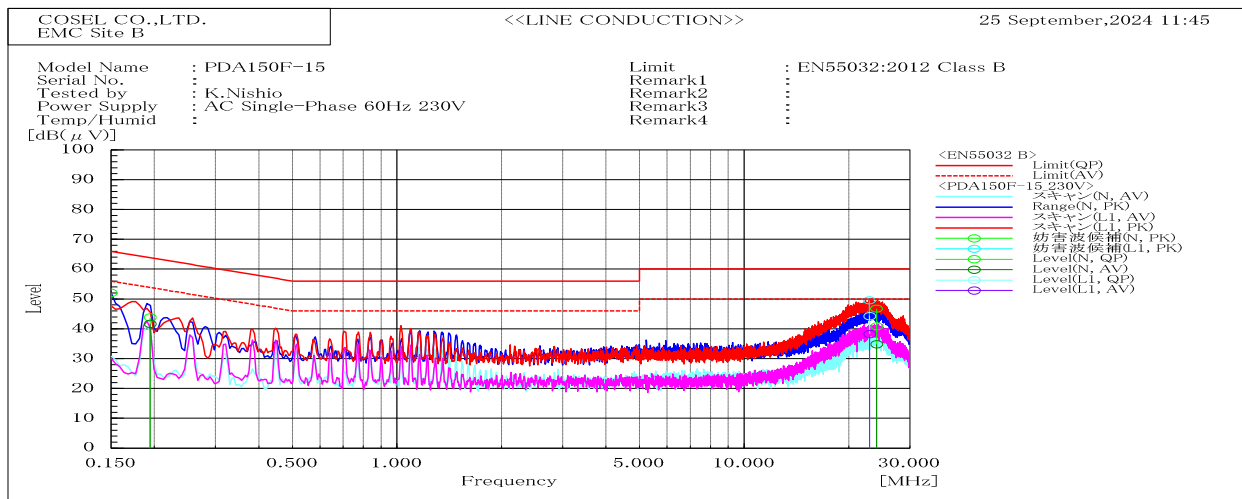


Frequency MHz	Line	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/Fail	Remark
		QP	AV	QP	AV	QP	AV		
0.195	N	43.8	41.7	63.8	53.8	20	12.1	Pass	
24.073	N	40.9	34.8	60	50	19.1	15.2	Pass	
22.977	L1	44.2	38.2	60	50	15.8	11.8	Pass	

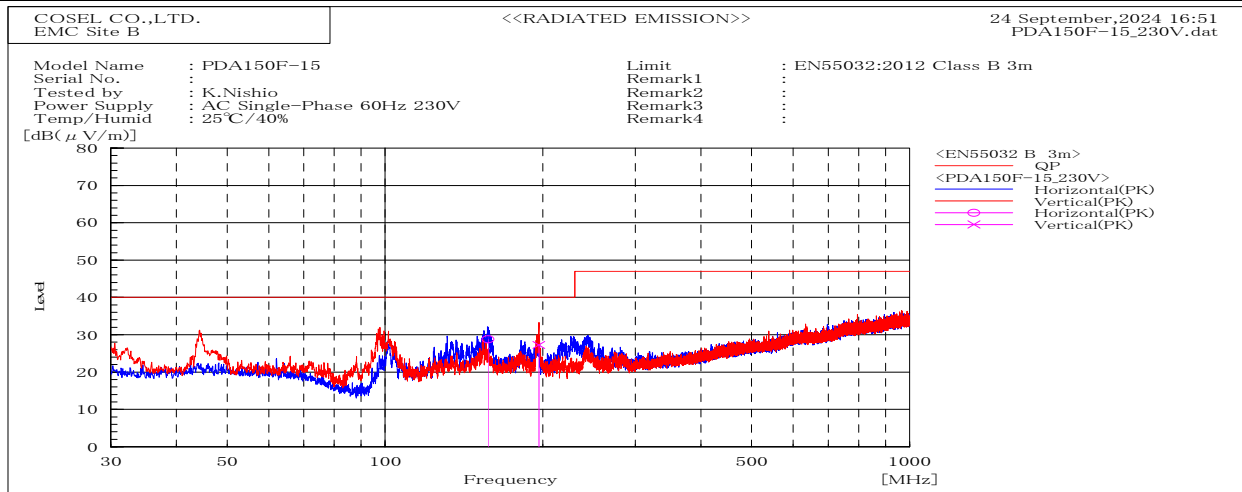


Frequency MHz	Polarization	Stability	Level dB(μV/m)	Limit dB(μV/m)	Margin dB	Pass/Fail	Height cm	Angle deg	Remark
			QP	QP	QP				
196.369	V	Stable	27.3	40	12.7	Pass	100	3.8	
157.139	H	Stable	28.8	40	11.2	Pass	180.3	89.5	

DATA SHEET		Date	07-Jan-25
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	K.Nishio

1. Line conduction

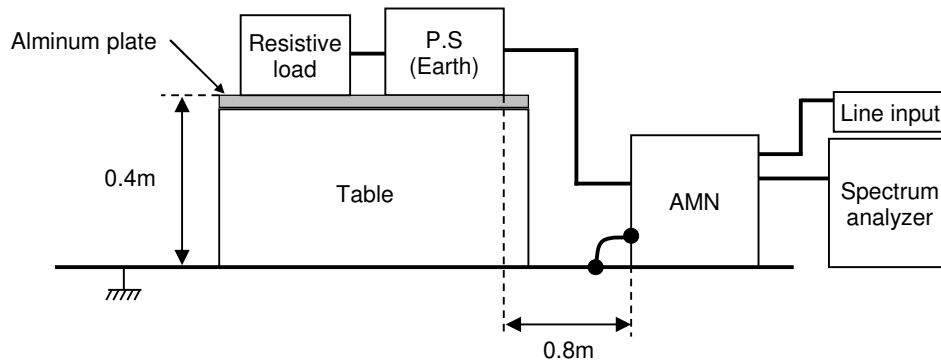



2. Radiated emission

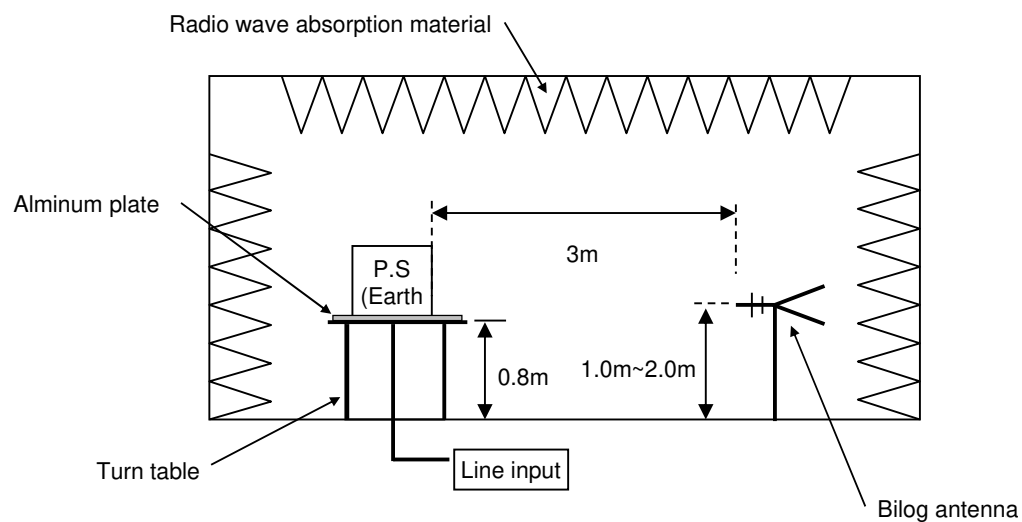

Conditions

Test : EMI
Model Nam: PDA150F-15

1.LINE CONDUCTION

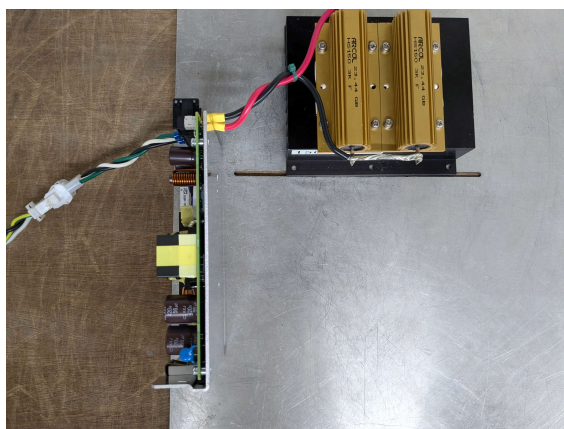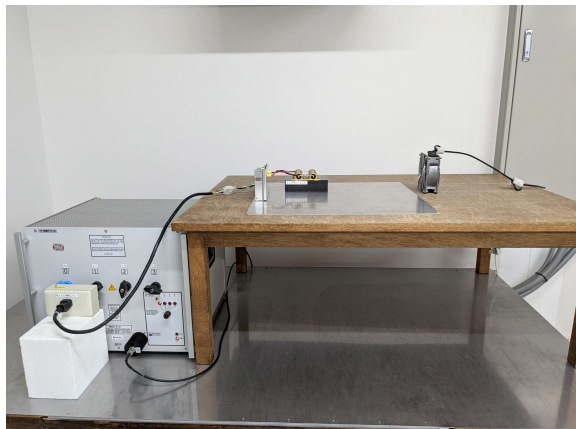

2.RADIATED EMISSION

