



DATA SHEET		Date	07-Jan-25
Model	PDA150F-5	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	K.Nishio

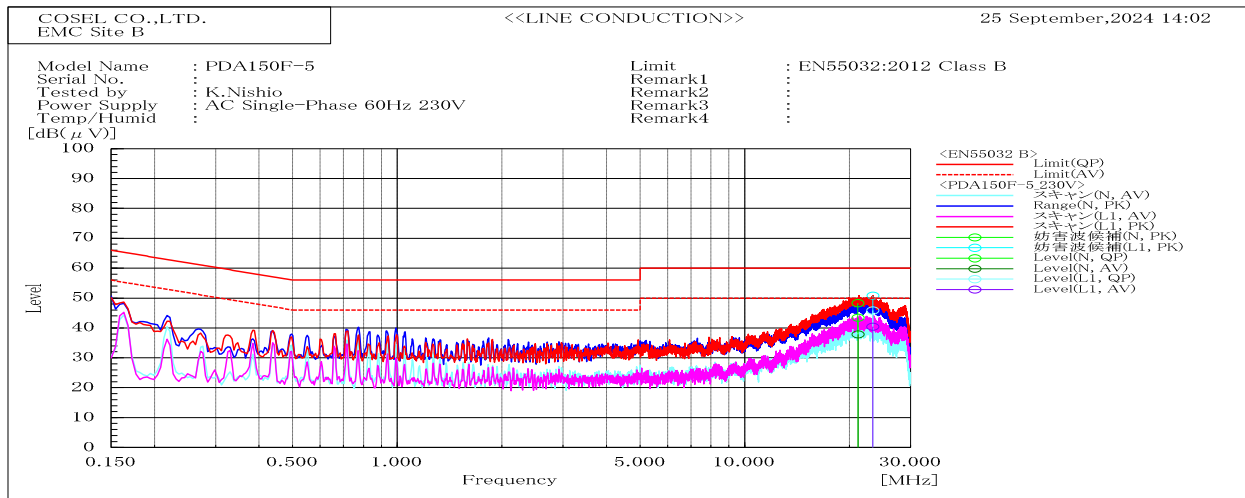


Frequency	Line	Level		Limit		Margin		Pass/Fail	Remark
MHz		dB(μV)		dB(μV)		dB			
		QP	AV	QP	AV	QP	AV		
23.369	L1	45.9	40.4	60	50	14.1	9.6	Pass	
21.181	N	43.4	37.9	60	50	16.6	12.1	Pass	

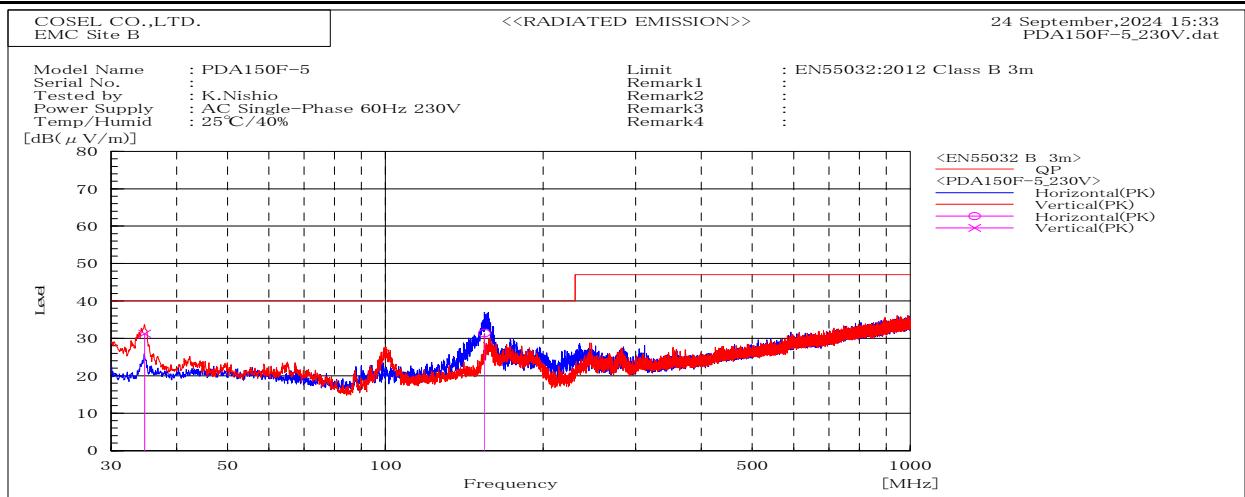


Frequency	Polarization	Stability	Level	Limit	Margin	Pass/Fail	Height	Angle	Remark
MHz			dB(μV/m)	dB(μV/m)	dB				
			QP	QP	QP		cm	deg	
34.777	V	Stable	31.3	40	8.7	Pass	100.2	306.9	
154.312	H	Stable	31.4	40	8.6	Pass	190.3	351.7	

DATA SHEET		Date	07-Jan-25
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	K.Nishio

1. Line conduction

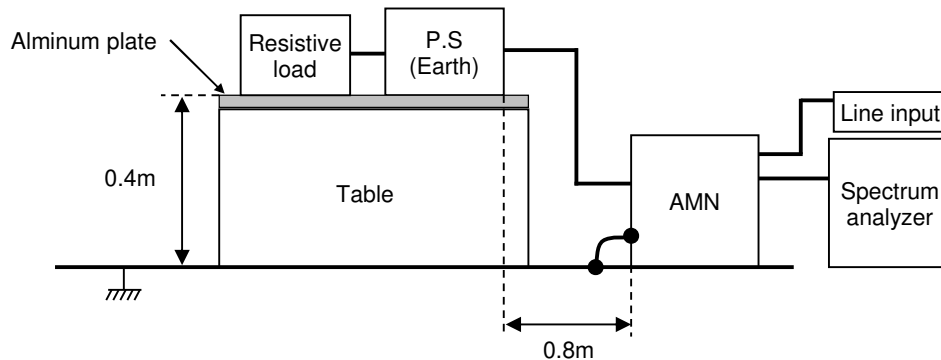



2. Radiated emission

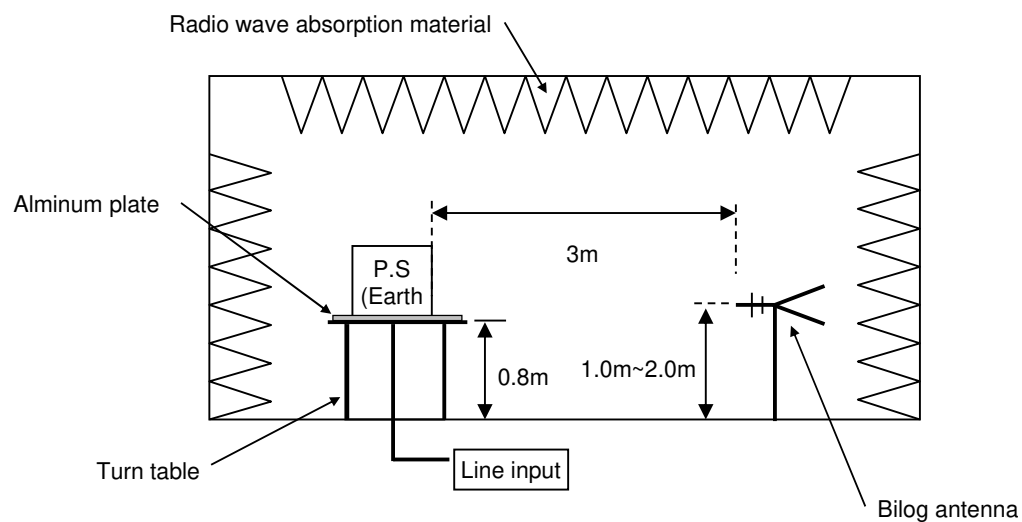

Conditions

Test : EMI
Model Nam : PDA150F-5

1.LINE CONDUCTION

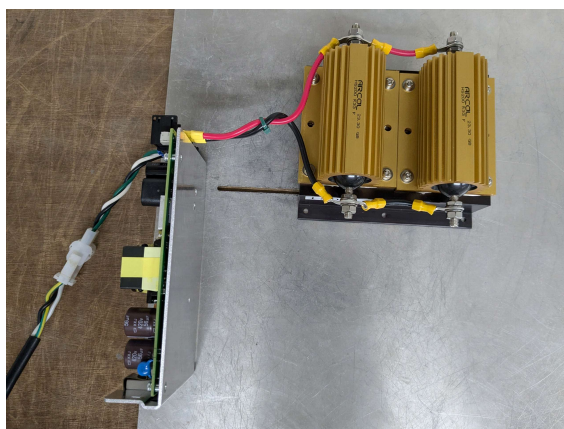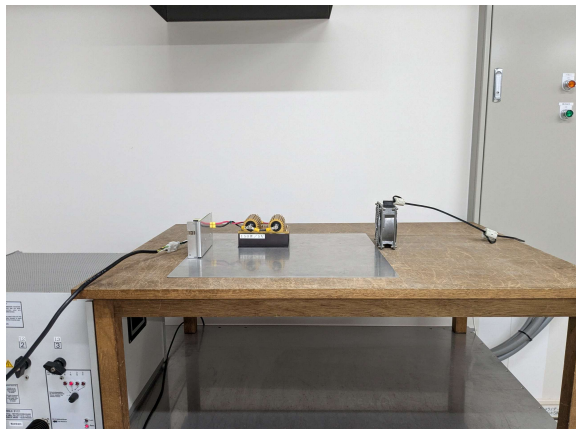

2.RADIATED EMISSION

