



DATA SHEET		Date	19-Jun-25
Model	PDA300F-12	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	K.Nishio

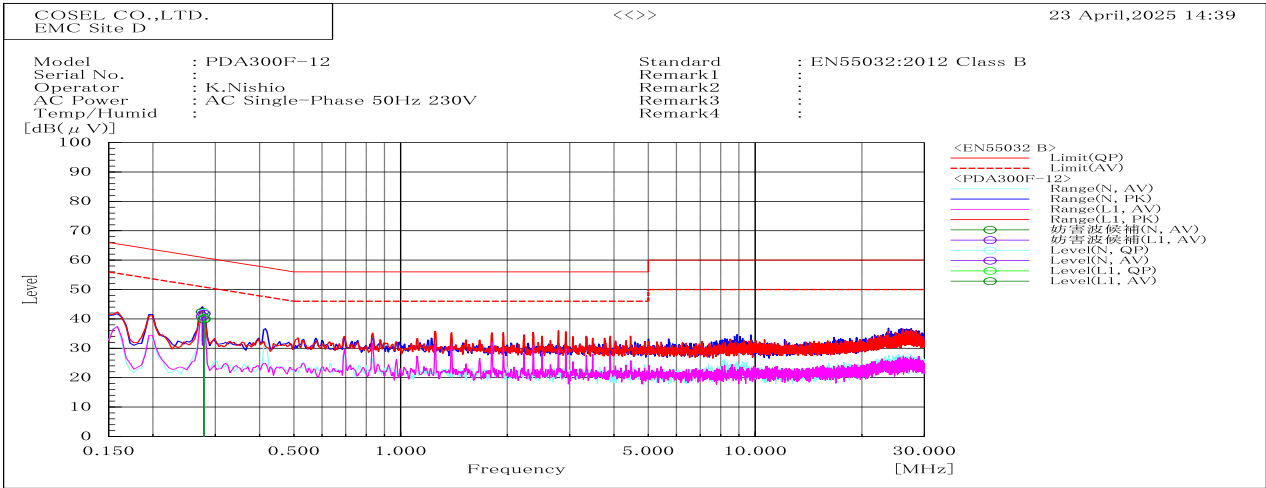


Frequency MHz	Line	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/Fail	Remark
		QP	AV	QP	AV	QP	AV		
0.279	N	42.1	41.7	60.9	50.9	18.8	9.2	Pass	
0.279	L1	40.2	39.8	60.9	50.9	20.7	11.1	Pass	

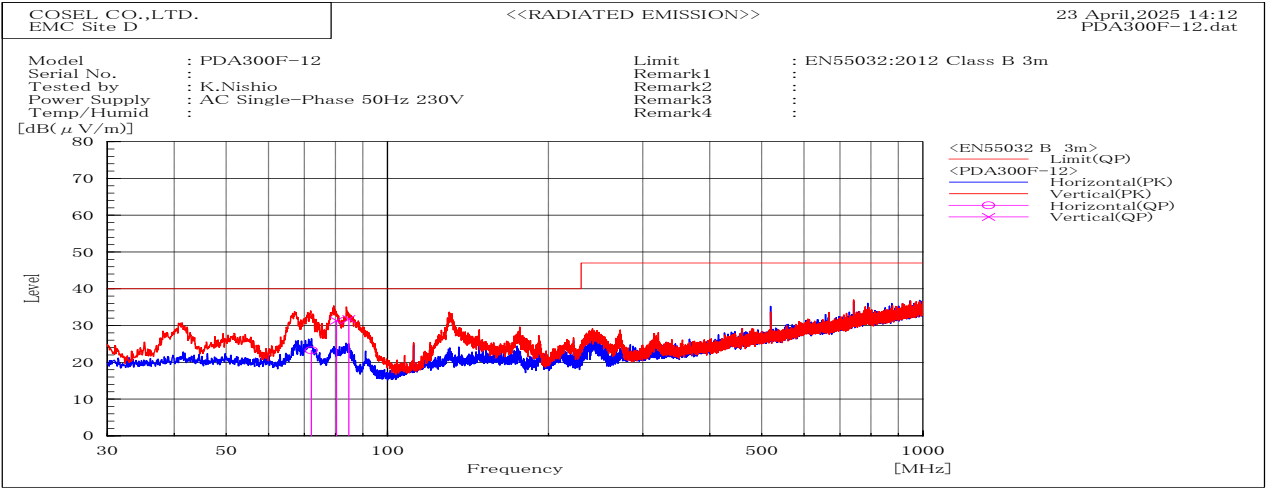


Frequency MHz	Polarization	Stability	Level dB(uV/m)	Limit dB(uV/m)	Margin dB	Pass/Fail	Height cm	Angle deg	Remark
			QP	QP	QP				
80.325	V	Stable	31.3	40	8.7	Pass	100.2	273.6	
84.763	V	Stable	31.8	40	8.2	Pass	126.6	327.4	
72.091	H	Stable	23.3	40	16.7	Pass	200	209	

DATA SHEET		Date	19-Jun-25
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	K.Nishio

1. Line conduction

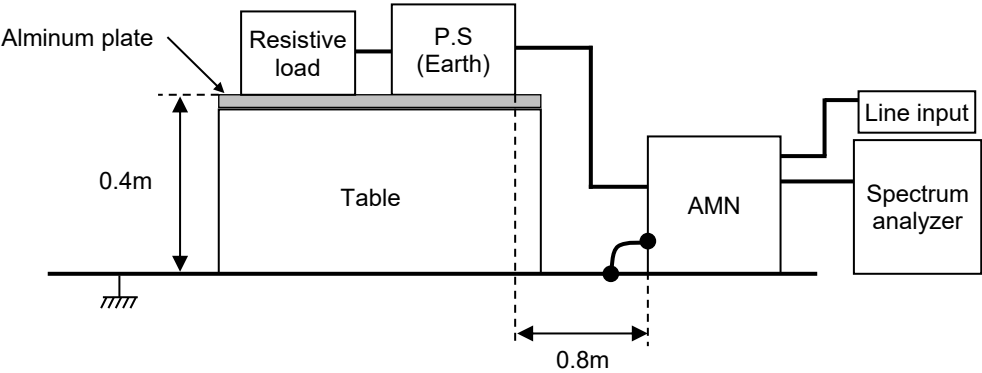

2. Radiated emission

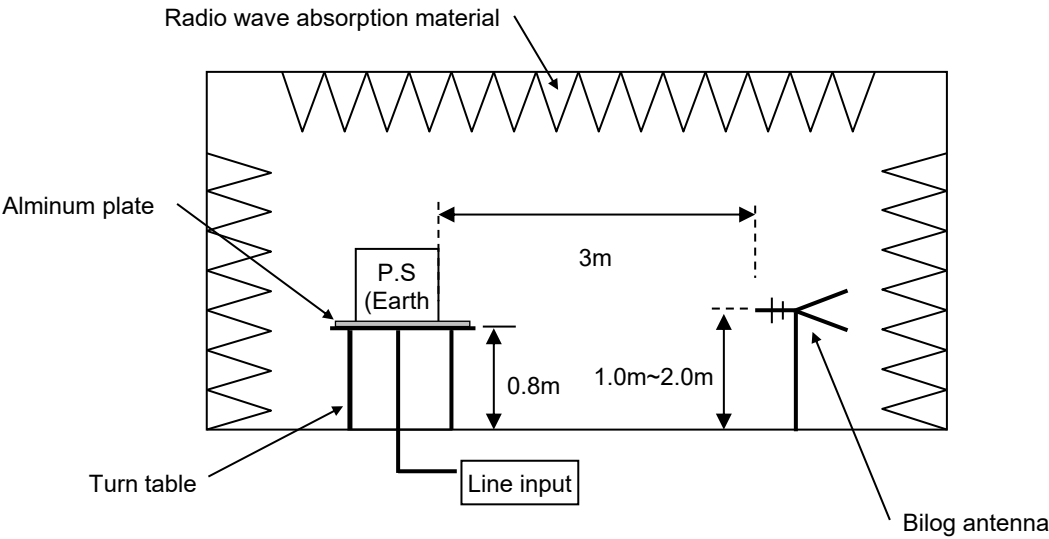

Conditions

Test : EMI
Model Nam: PDA300F-12

1.LINE CONDUCTION



2.RADIATED EMISSION

