



DATA SHEET		Date	19-Jun-25
Model	PDA300F-15	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	K.Nishio

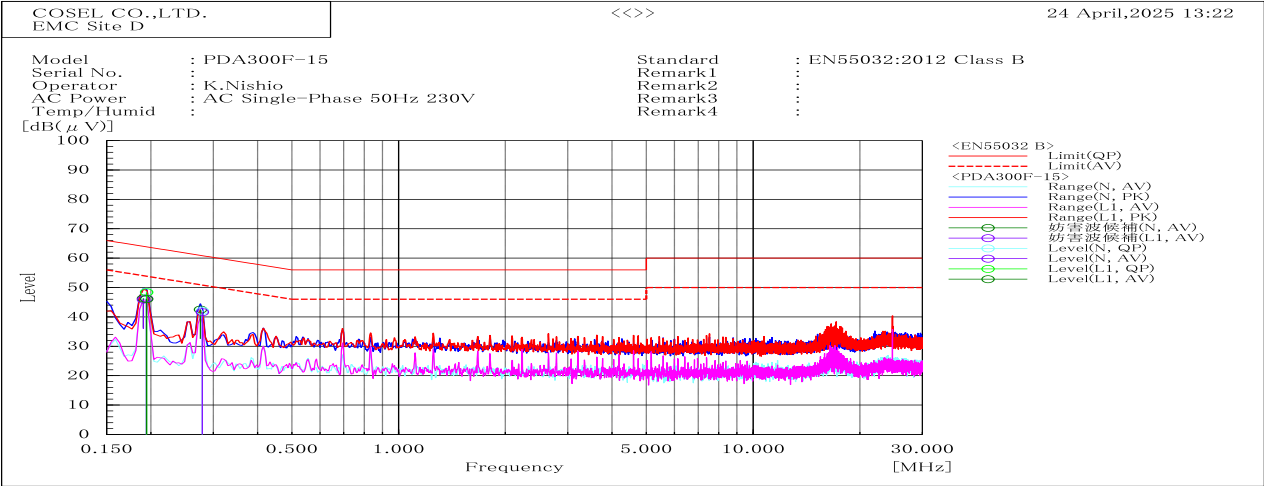


Frequency	Line	Level		Limit		Margin		Pass/Fail	Remark
MHz		dB(μV)		dB(μV)		dB			
		QP	AV	QP	AV	QP	AV		
0.195	L1	48.4	46.1	63.8	53.8	15.4	7.7	Pass	
0.194	N	48.6	46.3	63.8	53.8	15.2	7.5	Pass	
0.279	N	42.1	41.6	60.8	50.8	18.7	9.2	Pass	

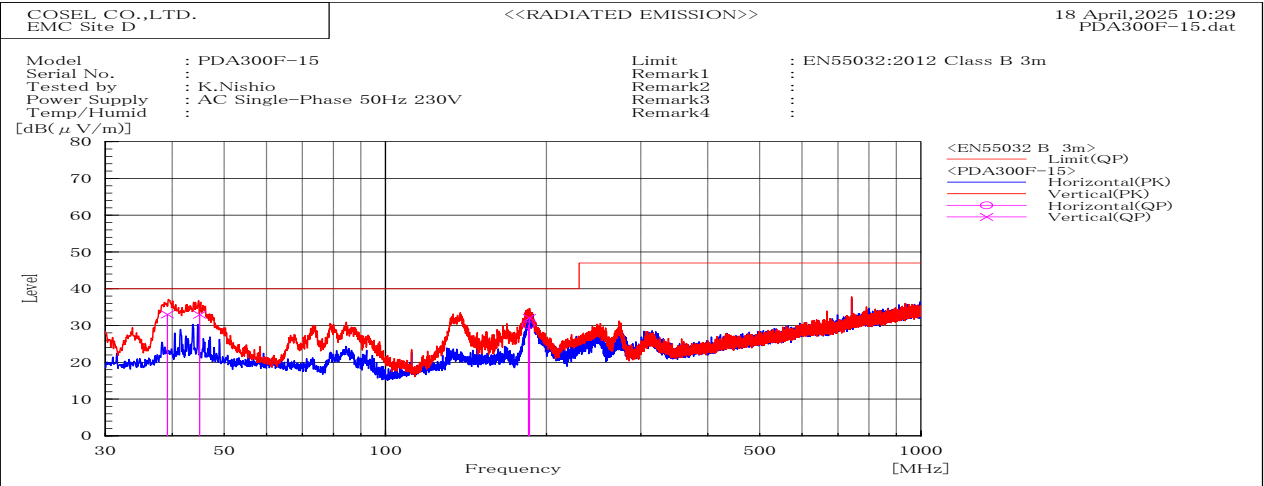


Frequency MHz	Polarization	Stability	Level	Limit	Margin	Pass/Fail	Height cm	Angle deg	Remark
			dB(uV/m) QP	dB(uV/m) QP	dB QP				
39.183	V	Stable	33	40	7	Pass	101.5	200.3	
44.984	V	Stable	33	40	7	Pass	100	56.5	
185.814	V	Stable	32.1	40	7.9	Pass	100	227.6	
184.972	H	Stable	30.1	40	9.9	Pass	185.9	224.7	

DATA SHEET		Date	19-Jun-25
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	K.Nishio

1. Line conduction

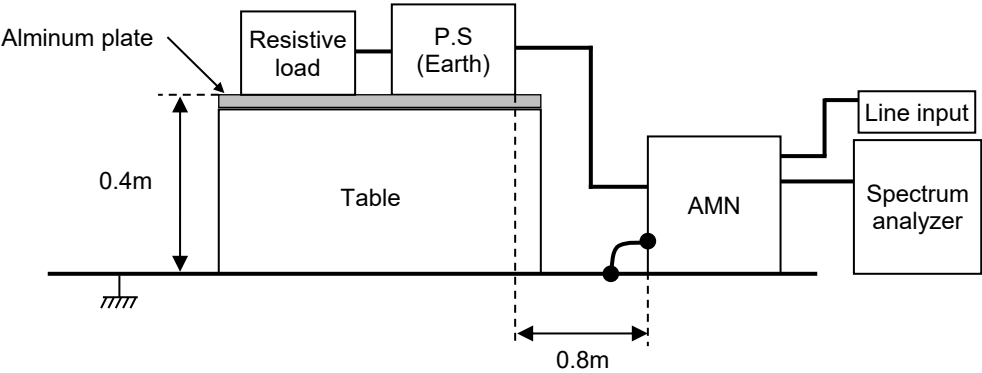

2. Radiated emission

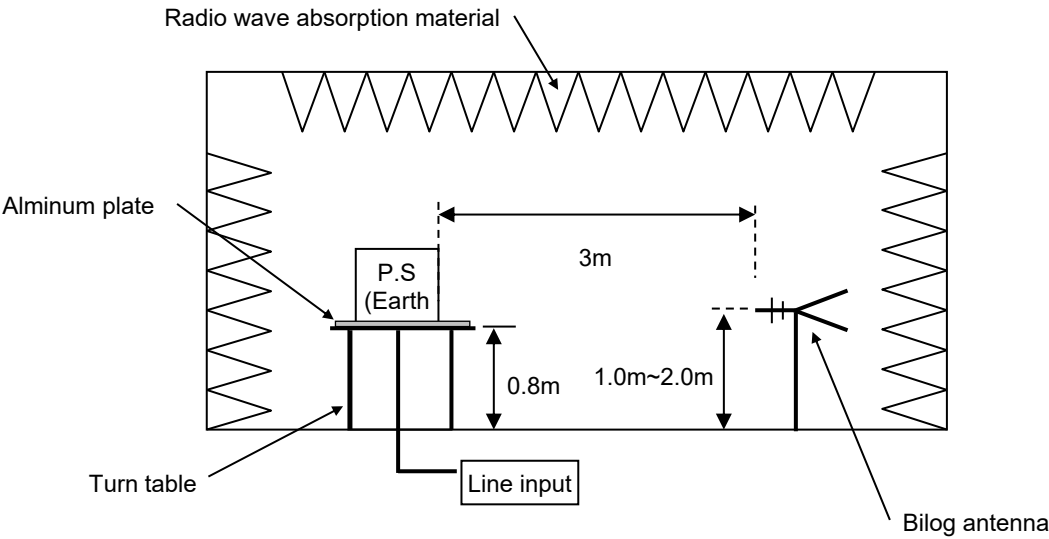

Conditions

Test : EMI
Model Nam: PDA300F-15

1.LINE CONDUCTION



2.RADIATED EMISSION

