



DATA SHEET		Date	02-Dec-23
Model	PDA30F-12	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	K.HIROSE

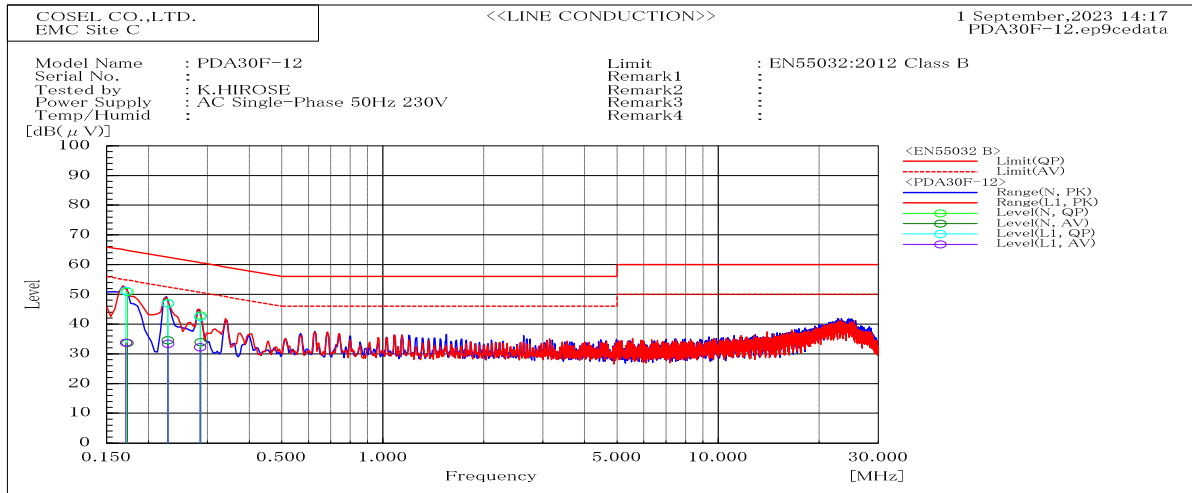


Frequency MHz	Line	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/Fail	Remark
		QP	AV	QP	AV	QP	AV		
0.171	L1	51.2	33.8	64.9	54.9	13.7	21.1	Pass	
0.229	L1	46.9	33.4	62.5	52.5	15.6	19.1	Pass	
0.285	L1	42.4	32.2	60.7	50.7	18.3	18.5	Pass	
0.173	N	50.8	33.7	64.8	54.8	14	21.1	Pass	
0.228	N	47	34.6	62.5	52.5	15.5	17.9	Pass	
0.286	N	42.8	33.9	60.6	50.6	17.8	16.7	Pass	

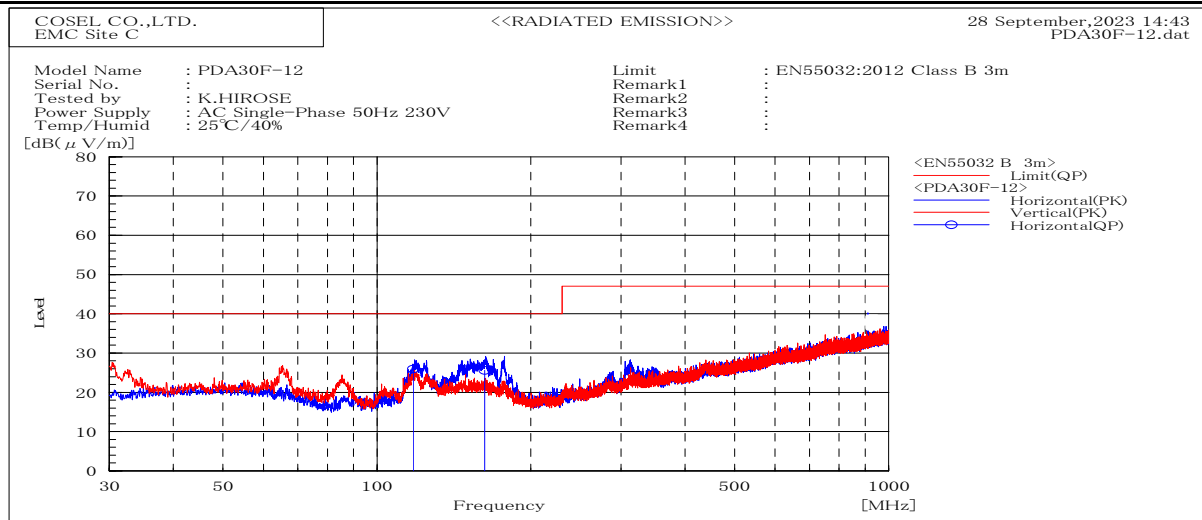


Frequency MHz	Polarization	Stability	Level dB(μV/m)		Margin dB	Pass/Fail	Height cm	Angle deg	Remark
			QP	QP	QP				
117.702	H	Stable	26	40	14	Pass	167.9	173.6	
162.374	H	Stable	25.6	40	14.4	Pass	190.5	340.8	

DATA SHEET		Date	02-Dec-23
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	K.HIROSE

1. Line conduction

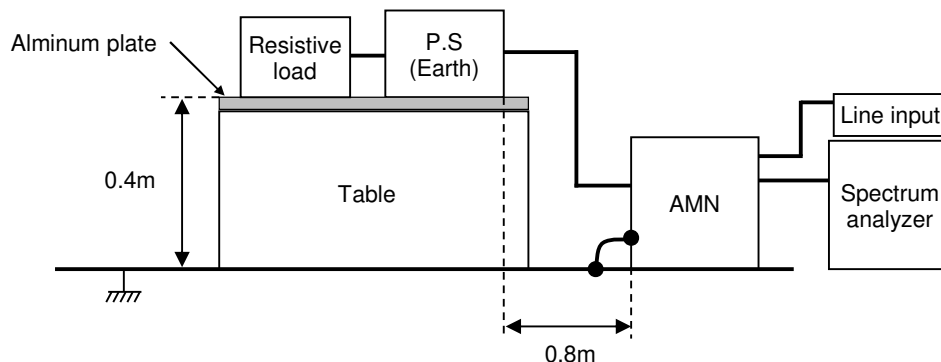

2. Radiated emission

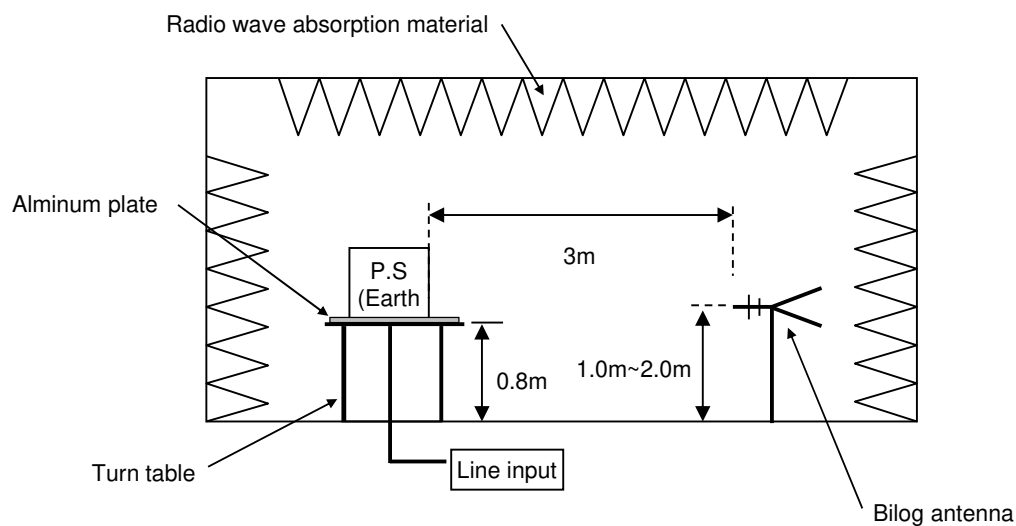

Conditions

Test : EMI
Model Nam: PDA30F-12

1.LINE CONDUCTION



2.RADIATED EMISSION

