



DATA SHEET		Date	02-Dec-23
Model	PDA30F-5	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	K.HIROSE

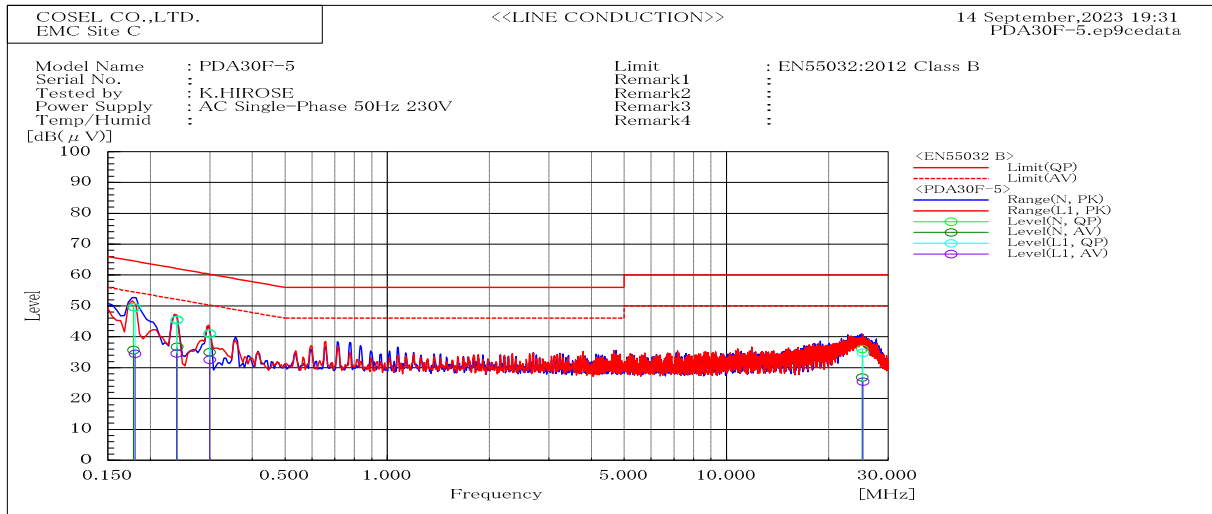


Frequency MHz	Line	Level dB(μ V)		Limit dB(μ V)		Margin dB		Pass/Fail	Remark
		QP	AV	QP	AV	QP	AV		
0.18	L1	49.5	34.5	64.5	54.5	15	20	Pass	
0.239	L1	45.3	34.6	62.1	52.1	16.8	17.5	Pass	
0.299	L1	40.9	32.6	60.3	50.3	19.4	17.7	Pass	
25.273	L1	34.9	25.5	60	50	25.1	24.5	Pass	
0.179	N	49.6	35.7	64.6	54.6	15	18.9	Pass	
0.24	N	45.6	36.8	62.1	52.1	16.5	15.3	Pass	
0.299	N	41.2	35	60.3	50.3	19.1	15.3	Pass	
25.16	N	36.1	26.9	60	50	23.9	23.1	Pass	

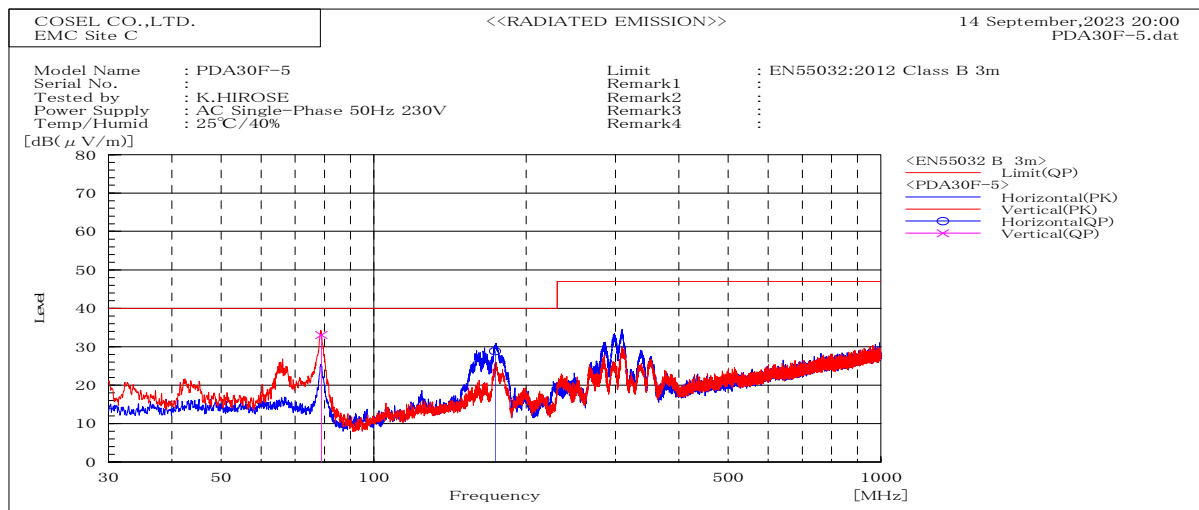


Frequency MHz	Polarization	Stability	Level dB(μ V/m)		Margin dB	Pass/Fail	Height cm	Angle deg	Remark
			QP	QP					
78.797	V	Stable	33.1	40	6.9	Pass	100	149.6	
173.515	H	Stable	28.8	40	11.2	Pass	200	184.6	

DATA SHEET		Date	02-Dec-23
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	K.HIROSE

1. Line conduction

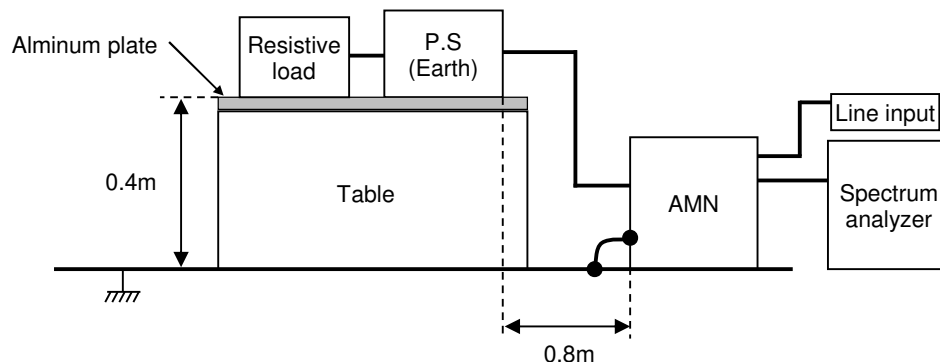

2. Radiated emission

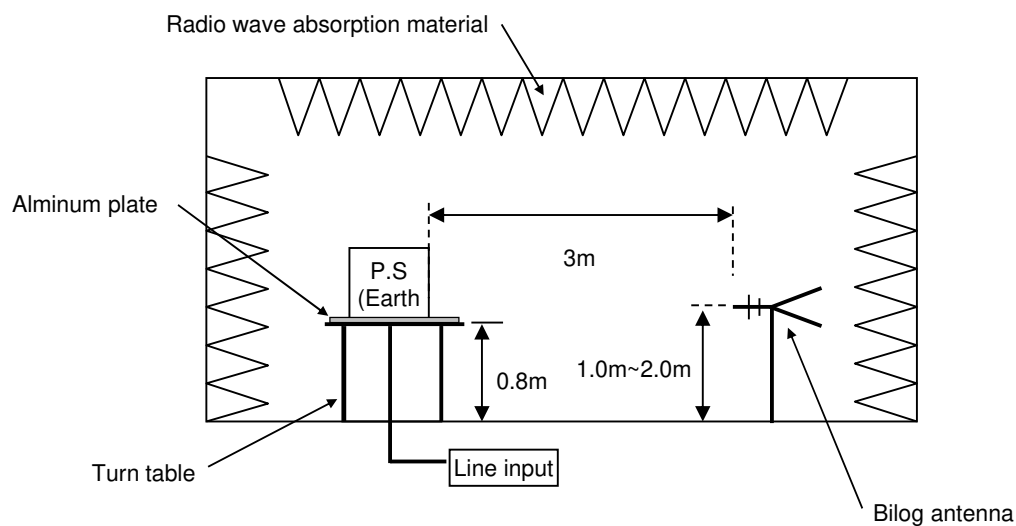

Conditions

Test : EMI
Model Nam: PDA30F-5

1.LINE CONDUCTION**2.RADIATED EMISSION**