


## PDA50F-5 Expected Life : 推定寿命

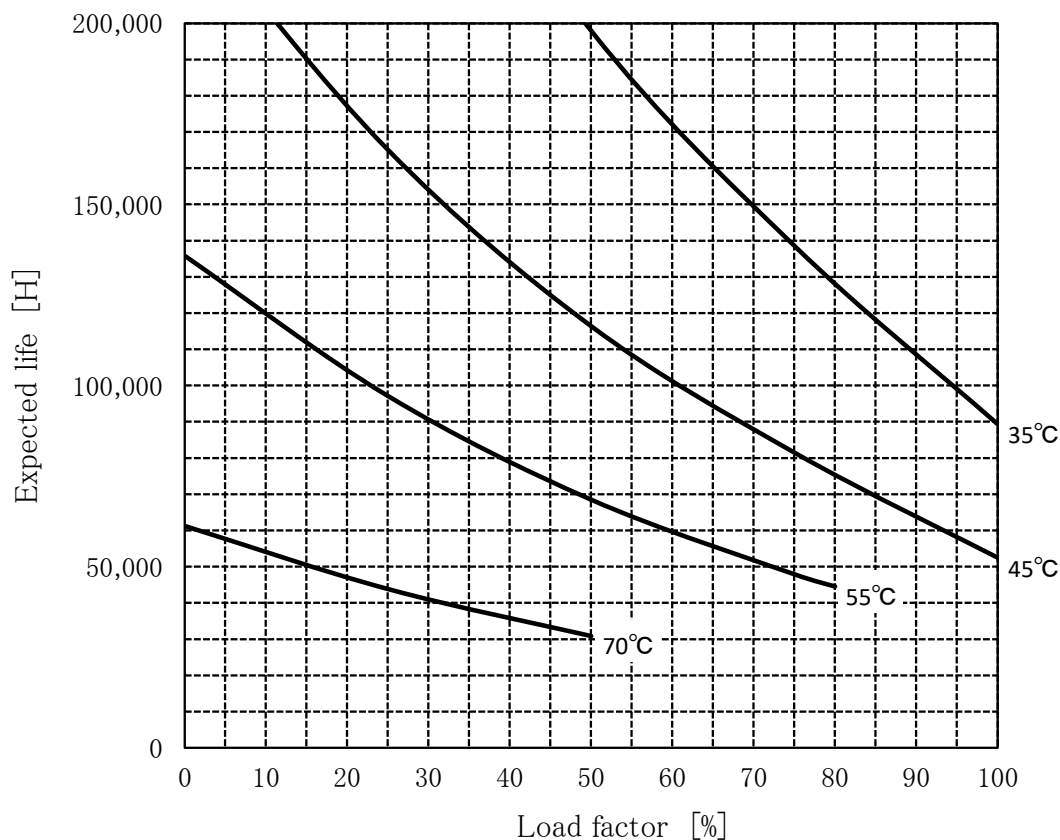

- Above expected life time is calculated according our calculation standard.  
上記推定寿命は、当社算出基準に従い算出したものです。
- Over the area of 100,000 hours, the degradation of sealing rubber, etc., is not included in the calculation.  
10万時間以上の領域では、封ロゴムの劣化等の影響は、計算式には含まれていません。
- Please refer derating curve shown in instruction manual about the maximum value of ambient temperature. The upper limit of ambient temperature is, please refer derating table in instruction manual.

## Conditions

(1) Input voltage

85~264VAC 60Hz

(2) Output voltage/  
current



DC OUTPUT	Load factor			
	100%	75%	50%	25%
5V	10A	7.5A	5A	2.5A

(3) Cooling method

Convection

(4) Mounting method

Refer to the below

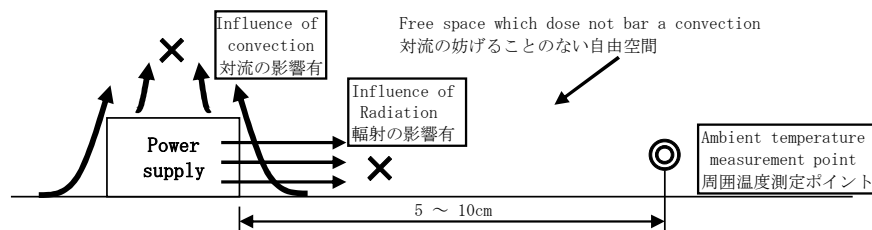

Mounting method(C)

With the ambient temperature of graph, it measures in the environment of a figure.  
グラフの周囲温度とは、図の環境で測定したものです。