



DATA SHEET		Date	19-Jun-25
Model	PDA600F-12	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	K.Nishio

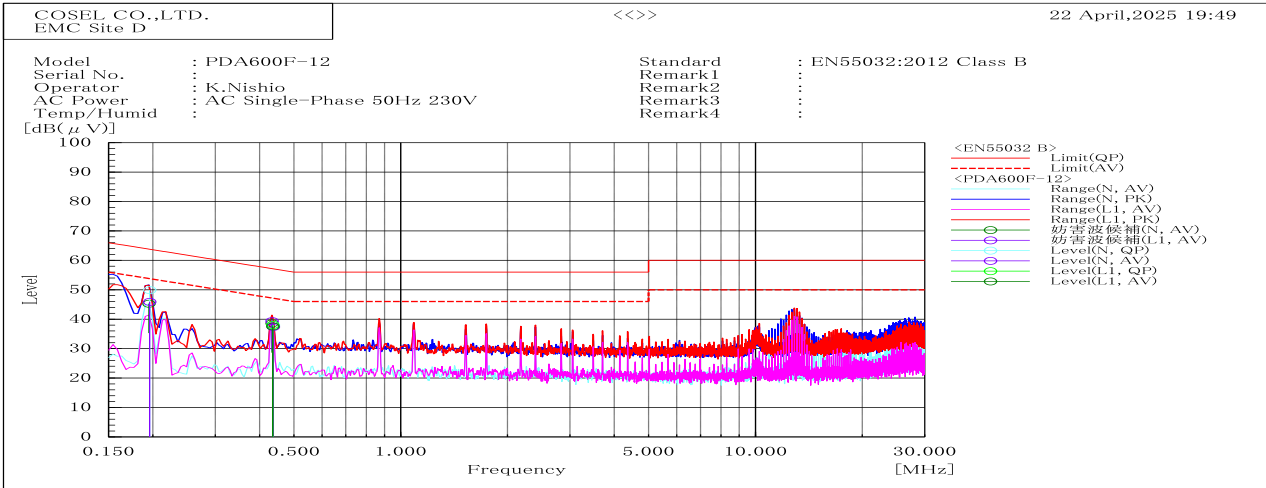


Frequency	Line	Level		Limit		Margin		Pass/Fail	Remark
MHz		dB(μV)		dB(μV)		dB			
		QP	AV	QP	AV	QP	AV		
0.436	L1	38.1	37.5	57.1	47.1	19	9.6	Pass	
0.196	N	49.9	45.9	63.8	53.8	13.9	7.9	Pass	
0.437	N	37.9	37.4	57.1	47.1	19.2	9.7	Pass	

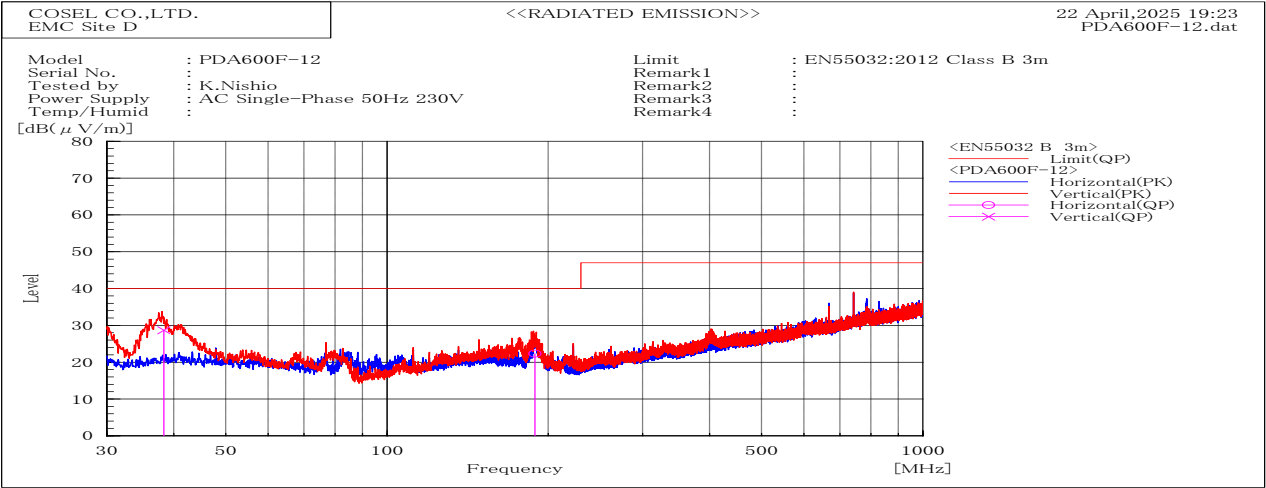


Frequency MHz	Polarization	Stability	Level	Limit	Margin	Pass/Fail	Height cm	Angle deg	Remark
			dB(uV/m) QP	dB(uV/m) QP	dB QP				
38.316	V	Stable	28.7	40	11.3	Pass	100.3	123.5	
188.767	H	Stable	22.3	40	17.7	Pass	188.1	51.9	

DATA SHEET		Date	19-Jun-25
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	K.Nishio

1. Line conduction

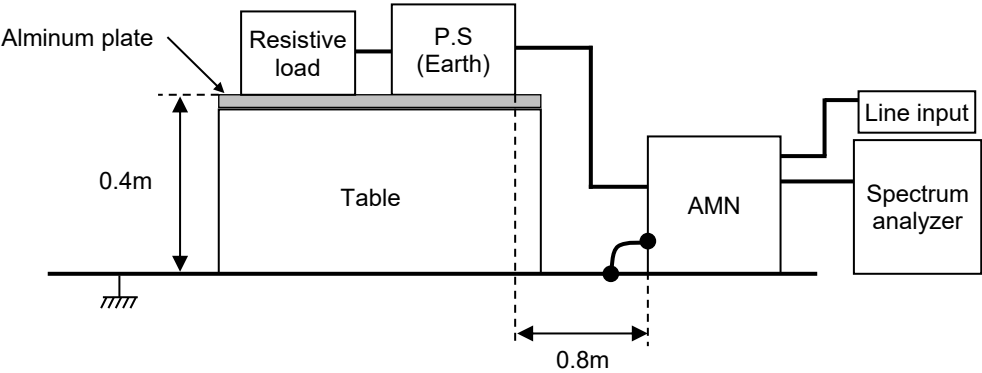


2. Radiated emission

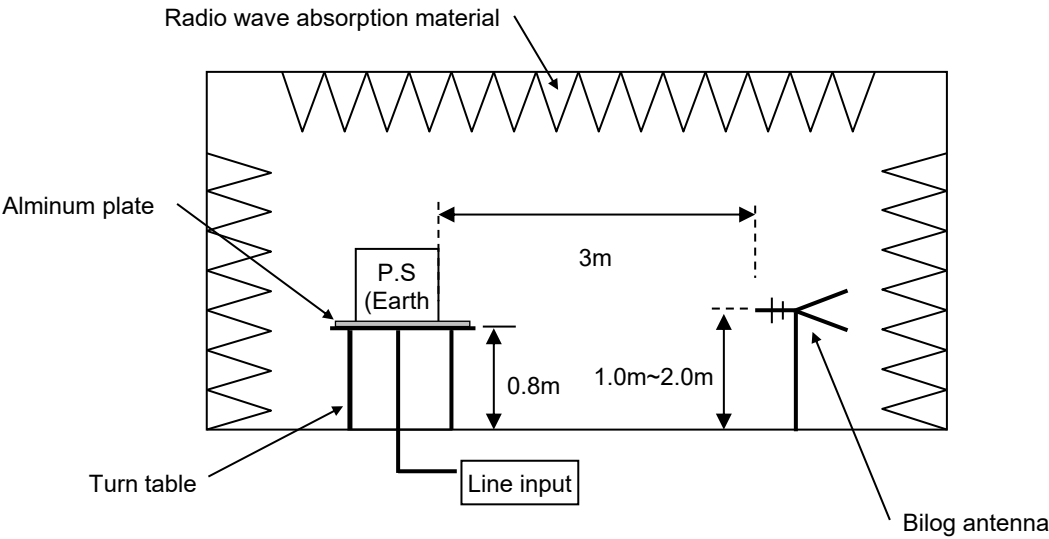

Conditions

Test : EMI
Model Name : PDA600F-12

1.LINE CONDUCTION

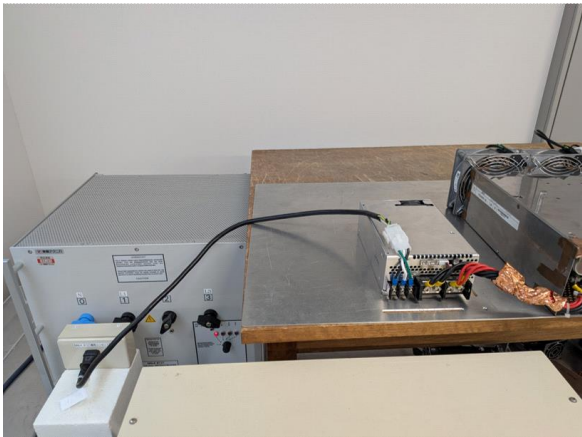

2.RADIATED EMISSION

