



DATA SHEET		Date	19-Jun-25
Model	PDA600F-15	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	K.Nishio

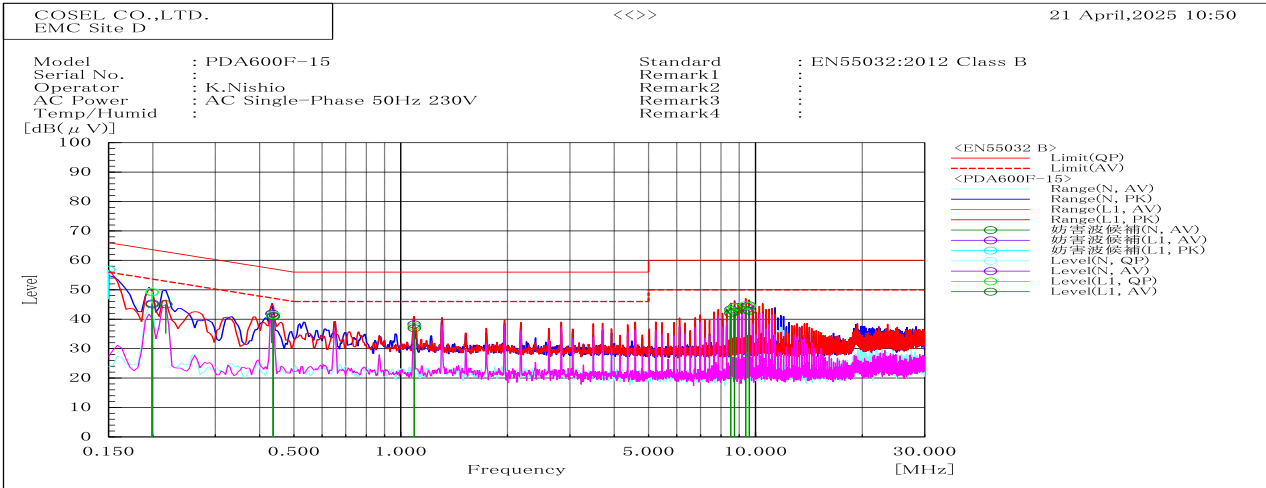


Frequency MHz	Line	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/Fail	Remark
		QP	AV	QP	AV	QP	AV		
0.199	L1	49.2	45.1	63.7	53.7	14.5	8.6	Pass	
0.437	L1	41.4	41	57.1	47.1	15.7	6.1	Pass	
1.092	L1	37.6	37	56	46	18.4	9	Pass	
8.515	L1	43.1	42	60	50	16.9	8	Pass	
8.734	L1	44.1	42.6	60	50	15.9	7.4	Pass	
9.388	L1	44.8	43.2	60	50	15.2	6.8	Pass	
9.609	L1	44.5	42.9	60	50	15.5	7.1	Pass	
0.199	N	49.5	45.4	63.6	53.6	14.1	8.2	Pass	
0.437	N	41.5	41.1	57.1	47.1	15.6	6	Pass	

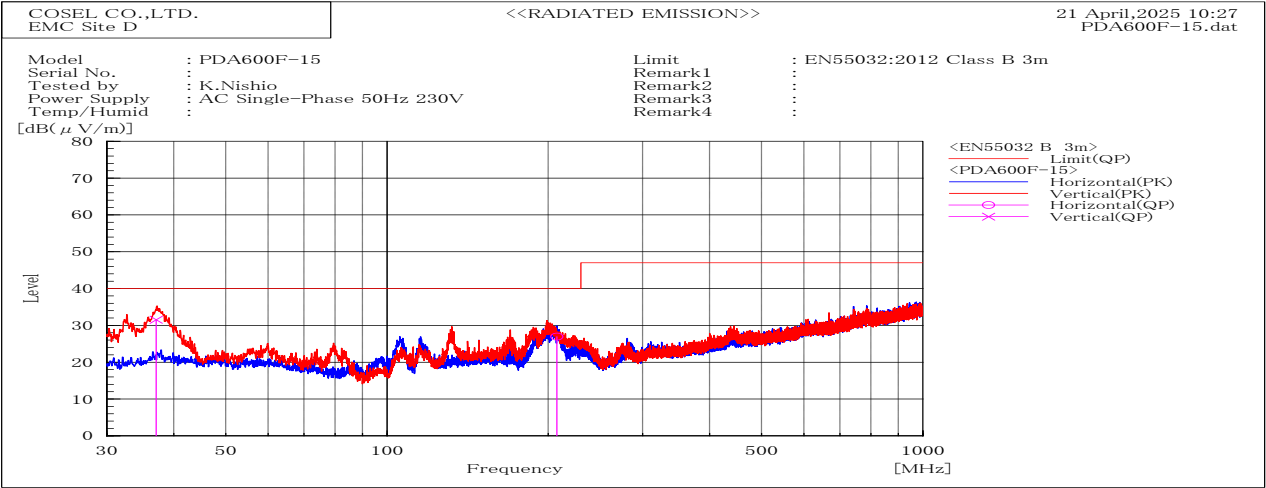


Frequency MHz	Polarization	Stability	Level dB(uV/m)	Limit dB(uV/m)	Margin dB	Pass/Fail	Height cm	Angle deg	Remark
			QP	QP	QP				
37.087	V	Stable	31.5	40	8.5	Pass	100	311.1	
207.476	H	Stable	26.9	40	13.1	Pass	167.6	221.5	

DATA SHEET		Date	19-Jun-25
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	K.Nishio

1. Line conduction

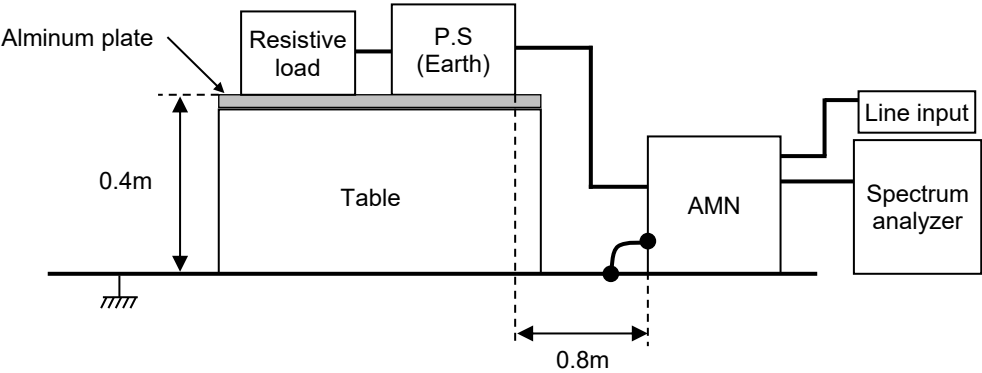


2. Radiated emission

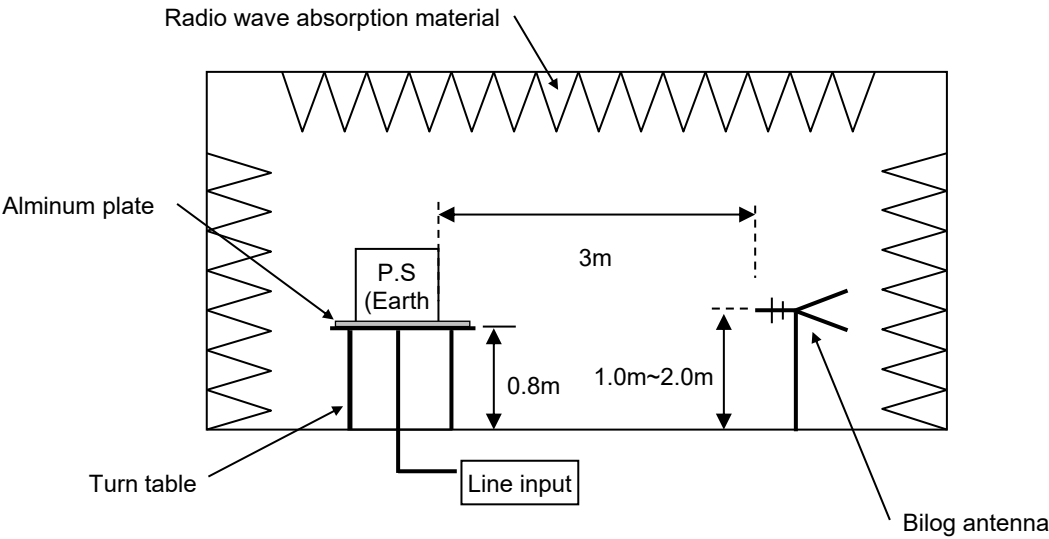

Conditions

Test : EMI
Model Name : PDA600F-15

1.LINE CONDUCTION

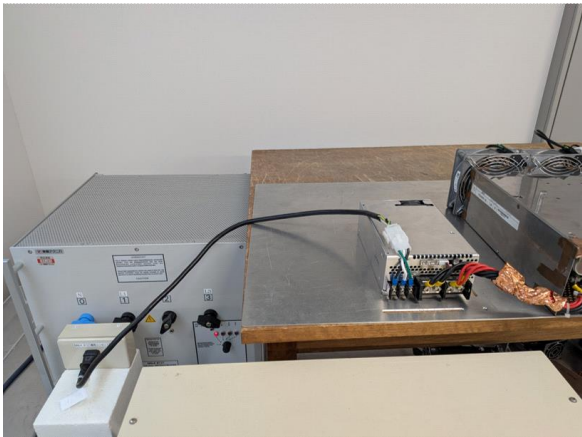

2.RADIATED EMISSION

