



DATA SHEET		Date	01-Sep-16
Model	PJA100F-48	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	K.Murai

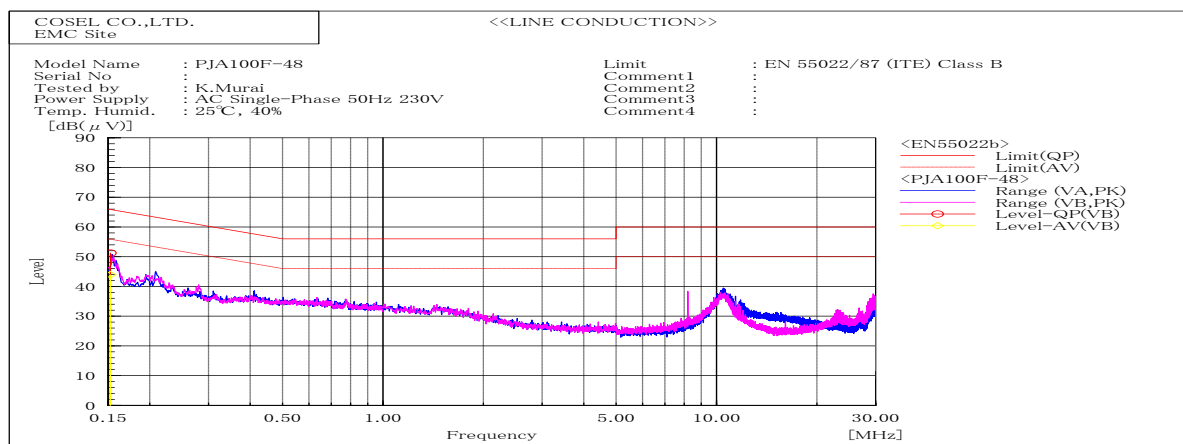


Frequency MHz	Line Phase	Reading dB(μV)		Factor dB	Level dB(μV/m)		Limit dB(μV/m)		Margin dB		Pass/Fail	Remark
		QP	AV		QP	AV	QP	AV	QP	AV		
0.15235	VB	31.0	23.7	20.2	51.2	43.9	65.9	55.9	14.7	12.0	Pass	

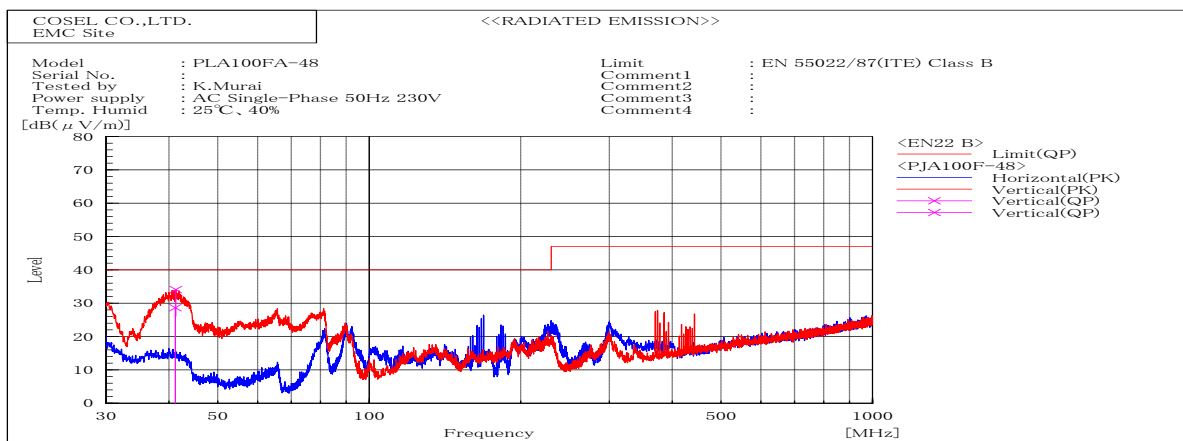

Frequency MHz	Polarization	Stability	Reading dB(μV)		Space Loss dB	Level dB(mW)		Margin dB	Pass/Fail	Height cm	Angle deg	Remark
			QP	AV		QP	AV					
41.176	V	Stable	44.3		-15.6	28.7		11.3	Pass	102	185	

DATA SHEET		Date	01-Sep-16
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	K.Murai

1. Line conduction

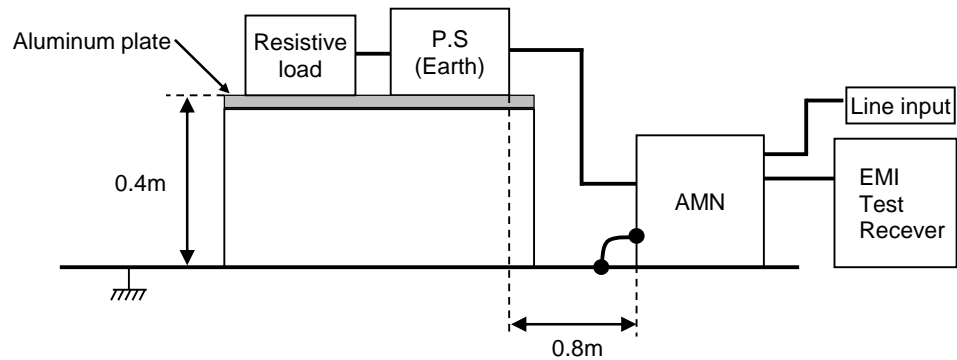

2. Radiated emission

