



DATA SHEET		Date	10-May-17
Model	PJA1500F-24	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	N.Fujita

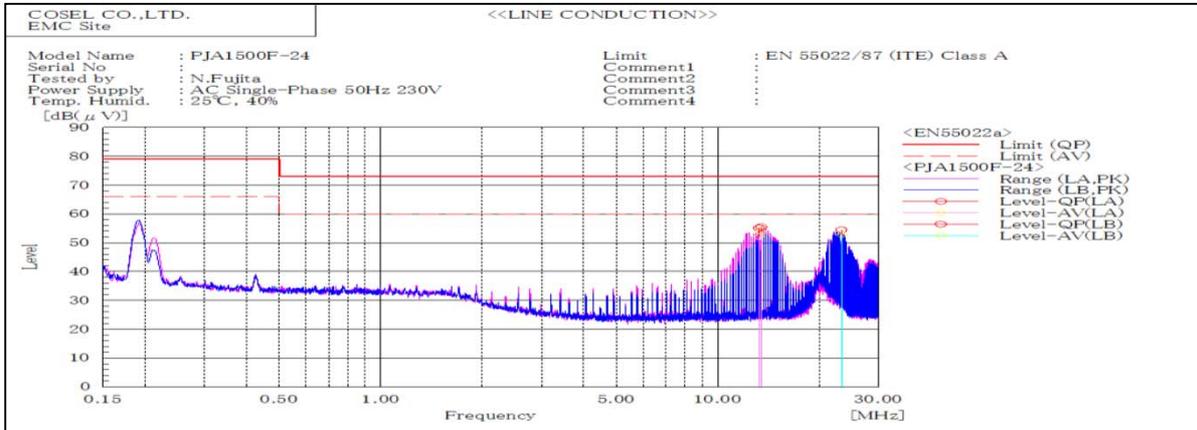


Frequency MHz	Line Phase	Reading dB(uV)		Factor dB	Level dB(uV)		Limit dB(uV)		Margin dB		Pass/Fail	Remark
		QP	AV		QP	AV	QP	AV	QP	AV		
13.24405	LA	33.9	30.9	21.2	55.1	52.1	73	60	17.9	7.9	Pass	
13.4596	LA	34.3	32.6	21.2	55.5	53.8	73	60	17.5	6.2	Pass	
23.286	LB	33.1	31.3	21.4	54.5	52.7	73	60	18.5	7.3	Pass	

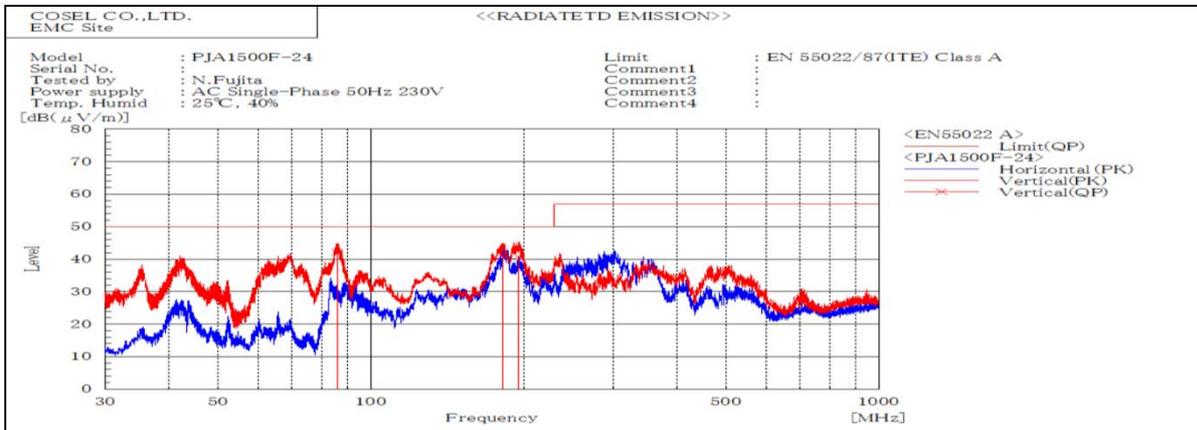

Frequency MHz	Polarization	Stability	Reading dB(uV)	Factor dB(1/m)	Level dB(uV/m)	Limit dB(uV/m)	Margin dB	Pass/Fail	Height cm	Angle deg	Remark
			QP		QP						
86.087	V	Stable	64.4	-22.3	42.1	50	7.9	Pass	147	342	
181.989	V	Stable	55.6	-14.5	41.1	50	8.9	Pass	100	127	
195.013	V	Stable	55.3	-14.4	40.9	50	9.1	Pass	99	166	

DATA SHEET		Date	10-May-17
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	N.Fujita

1. Line conduction

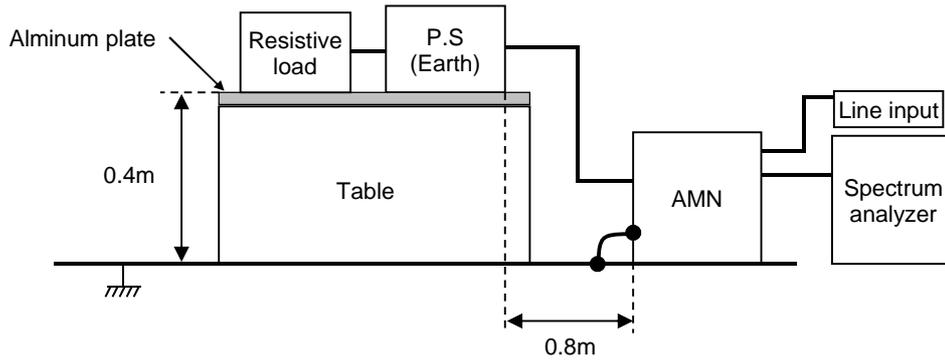

2. Radiated emission

