



DATA SHEET		Date	14-Jul-17
Model	PJA300F-5	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	Kawahata

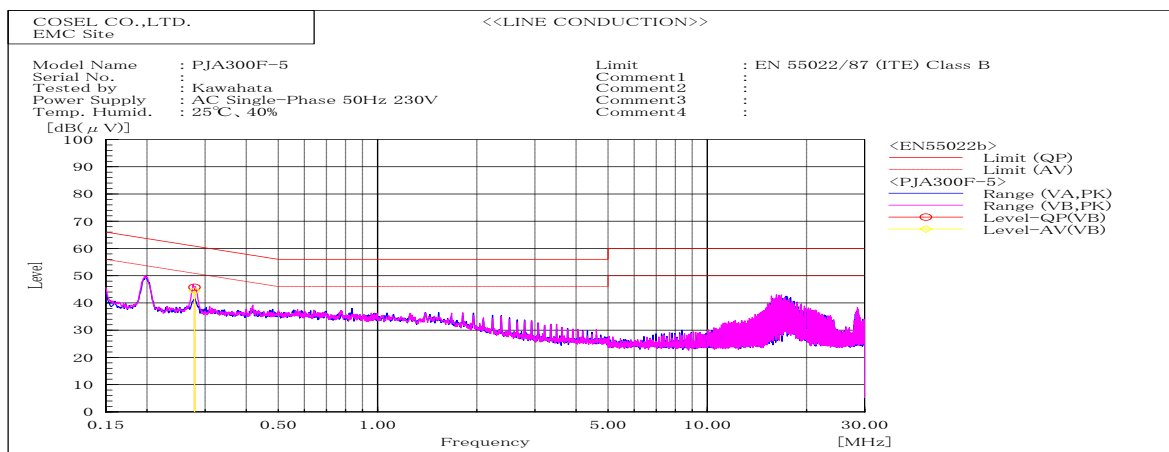


Frequency MHz	Line Phase	Reading dB(μV)		Factor dB	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/Fail	Remark
		QP	AV		QP	AV	QP	AV	QP	AV		
0.27855	VB	25.4	24.1	20.3	45.7	44.4	60.9	50.9	15.2	6.5	Pass	

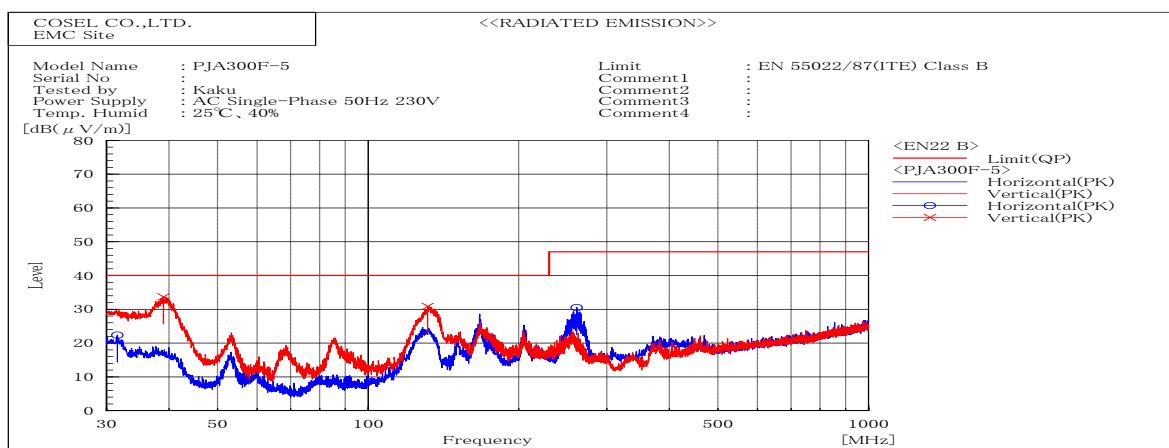

Frequency MHz	Polarization	Stability	Reading dB(μV)	Factor dB(1/m)	Reading dB(μV)	Limit dB(μV/m)	Margin dB(μV/m)	Pass/Fail	Height cm	Angle deg	Remark
			QP		QP	QP	QP				
31.505	H	Stable	24.9	-10.4	14.5	40.0	25.5	Pass	127	165	
39.310	V	Stable	38.4	-11.7	26.7	40.0	13.3	Pass	101	86	
132.428	V	Stable	38.7	-13.4	25.3	40.0	14.7	Pass	103	200	
261.277	H	Stable	32.6	-10.6	22.0	47.0	25.0	Pass	108	245	

DATA SHEET		Date	14-Jul-17
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	Kawahata

1. Line conduction

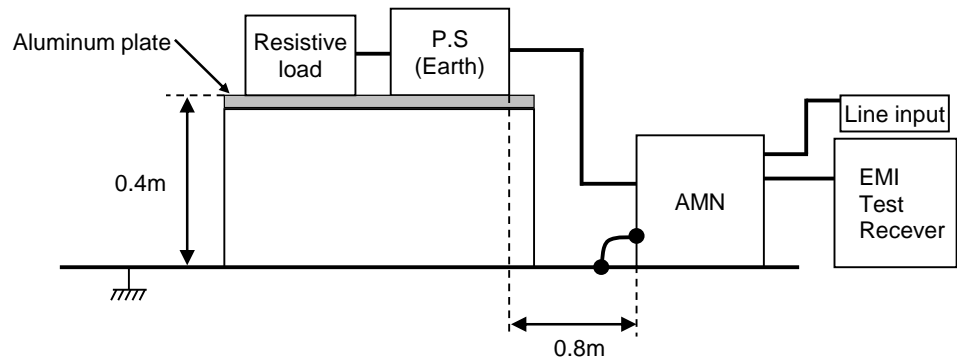

2. Radiated emission

