



DATA SHEET

| | | | |
|-------|--|-----------|------------|
| Model | PJA600F-48 | Date | 09-Dec-16 |
| Test | EMI Line conduction & Radiated emission | Temp. | 25 degreeC |
| | | Humid. | 40 %RH |
| | | Tested by | T.Aoki |

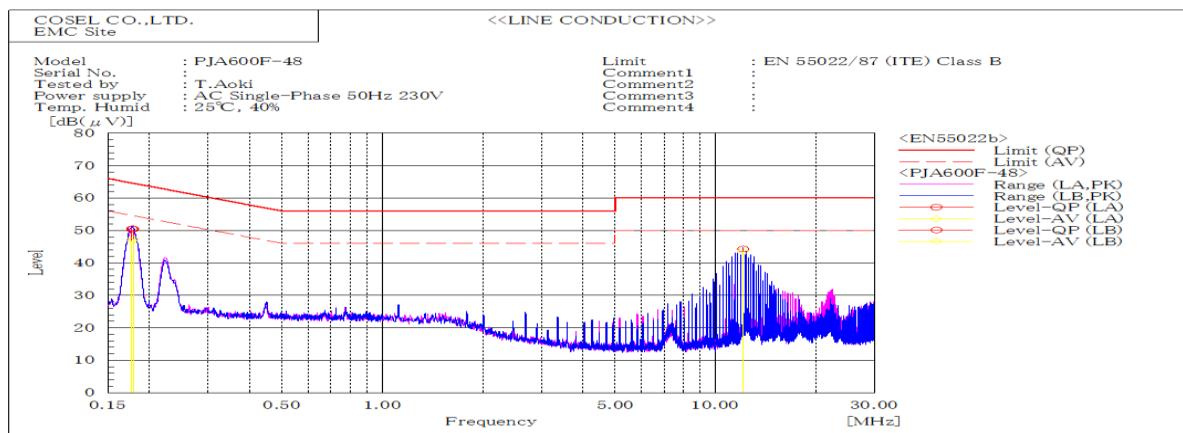


| Frequency MHz | Line Phase | Reading dB(uV) | | Factor dB | Level dB(uV) | | Limit dB(uV) | | Margin dB | | Pass/ Fail | Remark |
|------------------|---------------|-------------------|------|--------------|-----------------|------|-----------------|------|--------------|-----|---------------|--------|
| | | QP | AV | | QP | AV | QP | AV | QP | AV | | |
| 0.17863 | LA | 40.1 | 37 | 10.4 | 50.5 | 47.4 | 64.5 | 54.5 | 14 | 7.1 | Pass | |
| 0.17712 | LB | 40.1 | 36.5 | 10.4 | 50.5 | 46.9 | 64.6 | 54.6 | 14.1 | 7.7 | Pass | |
| 12.1066 | LB | 33.1 | 32.4 | 11.2 | 44.3 | 43.6 | 60 | 50 | 15.7 | 6.4 | Pass | |

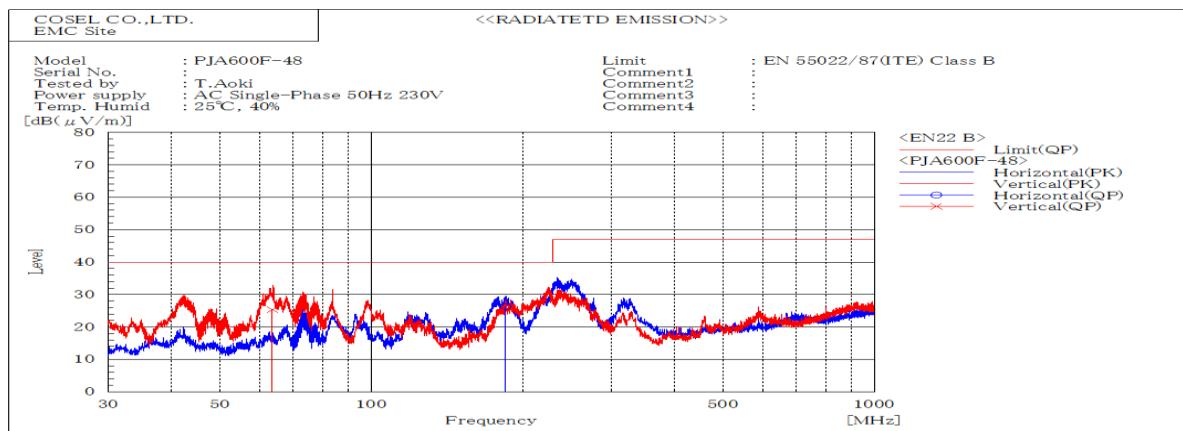

| Frequency MHz | Polariza tion | Stability | Reading dB(uV) | | Factor dB(1/m) | Level dB(uV/m) | | Limit dB(uV/m) | | Margin dB | Pass/ Fail | Height cm | Angle deg | Remark |
|------------------|------------------|-----------|-------------------|-------|-------------------|-------------------|------|-------------------|-----|--------------|---------------|--------------|--------------|--------|
| | | | QP | QP | | QP | QP | QP | QP | | | | | |
| 185.067 | H | Stable | 42.1 | -15.8 | 26.3 | 40 | 13.7 | Pass | 198 | 164 | | | | |
| 63.615 | V | Stable | 40.7 | -15.4 | 25.3 | 40 | 14.7 | Pass | 115 | 233 | | | | |

| DATA SHEET | | Date | 09-Dec-16 |
|------------|--|-----------|------------|
| Model | Circuit used for measurement | Temp. | 25 degreeC |
| Test | EMI Line conduction & Radiated emission | Humid. | 40 %RH |
| | | Tested by | T.Aoki |

1. Line conduction

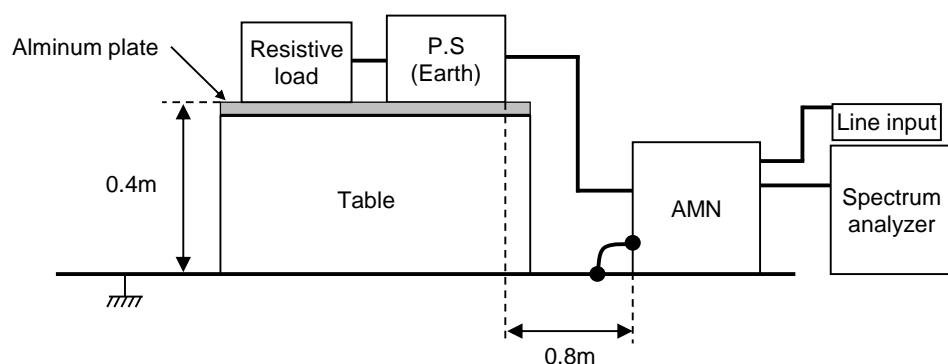

2. Radiated emission

