



DATA SHEET		Date	28-Jan-21
Model	PJMA1000F-36	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	A.Mukai

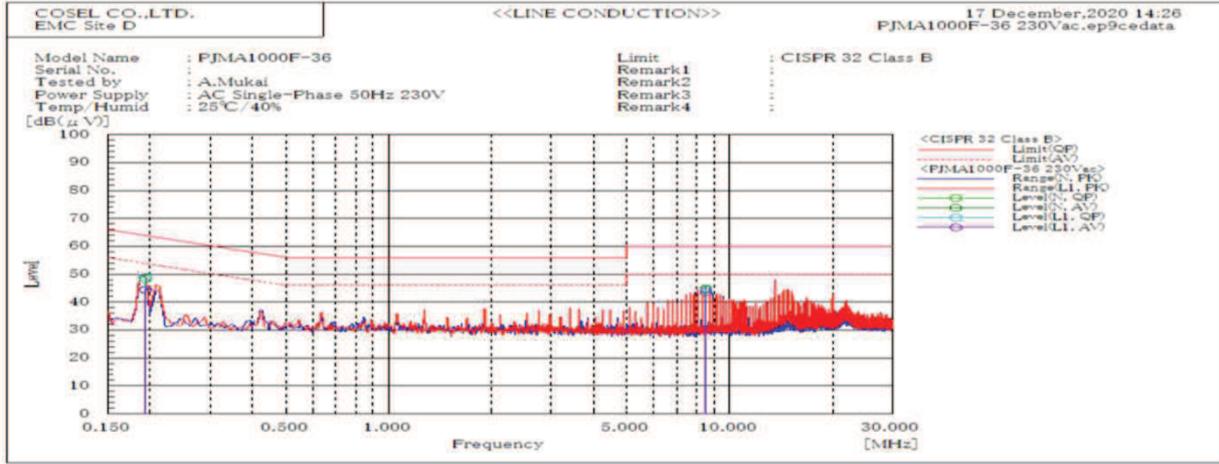


Frequency MHz	Line	Level dB(µV)		Limit dB(µV)		Margin dB		Pass/Fail	Remark
		QP	AV	QP	AV	QP	AV		
		0.194	N	48.3	44.5	63.9	53.9		
0.194	L1	49	44.4	63.9	53.9	14.9	9.5	Pass	
8.516	N	45.1	44.4	60	50	14.9	5.6	Pass	
8.519	L1	44.6	43.5	60	50	15.4	6.5	Pass	

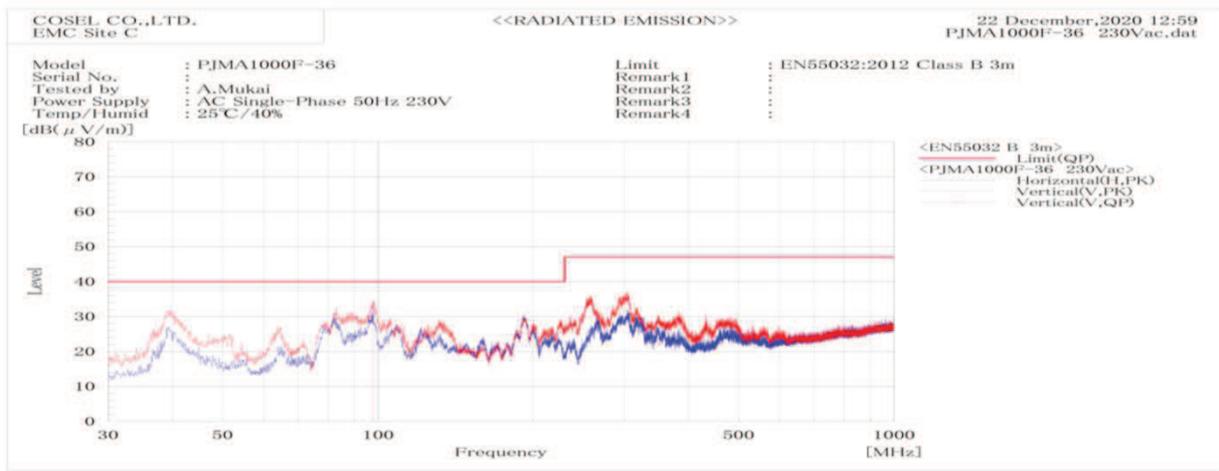


Frequency MHz	Polarization	Stability	Level dB(µV/m)		Limit dB(µV/m)		Margin dB		Pass/Fail	Height cm	Angle deg	Remark
			QP	AV	QP	AV	QP	AV				
97.828	V	Stable	32.8	40	40	40	7.2	7.2	Pass	135.3	61.9	

DATA SHEET		Date	28-Jan-21
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	A.Mukai

1. Line conduction

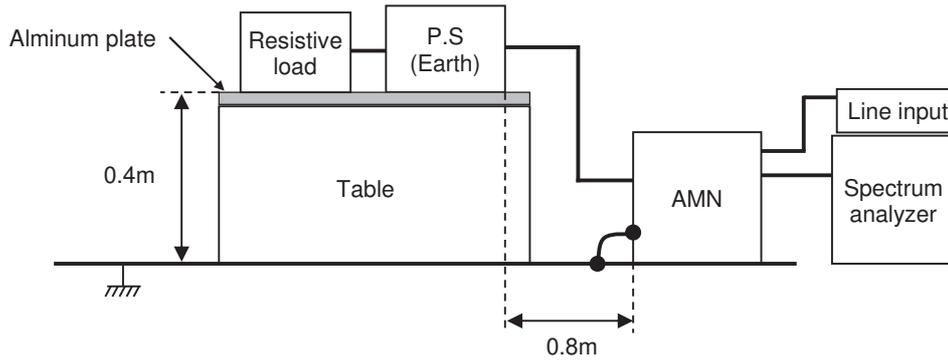

2. Radiated emission

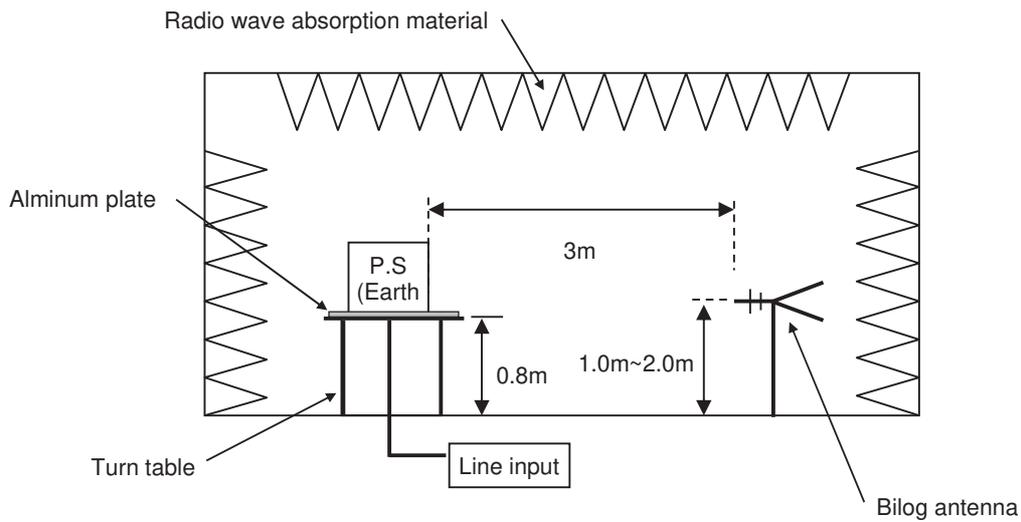

Conditions

Test : EMI
 Model Name: PJMA1000F-36

○Photographs of Test Set-Up

1. LINE CONDUCTION

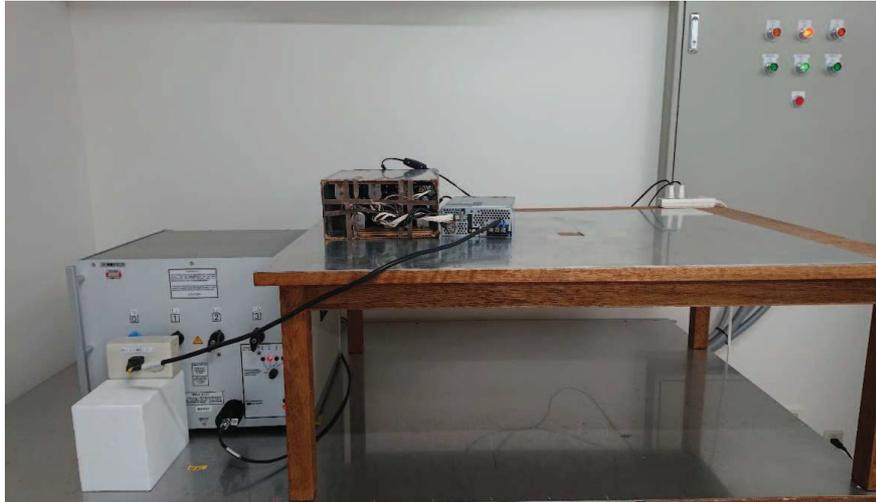


Fig.1 LINE CONDUCTION

○Testing circuitry

2. RADIATED EMISSION

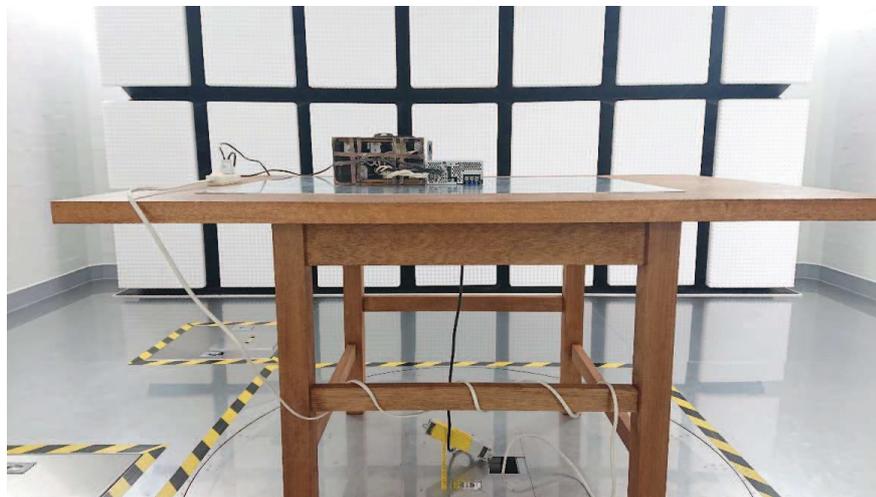


Fig.2 RADIATED EMISSION