



DATA SHEET		Date	29-Sep-22
Model	PJMA1500F-48	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	45 %RH
		Tested by	A.Mukai

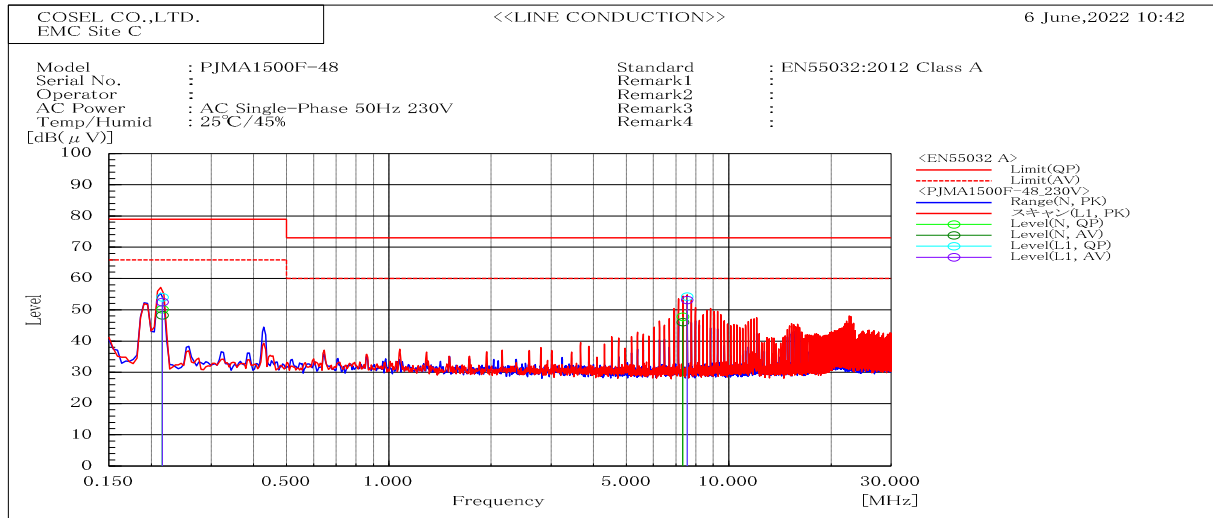


Frequency	Line	Level		Limit		Margin		Pass/Fail	Remark
MHz		dB(μV)		dB(μV)		dB			
		QP	AV	QP	AV	QP	AV		
0.215	L1	54	52.5	79	66	25	13.5	Pass	
0.216	N	50.2	48.2	79	66	28.8	17.8	Pass	
7.33	N	47.8	46	73	60	25.2	14	Pass	
7.547	L1	54.2	53.1	73	60	18.8	6.9	Pass	

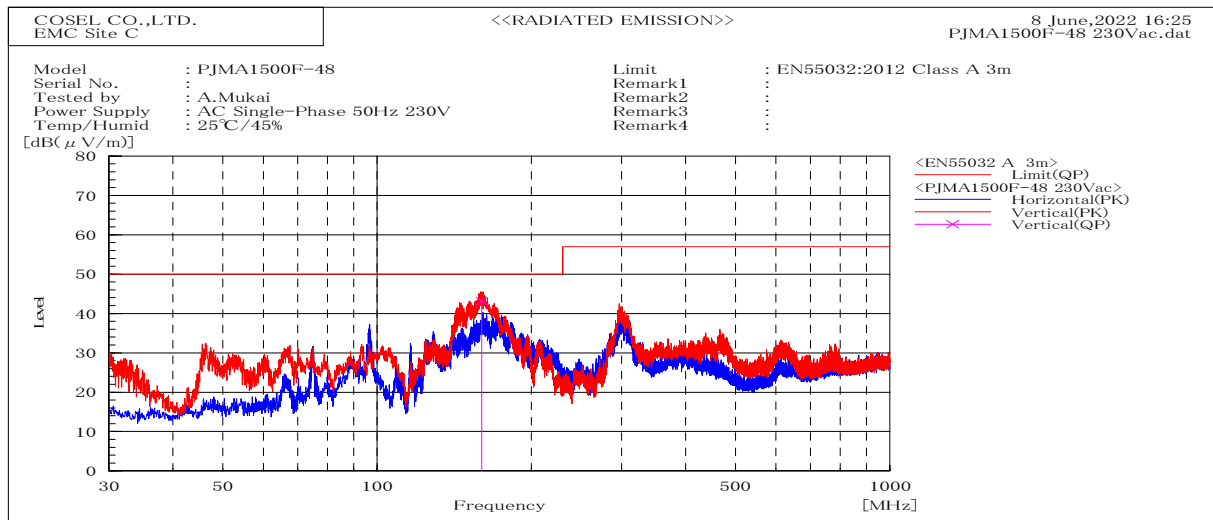


Frequency MHz	Polarization	Stability	Level dB(μV/m)	Limit dB(μV/m)	Margin dB	Pass/Fail	Height cm	Angle deg	Remark
			QP	QP	QP				
159.919	V	Stable	43.1	50	6.9	Pass	100	56.7	

DATA SHEET		Date	29-Sep-22
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	45 %RH
		Tested by	A.Mukai

### 1. Line conduction

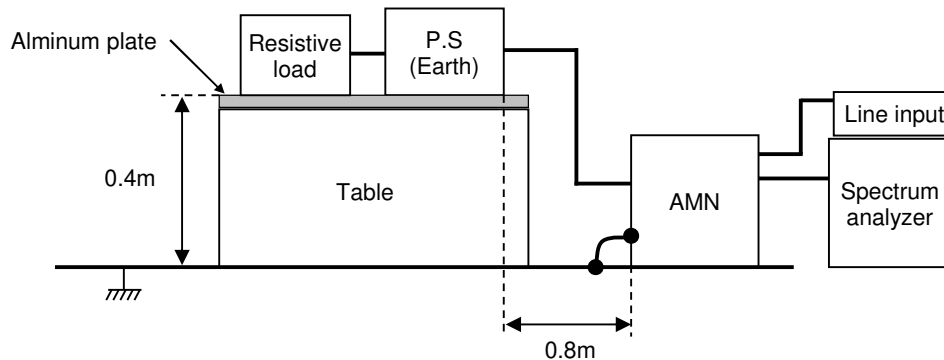

### 2. Radiated emission

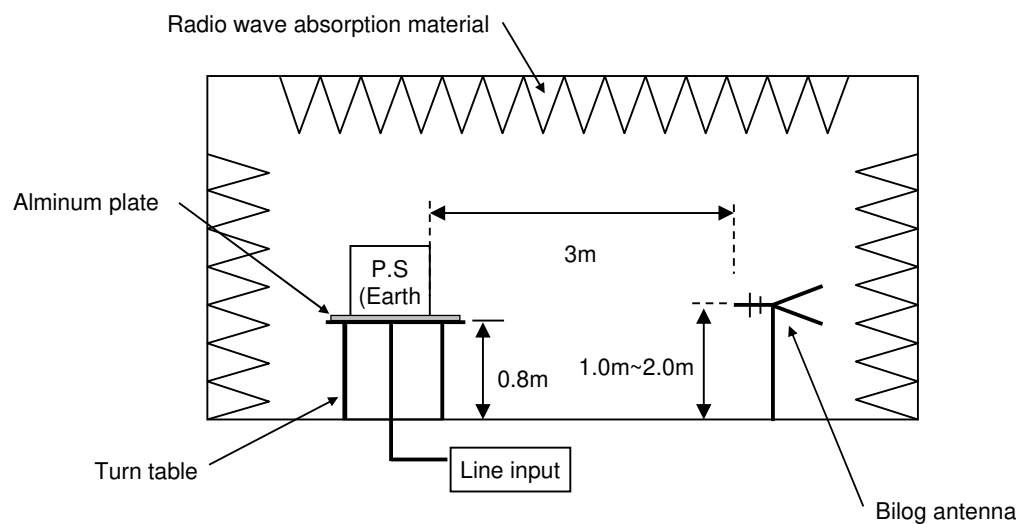

## Conditions

Test : EMI  
Model Name: PJMA1500F-48

○Photographs of Test Set-Up

### 1.LINE CONDUCTION



Fig.1 LINE CONDUCTION

### 2.RADIATED EMISSION

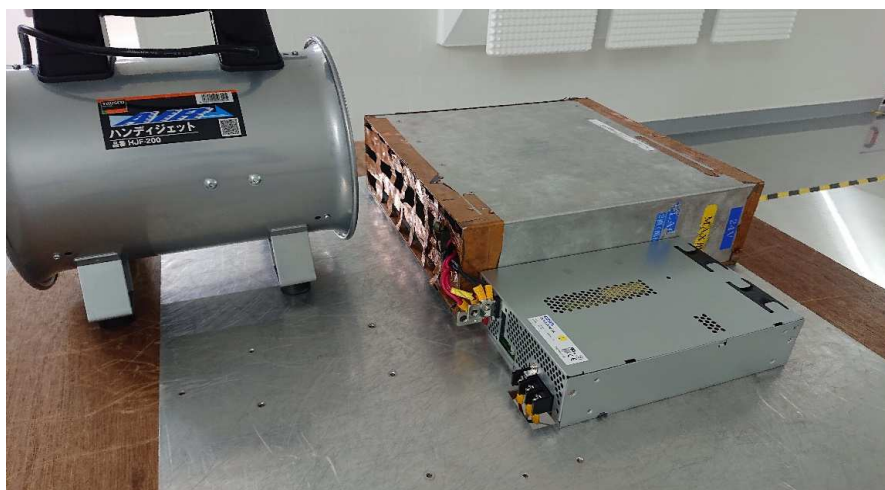


Fig.2 RADIATED EMISSION