



DATA SHEET

DATA SHEET			Date	21-Sep-21
Model	PJMA300F-48		Temp.	25 degreeC
Test	EMI		Humid.	40 %RH
	Line conduction & Radiated emission		Tested by	A.Mukai

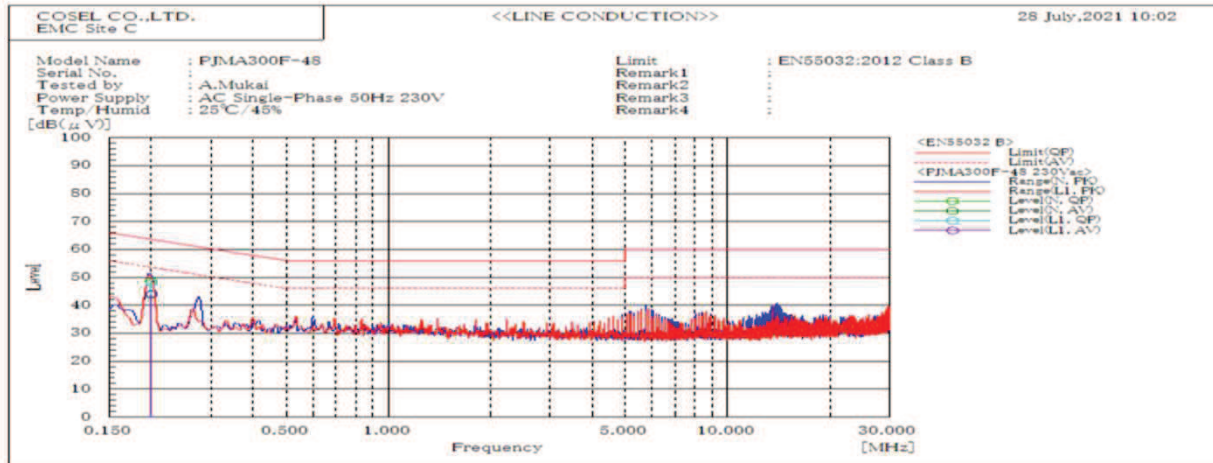


Frequency MHz	Line	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/Fail	Remark
		QP	AV	QP	AV	QP	AV		
0.2	L1	47.9	44.1	63.6	53.6	15.7	9.5	Pass	
0.2	N	48.6	43.8	63.6	53.6	15	9.8	Pass	

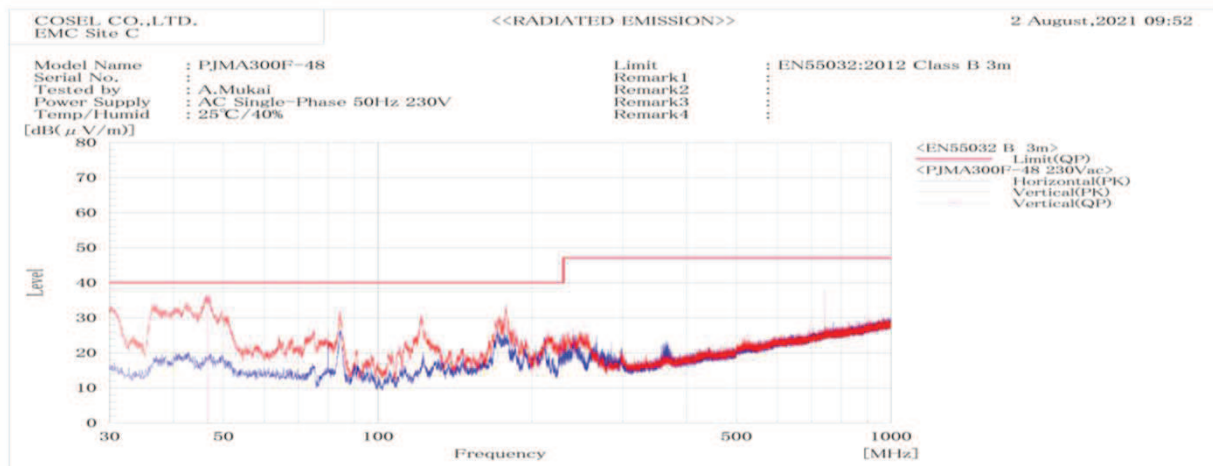


Frequency MHz	Polarization	Stability	Level dB(μV/m)		Limit dB(μV/m)	Margin dB	Pass/Fail	Height cm	Angle deg	Remark
			QP	QP						
46.472	V	Stable	35.9	40	40	4.1	Pass	100	348	

DATA SHEET		Date	21-Sep-21
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	A.Mukai

1. Line conduction

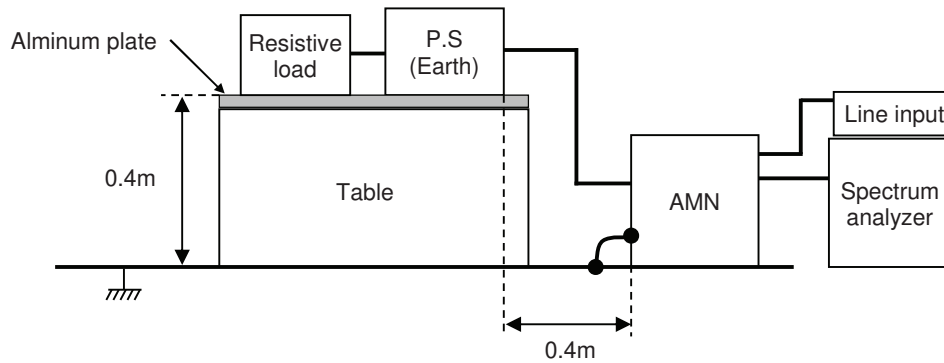

2. Radiated emission

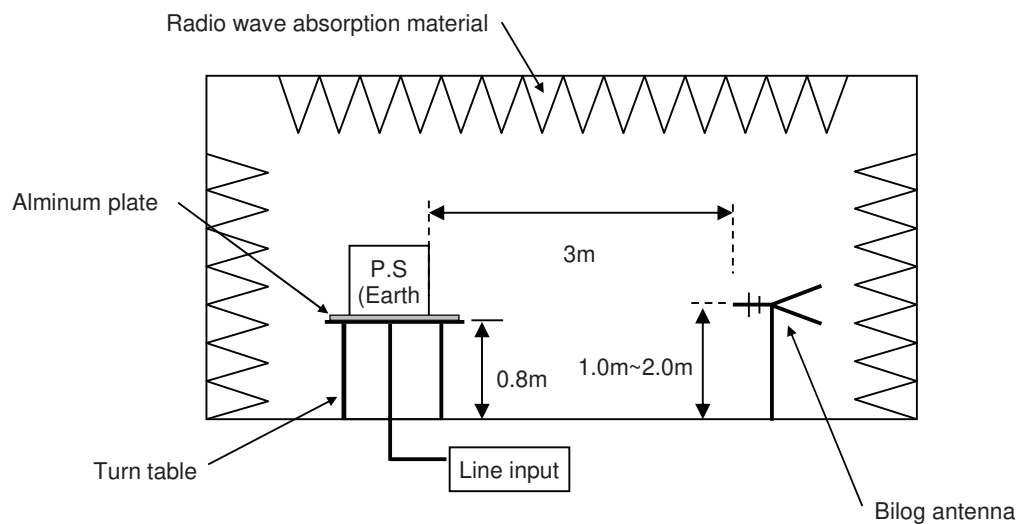

Conditions

Test : EMI
Model Name: PJMA300F-48

○Photographs of Test Set-Up

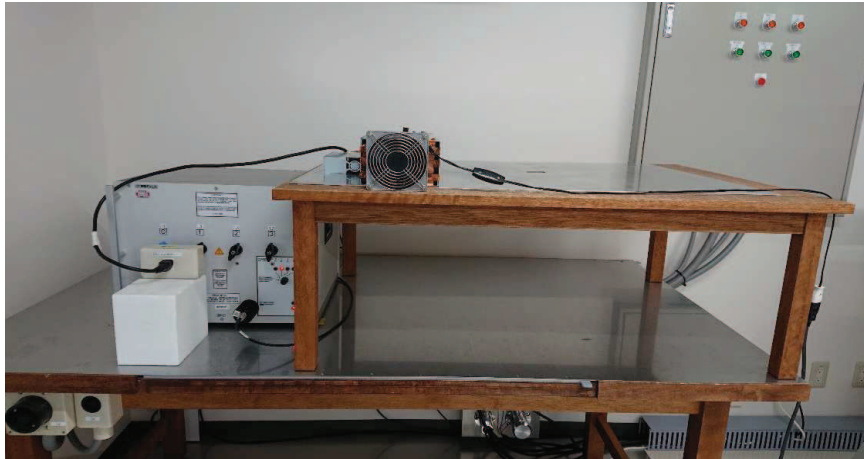
1.LINE CONDUCTION


Fig.1 LINE CONDUCTION

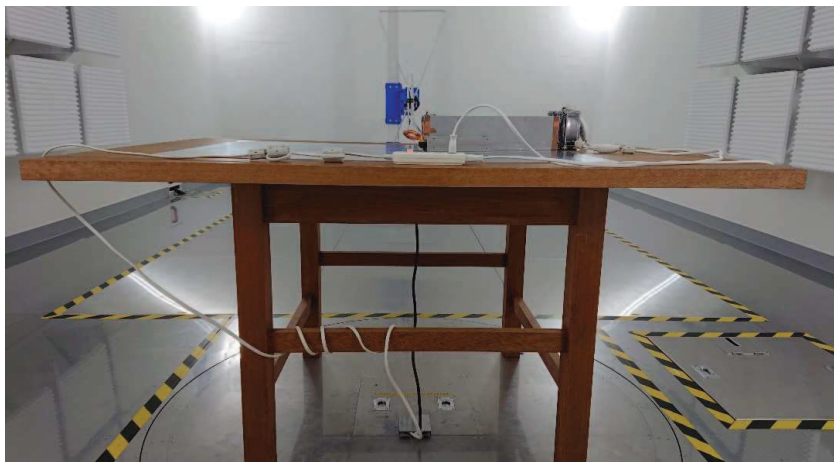
2.RADIATED EMISSION


Fig.2 RADIATED EMISSION