



DATA SHEET

DATA SHEET			Date	20-Jul-20
Model	PJMA600F-24		Temp.	25 degreeC
Test	EMI		Humid.	40 %RH
	Line conduction & Radiated emission		Tested by	A.Mukai

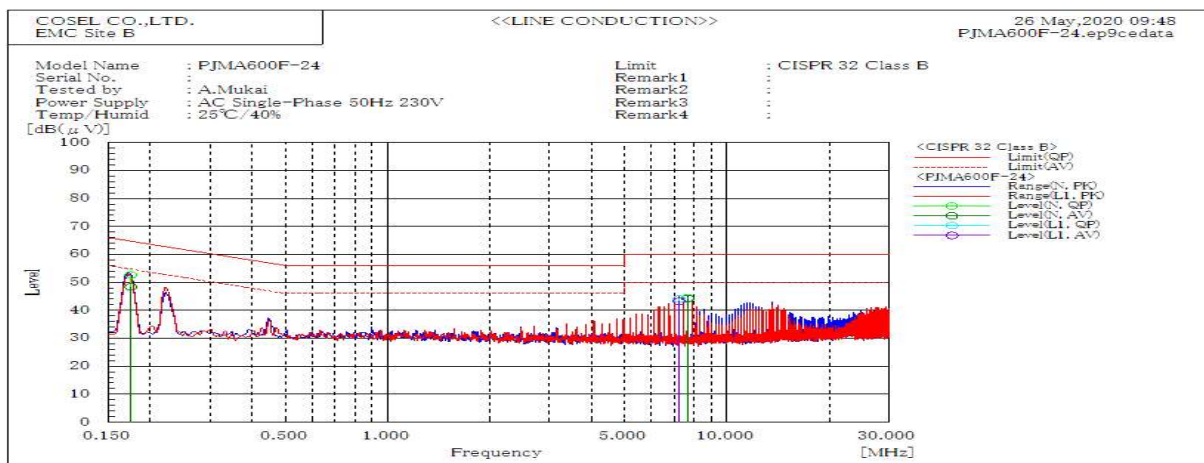


Frequency MHz	Line	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/Fail	Remark
		QP	AV	QP	AV	QP	AV		
0.175	N	52.6	48.4	64.7	54.7	12.1	6.3	Pass	
7.221	L1	44.1	43.3	60	50	15.9	6.7	Pass	
7.674	N	44.5	44.2	60	50	15.5	5.8	Pass	

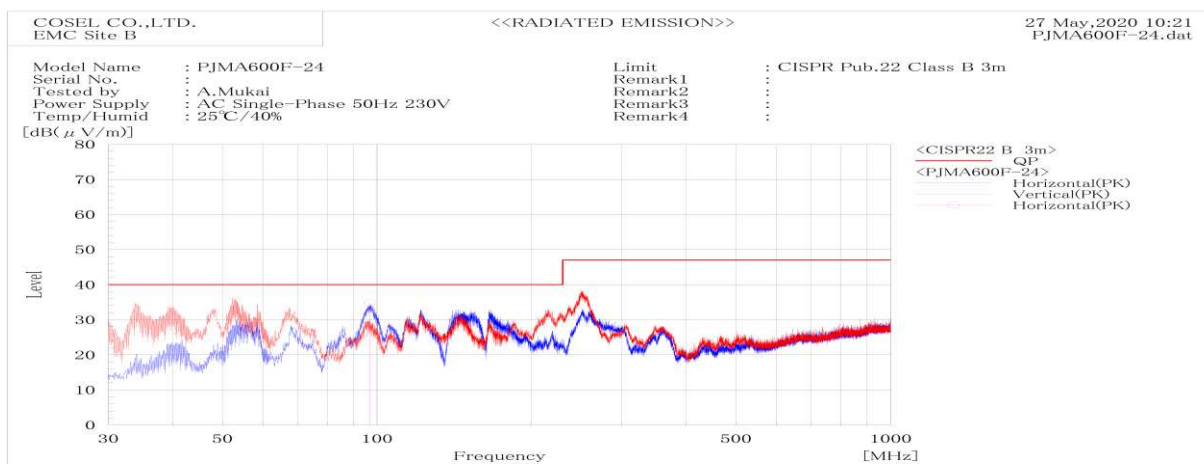


Frequency MHz	Polarization	Stability	Level dB(μV/m)		Limit dB(μV/m)	Margin dB	Pass/Fail	Height cm	Angle deg	Remark
			QP	QP						
96.924	H	Stable	34.8	40	5.2	Pass	188.5	24.4		

DATA SHEET		Date	20-Jul-20
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	A.Mukai

1. Line conduction

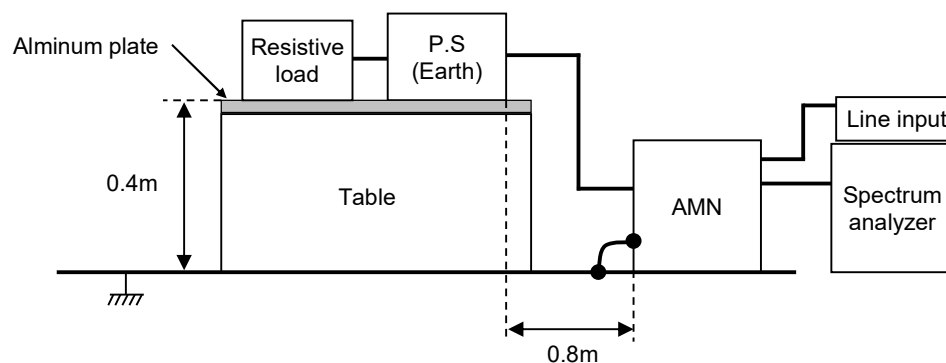

2. Radiated emission

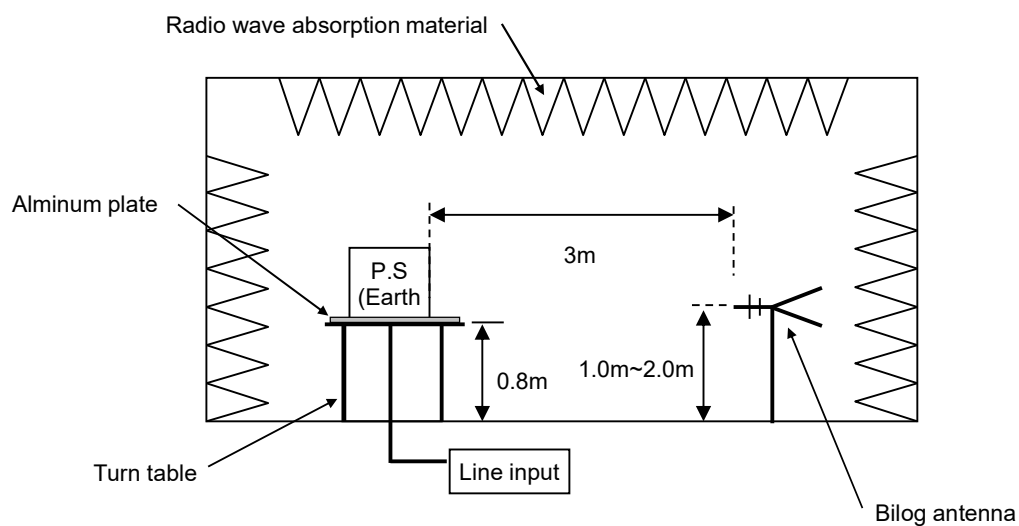

Conditions

Test : EMI
Model Name : PJMA600F-24

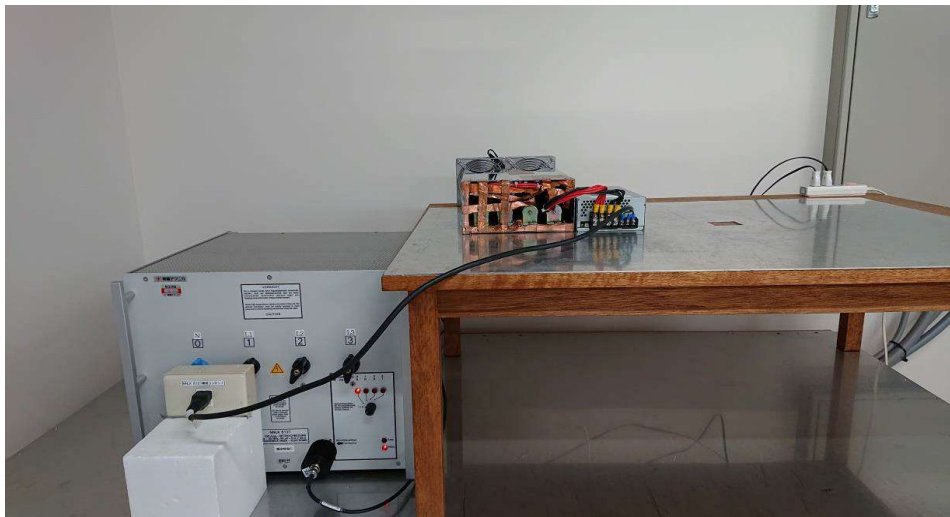
○Photographs of Test Set-Up**1.LINE CONDUCTION**

Fig.1 LINE CONDUCTION

2.RADIATED EMISSION

Fig.2 RADIATED EMISSION