





DATA SHEET		Date	02-Jul-14
Model	PLA50F-24	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	Y.Sugimori

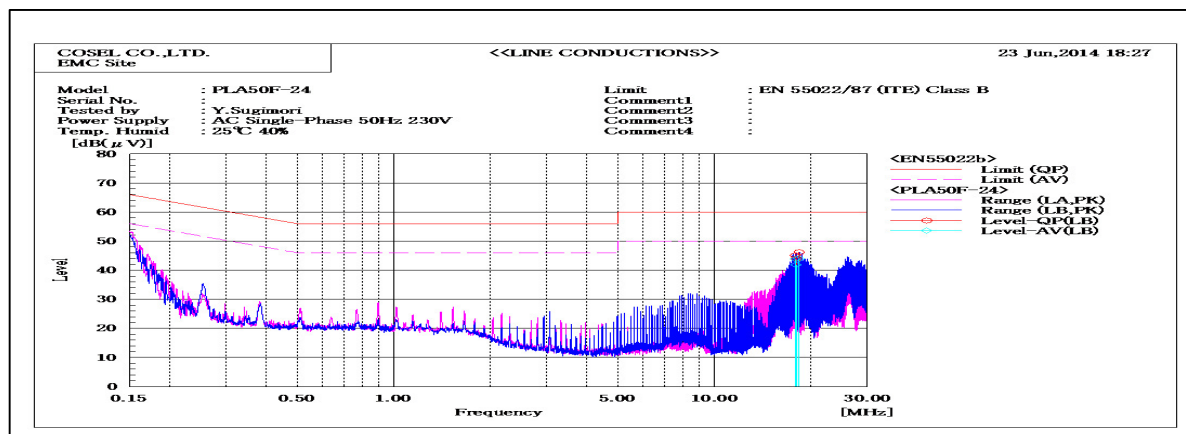


Frequency MHz	Line Phase	Reading dB(μV)		Factor dB	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/ Fail	Remark
		QP	AV		QP	AV	QP	AV	QP	AV		
17.89615	LB	34.7	33.5	10.4	45.1	43.9	60	50	14.9	6.1	Pass	
18.0284	LB	32.9	30.7	11.1	44	41.8	60	50	16	8.2	Pass	
18.4095	LB	34.7	32.5	11.5	46.2	44	60	50	13.8	6	Pass	

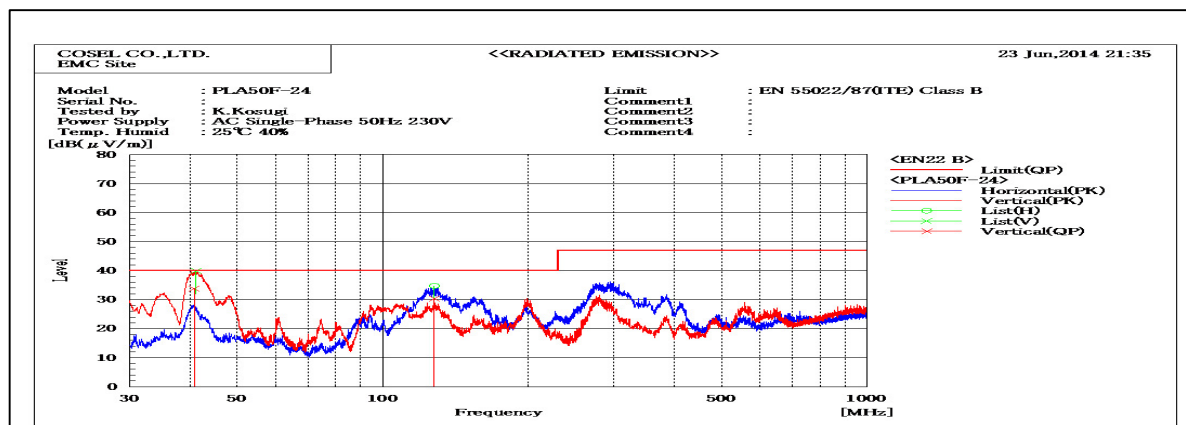

Frequency MHz	Polarization	Reading dB(μV)		Space Loss dB	Level dB(mW)		Limit dB(mW)	Margin dB	Pass/ Fail	Height cm	Angle deg	Remark
		QP	AV		QP	AV						
40.793	V	47.5	-13.7	33.8	40	6.2	Pass	99	4			
127.597	V	45.1	-14.8	30.3	40	9.7	Pass	200	198			

DATA SHEET		Date	02-Jul-14
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	Y.Sugimori

### 1. Line conduction

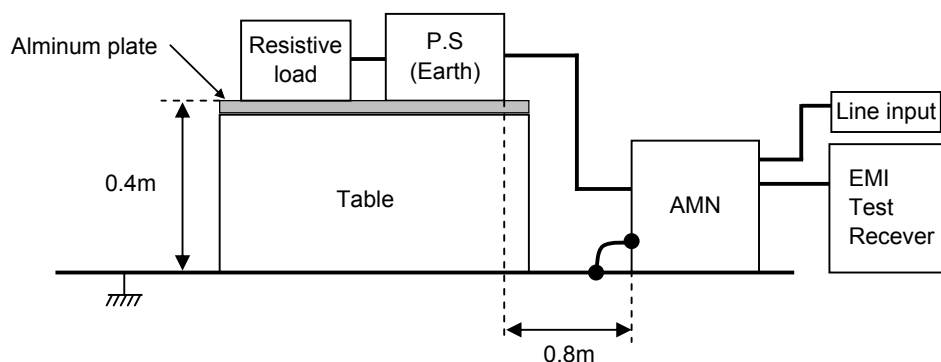

### 2. Radiated emission

