

Temperature increase of main components: 主要部品温度上昇

Model: R10A

1. Conditions

- (1) Input :AC 85 ~ 132 [V]
 (2) Output :Rated output
 (3) Mounting method :Shown as Fig.1.1

2. Result

No.	Parts name	Symbol No.	Increase (ΔT)						Rated temp. [°C]	Reference
			[deg]							
			3V							
1	Rectifier(Input)	SS11	27						150	Junction Temp.
2	Line Filter	L11	25						120	
3	Switching Transistor	TR12	54						150	Junction Temp.
4	Transformer	T11	34						120	
5	Rectified Diode(Output)	D51	57						150	Junction Temp.
6	Output Choke	L51	40						120	
7	Input Capacitor	C12	18						105	
8	Output Capacitor	C52	27						105	
9	Output Capacitor	C53	27						105	
10	Output Capacitor	C59	17						105	
11										
12										
13										
14										
15										
16										
17										
18										
19										
20										

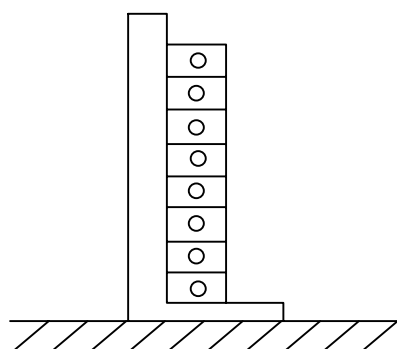


Fig.1.1 Mounting method
(Normal position)