

# TEST DATA OF SNDHS250B48

Regulated DC Power Supply  
June 18, 2011

Approved by : Takahiro Yoneda  
Takahiro Yoneda Design Manager

Prepared by : Tadashi Arai  
Tadashi Arai Design Engineer

**COSEL CO.,LTD.**

## CONTENTS

1. Input Current (by Input Voltage) · · · · ·	1
2. Input Current (by Load Current) · · · · ·	2
3. Input Power (by Load Current) · · · · ·	3
4. Efficiency (by Input Voltage) · · · · ·	4
5. Efficiency (by Load Current) · · · · ·	5
6. Line Regulation · · · · ·	6
7. Load Regulation · · · · ·	7
8. Dynamic Load Response · · · · ·	8
9. Ripple Voltage (by Load Current) · · · · ·	9
10. Ripple-Noise · · · · ·	10
11. Ripple Voltage (by Ambient Temperature) · · · · ·	11
12. Ambient Temperature Drift · · · · ·	12
13. Output Voltage Accuracy · · · · ·	13
14. Time Lapse Drift · · · · ·	14
15. Rise and Fall Time · · · · ·	15
16. Minimum Input Voltage for Regulated Output Voltage · · · · ·	16
17. Overcurrent Protection · · · · ·	17
18. Overvoltage Protection · · · · ·	18
19. Figure of Testing Circuitry · · · · ·	19

(Final Page 19)

**COSEL**


Model	SNDHS250B48																																																																																	
Item	Input Current (by Input Voltage)	Temperature 25°C Testing Circuitry Figure A																																																																																
Object	_____																																																																																	
1.Graph		2.Values																																																																																
<p>Note: Slanted line shows the range of the rated input voltage.</p>		<table border="1"> <thead> <tr> <th rowspan="2">Input Voltage [V]</th> <th colspan="3">Input Current [A]</th> </tr> <tr> <th>Load 0%</th> <th>Load 50%</th> <th>Load 100%</th> </tr> </thead> <tbody> <tr><td>0</td><td>0.000</td><td>0.000</td><td>0.000</td></tr> <tr><td>50</td><td>0.000</td><td>0.000</td><td>0.000</td></tr> <tr><td>100</td><td>0.002</td><td>0.002</td><td>0.002</td></tr> <tr><td>150</td><td>0.000</td><td>0.000</td><td>0.000</td></tr> <tr><td>170</td><td>0.000</td><td>0.000</td><td>0.000</td></tr> <tr><td>180</td><td>0.000</td><td>0.000</td><td>0.000</td></tr> <tr><td>190</td><td>0.019</td><td>0.719</td><td>1.435</td></tr> <tr><td>195</td><td>0.019</td><td>0.699</td><td>1.397</td></tr> <tr><td>200</td><td>0.018</td><td>0.680</td><td>1.360</td></tr> <tr><td>250</td><td>0.016</td><td>0.550</td><td>1.091</td></tr> <tr><td>280</td><td>0.017</td><td>0.495</td><td>0.979</td></tr> <tr><td>300</td><td>0.019</td><td>0.465</td><td>0.917</td></tr> <tr><td>350</td><td>0.019</td><td>0.405</td><td>0.794</td></tr> <tr><td>400</td><td>0.020</td><td>0.360</td><td>0.703</td></tr> <tr><td>405</td><td>0.020</td><td>0.357</td><td>0.695</td></tr> <tr><td>420</td><td>0.014</td><td>0.346</td><td>0.673</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>		Input Voltage [V]	Input Current [A]			Load 0%	Load 50%	Load 100%	0	0.000	0.000	0.000	50	0.000	0.000	0.000	100	0.002	0.002	0.002	150	0.000	0.000	0.000	170	0.000	0.000	0.000	180	0.000	0.000	0.000	190	0.019	0.719	1.435	195	0.019	0.699	1.397	200	0.018	0.680	1.360	250	0.016	0.550	1.091	280	0.017	0.495	0.979	300	0.019	0.465	0.917	350	0.019	0.405	0.794	400	0.020	0.360	0.703	405	0.020	0.357	0.695	420	0.014	0.346	0.673	--	-	-	-	--	-	-	-
Input Voltage [V]	Input Current [A]																																																																																	
	Load 0%	Load 50%	Load 100%																																																																															
0	0.000	0.000	0.000																																																																															
50	0.000	0.000	0.000																																																																															
100	0.002	0.002	0.002																																																																															
150	0.000	0.000	0.000																																																																															
170	0.000	0.000	0.000																																																																															
180	0.000	0.000	0.000																																																																															
190	0.019	0.719	1.435																																																																															
195	0.019	0.699	1.397																																																																															
200	0.018	0.680	1.360																																																																															
250	0.016	0.550	1.091																																																																															
280	0.017	0.495	0.979																																																																															
300	0.019	0.465	0.917																																																																															
350	0.019	0.405	0.794																																																																															
400	0.020	0.360	0.703																																																																															
405	0.020	0.357	0.695																																																																															
420	0.014	0.346	0.673																																																																															
--	-	-	-																																																																															
--	-	-	-																																																																															

**COSEL**

Model	SNDHS250B48	Temperature Testing Circuitry	25°C Figure A																																														
Item	Input Current (by Load Current)																																																
Object	_____																																																
1.Graph		2.Values																																															
<p style="text-align: center;"> <span style="color: black;">—△—</span> Input Volt. 200V  <span style="color: gray;">---□---</span> Input Volt. 280V  <span style="color: gray;">---○---</span> Input Volt. 400V         </p> <table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th>Load Current [A]</th> <th>Input Volt. 200[V]</th> <th>Input Volt. 280[V]</th> <th>Input Volt. 400[V]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>0.018</td><td>0.017</td><td>0.019</td></tr> <tr><td>1.0</td><td>0.280</td><td>0.199</td><td>0.153</td></tr> <tr><td>2.0</td><td>0.535</td><td>0.391</td><td>0.286</td></tr> <tr><td>3.0</td><td>0.792</td><td>0.575</td><td>0.417</td></tr> <tr><td>4.0</td><td>1.054</td><td>0.760</td><td>0.549</td></tr> <tr><td>5.2</td><td>1.372</td><td>0.986</td><td>0.708</td></tr> <tr><td>5.7</td><td>1.508</td><td>1.082</td><td>0.776</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>		Load Current [A]	Input Volt. 200[V]	Input Volt. 280[V]	Input Volt. 400[V]	0.0	0.018	0.017	0.019	1.0	0.280	0.199	0.153	2.0	0.535	0.391	0.286	3.0	0.792	0.575	0.417	4.0	1.054	0.760	0.549	5.2	1.372	0.986	0.708	5.7	1.508	1.082	0.776	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-
Load Current [A]	Input Volt. 200[V]	Input Volt. 280[V]	Input Volt. 400[V]																																														
0.0	0.018	0.017	0.019																																														
1.0	0.280	0.199	0.153																																														
2.0	0.535	0.391	0.286																																														
3.0	0.792	0.575	0.417																																														
4.0	1.054	0.760	0.549																																														
5.2	1.372	0.986	0.708																																														
5.7	1.508	1.082	0.776																																														
--	-	-	-																																														
--	-	-	-																																														
--	-	-	-																																														
--	-	-	-																																														
<p style="text-align: center;"> <span style="color: black;">—△—</span> Input Volt. 200V  <span style="color: gray;">---□---</span> Input Volt. 280V  <span style="color: gray;">---○---</span> Input Volt. 400V         </p> <table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th>Load Current [A]</th> <th>Input Volt. 200[V]</th> <th>Input Volt. 280[V]</th> <th>Input Volt. 400[V]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>0.018</td><td>0.017</td><td>0.019</td></tr> <tr><td>1.0</td><td>0.280</td><td>0.199</td><td>0.153</td></tr> <tr><td>2.0</td><td>0.535</td><td>0.391</td><td>0.286</td></tr> <tr><td>3.0</td><td>0.792</td><td>0.575</td><td>0.417</td></tr> <tr><td>4.0</td><td>1.054</td><td>0.760</td><td>0.549</td></tr> <tr><td>5.2</td><td>1.372</td><td>0.986</td><td>0.708</td></tr> <tr><td>5.7</td><td>1.508</td><td>1.082</td><td>0.776</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>		Load Current [A]	Input Volt. 200[V]	Input Volt. 280[V]	Input Volt. 400[V]	0.0	0.018	0.017	0.019	1.0	0.280	0.199	0.153	2.0	0.535	0.391	0.286	3.0	0.792	0.575	0.417	4.0	1.054	0.760	0.549	5.2	1.372	0.986	0.708	5.7	1.508	1.082	0.776	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-
Load Current [A]	Input Volt. 200[V]	Input Volt. 280[V]	Input Volt. 400[V]																																														
0.0	0.018	0.017	0.019																																														
1.0	0.280	0.199	0.153																																														
2.0	0.535	0.391	0.286																																														
3.0	0.792	0.575	0.417																																														
4.0	1.054	0.760	0.549																																														
5.2	1.372	0.986	0.708																																														
5.7	1.508	1.082	0.776																																														
--	-	-	-																																														
--	-	-	-																																														
--	-	-	-																																														
--	-	-	-																																														
<p>Note: Slanted line shows the range of the rated load current.</p>																																																	

**COSEL**

Model	SNDHS250B48
Item	Input Power (by Load Current)
Object	_____

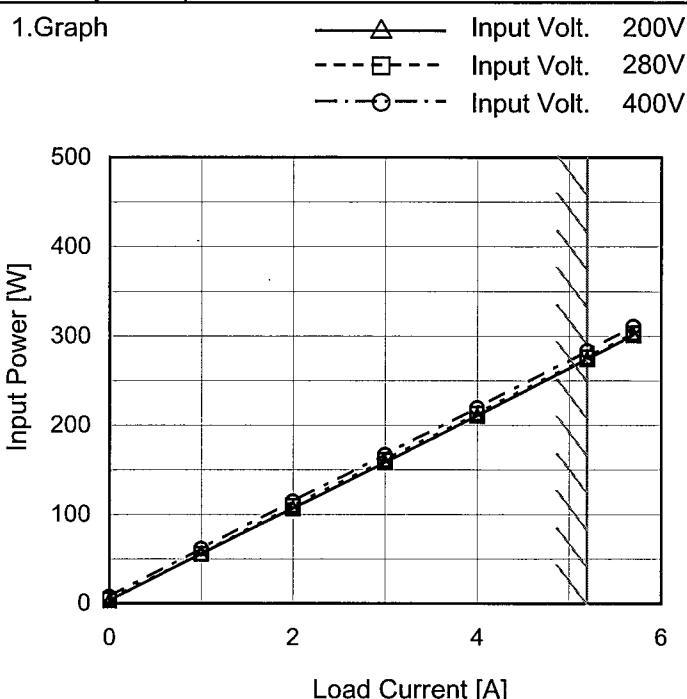

Temperature 25°C  
Testing Circuitry Figure A

## 2. Values

Load Current [A]	Input Power [W]		
	Input Volt. 200[V]	Input Volt. 280[V]	Input Volt. 400[V]
0.0	3.7	4.8	7.7
1.0	56.0	55.8	61.3
2.0	106.9	109.5	114.5
3.0	158.4	161.0	166.9
4.0	210.7	213.0	219.6
5.2	274.3	276.2	283.4
5.7	301.4	303.1	310.6
--	-	-	-
--	-	-	-
--	-	-	-
--	-	-	-

Note: Slanted line shows the range of the rated load current.

**COSEL**

Model	SNDHS250B48	Temperature Testing Circuitry	25°C Figure A																														
Item	Efficiency (by Input Voltage)																																
Object	—																																
1. Graph			2. Values																														
<p>The graph plots Efficiency [%] on the y-axis (44 to 100) against Input Voltage [V] on the x-axis (100 to 500). Two data series are shown: Load 50% (dashed line with square markers) and Load 100% (solid line with triangle markers). Both series show efficiency decreasing as input voltage increases. A slanted line indicates the rated input voltage range.</p> <table border="1"> <thead> <tr> <th>Input Voltage [V]</th> <th>Efficiency Load 50% [%]</th> <th>Efficiency Load 100% [%]</th> </tr> </thead> <tbody> <tr><td>195</td><td>90.9</td><td>90.9</td></tr> <tr><td>200</td><td>91.2</td><td>91.1</td></tr> <tr><td>240</td><td>90.5</td><td>91.1</td></tr> <tr><td>280</td><td>89.5</td><td>90.5</td></tr> <tr><td>320</td><td>88.4</td><td>89.9</td></tr> <tr><td>360</td><td>87.2</td><td>89.1</td></tr> <tr><td>400</td><td>86.0</td><td>88.3</td></tr> <tr><td>420</td><td>85.4</td><td>87.8</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> </tbody> </table>				Input Voltage [V]	Efficiency Load 50% [%]	Efficiency Load 100% [%]	195	90.9	90.9	200	91.2	91.1	240	90.5	91.1	280	89.5	90.5	320	88.4	89.9	360	87.2	89.1	400	86.0	88.3	420	85.4	87.8	--	-	-
Input Voltage [V]	Efficiency Load 50% [%]	Efficiency Load 100% [%]																															
195	90.9	90.9																															
200	91.2	91.1																															
240	90.5	91.1																															
280	89.5	90.5																															
320	88.4	89.9																															
360	87.2	89.1																															
400	86.0	88.3																															
420	85.4	87.8																															
--	-	-																															
<p>Note: Slanted line shows the range of the rated input voltage.</p>																																	

**COSEL**

Model	SNDHS250B48	Temperature Testing Circuitry	25°C Figure A																																																			
Item	Efficiency (by Load Current)																																																					
Object	_____																																																					
1.Graph	<p>—▲— Input Volt. 200V        - - □ - - Input Volt. 280V        - - ○ - - Input Volt. 400V</p> <table border="1"> <caption>Data points estimated from Figure A</caption> <thead> <tr> <th>Load Current [A]</th> <th>Efficiency [200V] [%]</th> <th>Efficiency [280V] [%]</th> <th>Efficiency [400V] [%]</th> </tr> </thead> <tbody> <tr><td>1.0</td><td>87.3</td><td>87.5</td><td>79.7</td></tr> <tr><td>2.0</td><td>90.5</td><td>88.4</td><td>84.6</td></tr> <tr><td>3.0</td><td>91.4</td><td>89.9</td><td>86.7</td></tr> <tr><td>4.0</td><td>91.4</td><td>90.5</td><td>87.7</td></tr> <tr><td>5.2</td><td>91.2</td><td>90.6</td><td>88.3</td></tr> <tr><td>5.7</td><td>91.0</td><td>90.5</td><td>88.3</td></tr> </tbody> </table>			Load Current [A]	Efficiency [200V] [%]	Efficiency [280V] [%]	Efficiency [400V] [%]	1.0	87.3	87.5	79.7	2.0	90.5	88.4	84.6	3.0	91.4	89.9	86.7	4.0	91.4	90.5	87.7	5.2	91.2	90.6	88.3	5.7	91.0	90.5	88.3																							
Load Current [A]	Efficiency [200V] [%]	Efficiency [280V] [%]	Efficiency [400V] [%]																																																			
1.0	87.3	87.5	79.7																																																			
2.0	90.5	88.4	84.6																																																			
3.0	91.4	89.9	86.7																																																			
4.0	91.4	90.5	87.7																																																			
5.2	91.2	90.6	88.3																																																			
5.7	91.0	90.5	88.3																																																			
2.Values	<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Efficiency [%]</th> </tr> <tr> <th>Input Volt. 200[V]</th> <th>Input Volt. 280[V]</th> <th>Input Volt. 400[V]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>1.0</td><td>87.3</td><td>87.5</td><td>79.7</td></tr> <tr><td>2.0</td><td>90.5</td><td>88.4</td><td>84.6</td></tr> <tr><td>3.0</td><td>91.4</td><td>89.9</td><td>86.7</td></tr> <tr><td>4.0</td><td>91.4</td><td>90.5</td><td>87.7</td></tr> <tr><td>5.2</td><td>91.2</td><td>90.6</td><td>88.3</td></tr> <tr><td>5.7</td><td>91.0</td><td>90.5</td><td>88.3</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>			Load Current [A]	Efficiency [%]			Input Volt. 200[V]	Input Volt. 280[V]	Input Volt. 400[V]	0.0	-	-	-	1.0	87.3	87.5	79.7	2.0	90.5	88.4	84.6	3.0	91.4	89.9	86.7	4.0	91.4	90.5	87.7	5.2	91.2	90.6	88.3	5.7	91.0	90.5	88.3	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-
Load Current [A]	Efficiency [%]																																																					
	Input Volt. 200[V]	Input Volt. 280[V]	Input Volt. 400[V]																																																			
0.0	-	-	-																																																			
1.0	87.3	87.5	79.7																																																			
2.0	90.5	88.4	84.6																																																			
3.0	91.4	89.9	86.7																																																			
4.0	91.4	90.5	87.7																																																			
5.2	91.2	90.6	88.3																																																			
5.7	91.0	90.5	88.3																																																			
--	-	-	-																																																			
--	-	-	-																																																			
--	-	-	-																																																			
--	-	-	-																																																			
Note: Slanted line shows the range of the rated load current.																																																						

**COSEL**

Model SNDHS250B48


Item Line Regulation

Object +48V5.2A

Temperature 25°C  
Testing Circuitry Figure A

## 1. Graph

---□--- Load 50%  
 —△— Load 100%

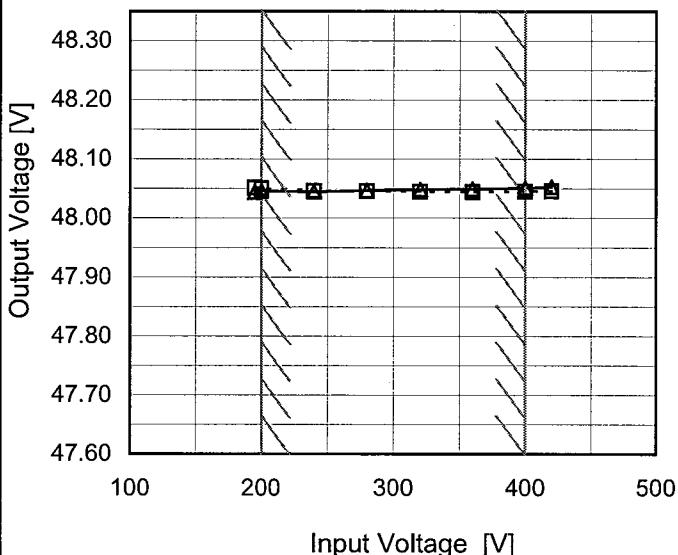


## 2. Values

Input Voltage [V]	Output Voltage [V]	
	Load 50%	Load 100%
195	48.051	48.044
200	48.050	48.046
240	48.046	48.045
280	48.046	48.047
320	48.045	48.049
360	48.045	48.050
400	48.045	48.051
420	48.046	48.053
--	-	-

Note: Slanted line shows the range of the rated input voltage.

**COSEL**

Model	SNDHS250B48	Temperature Testing Circuitry	25°C Figure A																																																			
Item	Load Regulation																																																					
Object	+48V5.2A																																																					
1.Graph	<p>—△— Input Volt. 200V        - - -□--- Input Volt. 280V        - · -○--- Input Volt. 400V</p> <p>Output Voltage [V]</p> <p>Load Current [A]</p>																																																					
2.Values	<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Output Voltage [V]</th> </tr> <tr> <th>Input Volt. 200[V]</th> <th>Input Volt. 280[V]</th> <th>Input Volt. 400[V]</th> </tr> </thead> <tbody> <tr> <td>0.0</td><td>48.032</td><td>48.039</td><td>48.047</td></tr> <tr> <td>1.0</td><td>48.033</td><td>48.039</td><td>48.047</td></tr> <tr> <td>2.0</td><td>48.033</td><td>48.039</td><td>48.046</td></tr> <tr> <td>3.0</td><td>48.034</td><td>48.040</td><td>48.047</td></tr> <tr> <td>4.0</td><td>48.035</td><td>48.041</td><td>48.048</td></tr> <tr> <td>5.2</td><td>48.036</td><td>48.043</td><td>48.050</td></tr> <tr> <td>5.7</td><td>48.038</td><td>48.045</td><td>48.053</td></tr> <tr> <td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr> <td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr> <td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr> <td>--</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>			Load Current [A]	Output Voltage [V]			Input Volt. 200[V]	Input Volt. 280[V]	Input Volt. 400[V]	0.0	48.032	48.039	48.047	1.0	48.033	48.039	48.047	2.0	48.033	48.039	48.046	3.0	48.034	48.040	48.047	4.0	48.035	48.041	48.048	5.2	48.036	48.043	48.050	5.7	48.038	48.045	48.053	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-
Load Current [A]	Output Voltage [V]																																																					
	Input Volt. 200[V]	Input Volt. 280[V]	Input Volt. 400[V]																																																			
0.0	48.032	48.039	48.047																																																			
1.0	48.033	48.039	48.047																																																			
2.0	48.033	48.039	48.046																																																			
3.0	48.034	48.040	48.047																																																			
4.0	48.035	48.041	48.048																																																			
5.2	48.036	48.043	48.050																																																			
5.7	48.038	48.045	48.053																																																			
--	-	-	-																																																			
--	-	-	-																																																			
--	-	-	-																																																			
--	-	-	-																																																			
Note:	Slanted line shows the range of the rated load current.																																																					

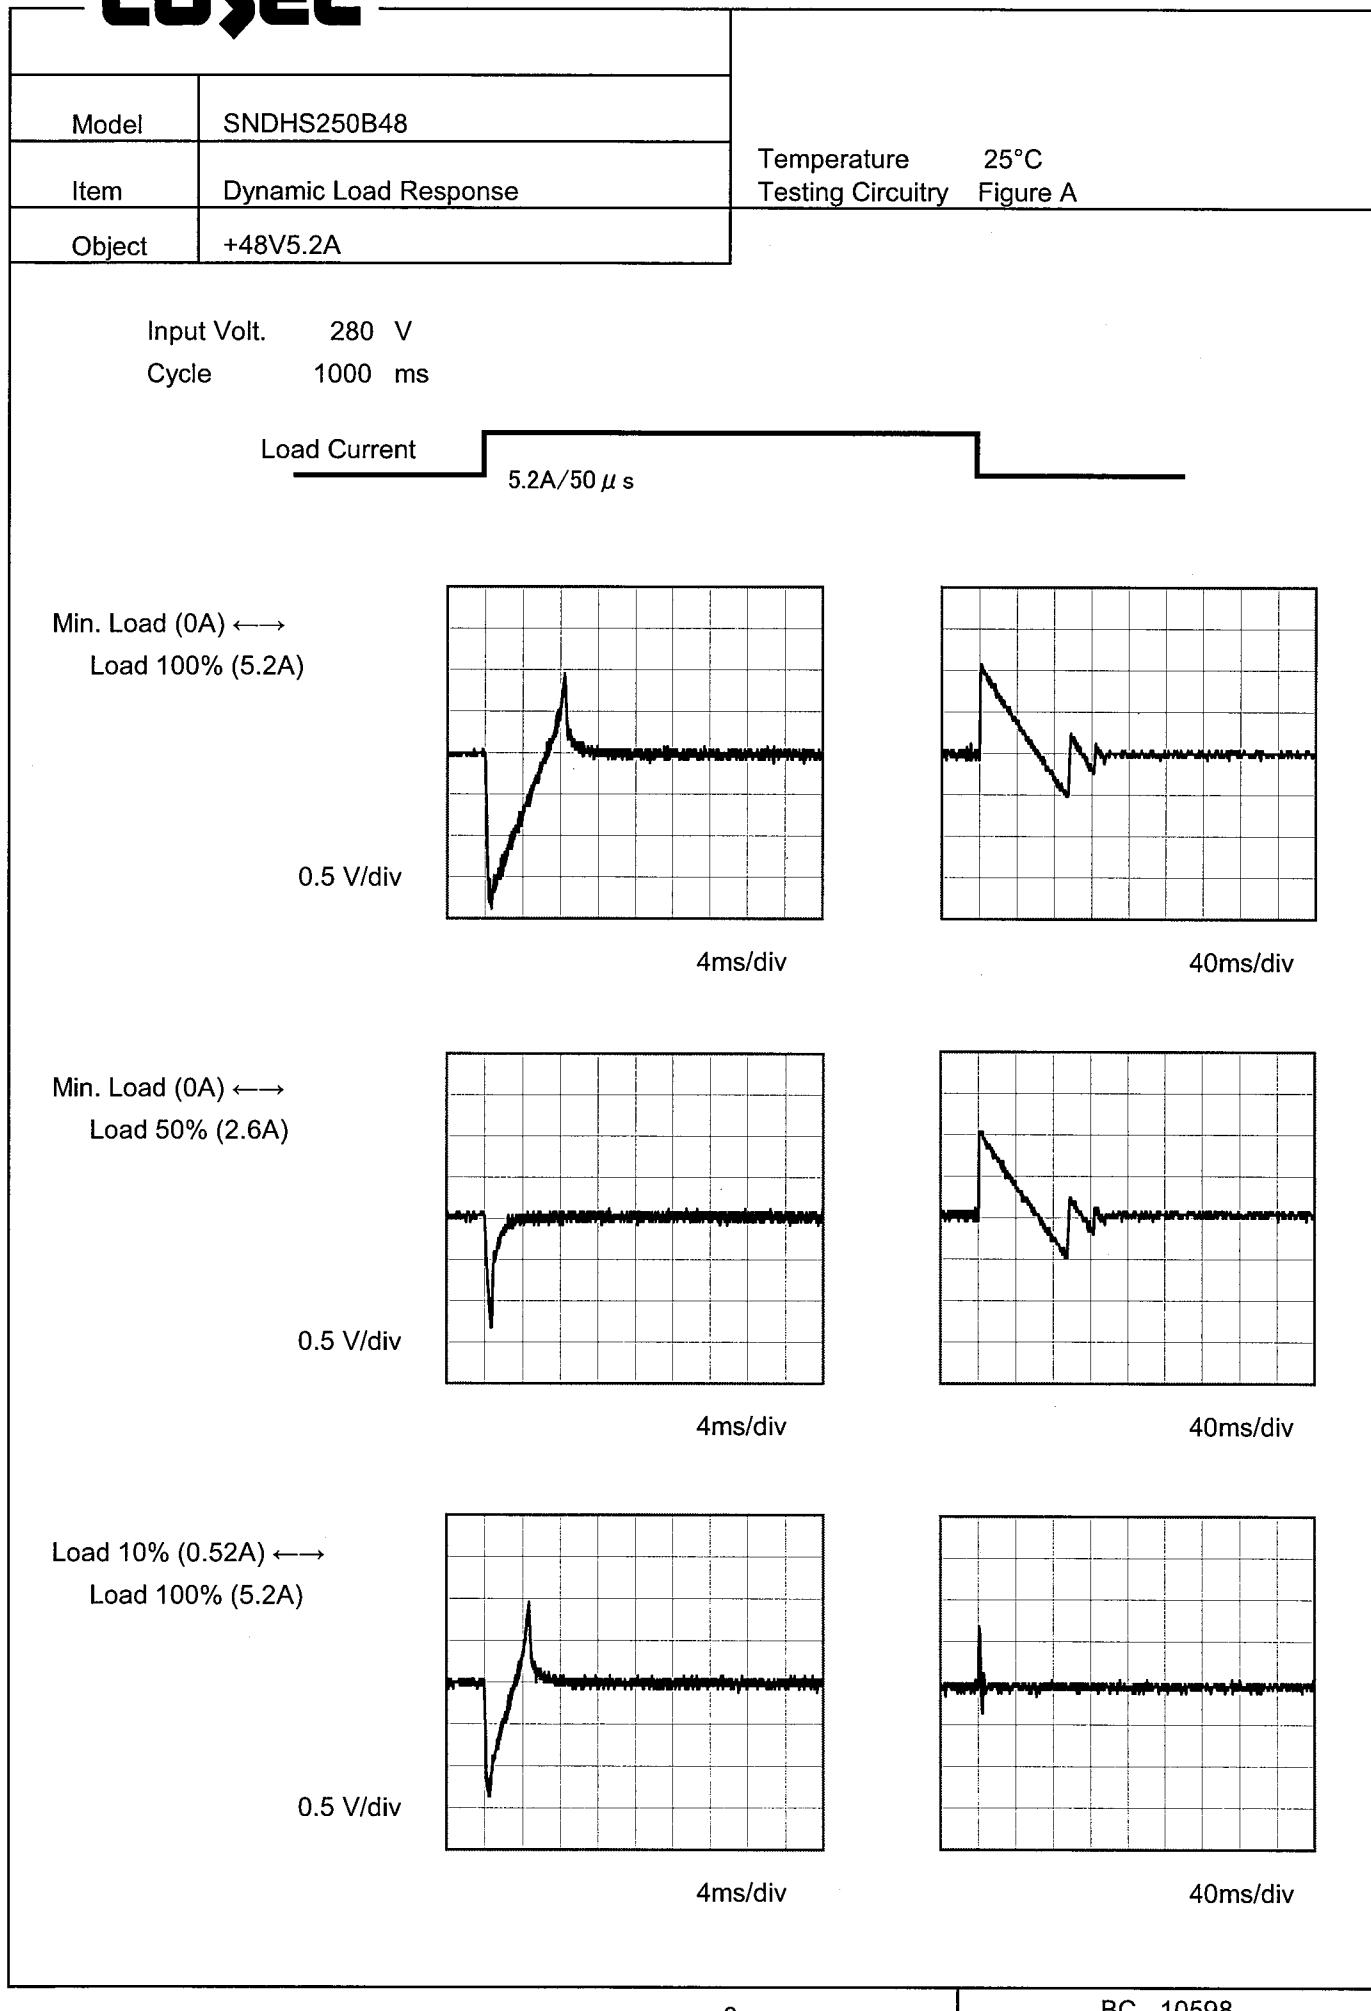**COSEL**

**COSEL**


Model	SNDHS250B48	Temperature Testing Circuitry	25°C Figure B																																					
Item	Ripple Voltage (by Load Current)																																							
Object	+48V5.2A																																							
1.Graph			2.Values																																					
<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="2">Ripple Voltage [mV]</th> </tr> <tr> <th>Input Volt. 200 [V]</th> <th>Input Volt. 400 [V]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>10</td><td>10</td></tr> <tr><td>1.0</td><td>80</td><td>105</td></tr> <tr><td>2.0</td><td>80</td><td>130</td></tr> <tr><td>3.0</td><td>80</td><td>130</td></tr> <tr><td>4.0</td><td>80</td><td>130</td></tr> <tr><td>5.2</td><td>75</td><td>130</td></tr> <tr><td>5.7</td><td>75</td><td>130</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> </tbody> </table>			Load Current [A]	Ripple Voltage [mV]		Input Volt. 200 [V]	Input Volt. 400 [V]	0.0	10	10	1.0	80	105	2.0	80	130	3.0	80	130	4.0	80	130	5.2	75	130	5.7	75	130	--	-	-	--	-	-	--	-	-	--	-	-
Load Current [A]	Ripple Voltage [mV]																																							
	Input Volt. 200 [V]	Input Volt. 400 [V]																																						
0.0	10	10																																						
1.0	80	105																																						
2.0	80	130																																						
3.0	80	130																																						
4.0	80	130																																						
5.2	75	130																																						
5.7	75	130																																						
--	-	-																																						
--	-	-																																						
--	-	-																																						
--	-	-																																						
<p>Measured by 100 MHz Oscilloscope.      Ripple Voltage is shown as p-p in the figure below.      Note: Slanted line shows the range of the rated load current.</p>																																								
<p>Ripple [mVp-p]</p>																																								
<p>Fig.Complex Ripple Wave Form</p>																																								

**COSEL**

Model	SNDHS250B48
Item	Ripple-Noise
Object	+48V5.2A

Temperature 25°C  
Testing Circuitry Figure B

## 1. Graph

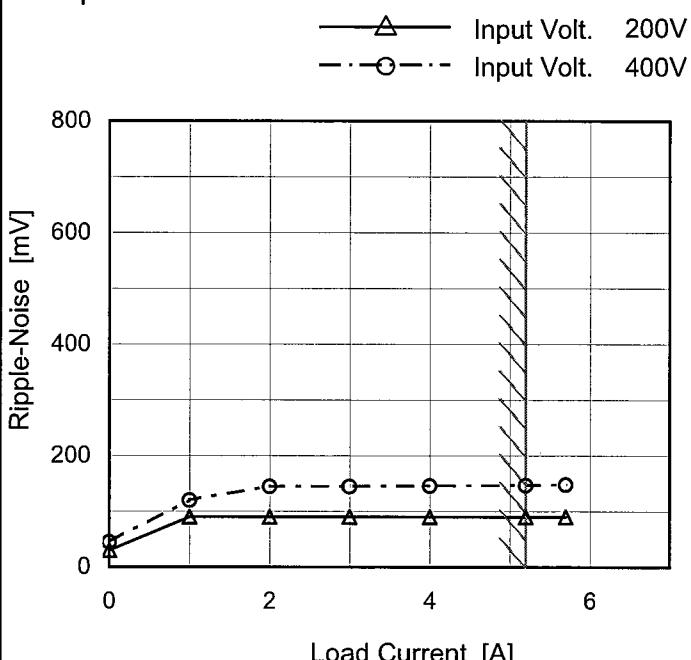

Measured by 100 MHz Oscilloscope.

Ripple-Noise is shown as p-p in the figure below:

Note: Slanted line shows the range of the rated load current.

## 2. Values

Load Current [A]	Ripple-Noise [mV]	
	Input Volt. 200 [V]	Input Volt. 400 [V]
0.0	30	45
1.0	90	120
2.0	90	145
3.0	90	145
4.0	90	146
5.2	90	147
5.7	90	148
--	-	-
--	-	-
--	-	-
--	-	-


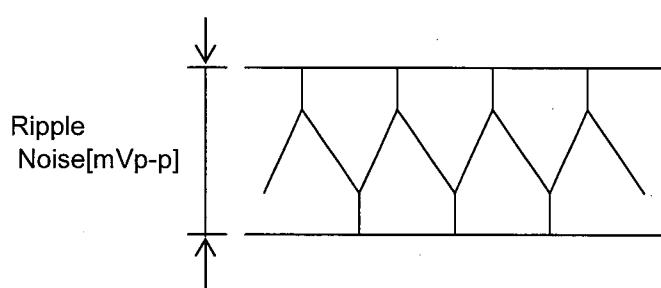


Fig.Complex Ripple Noise Wave Form

**COSEL**

Model	SNDHS250B48
Item	Ripple Voltage (by Ambient Temp.)
Object	+48V5.2A

## 1. Graph

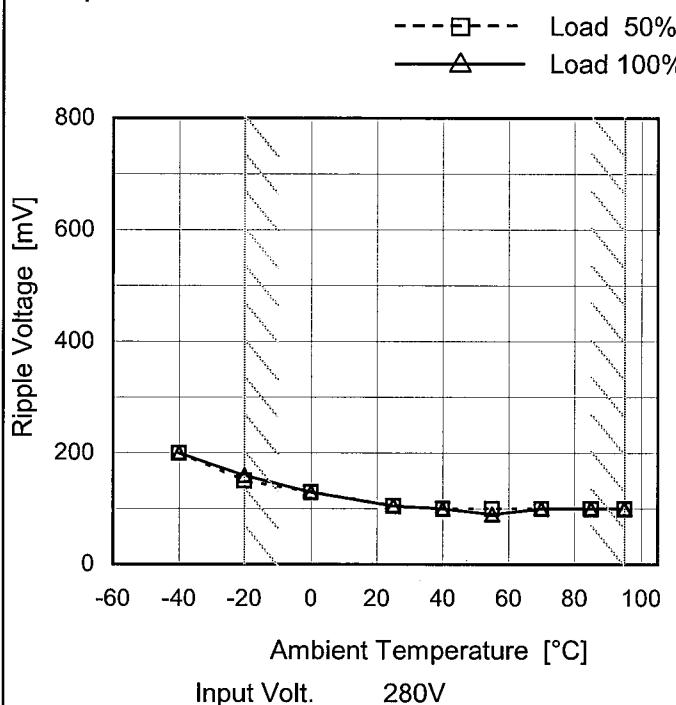

Measured by 100 MHz Oscilloscope.

Note: Slanted line shows the range of the rated ambient temperature.


Testing Circuitry Figure B

## 2. Values

Ambient Temperature [°C]	Ripple Voltage [mV]	
	Load 50%	Load 100%
-40	200	200
-20	150	160
0	130	130
25	105	105
40	100	100
55	100	90
70	100	100
85	100	100
95	100	100
--	-	-
--	-	-

**COSEL**

Model	SNDHS250B48
Item	Ambient Temperature Drift
Object	+48V5.2A

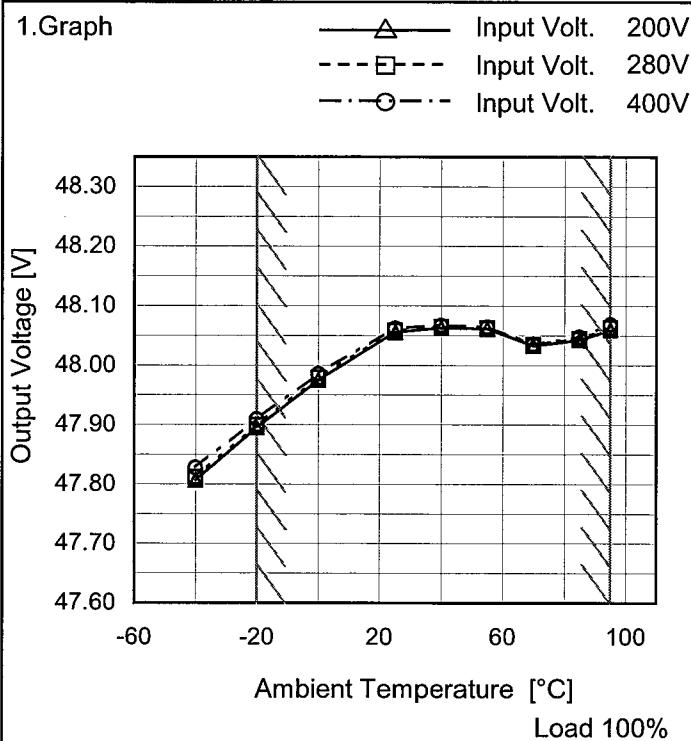

Note: Slanted line shows the range of the rated ambient temperature.

Testing Circuitry Figure A

## 2.Values

Ambient Temperature [°C]	Output Voltage [V]		
	Input Volt. 200[V]	Input Volt. 280[V]	Input Volt. 400[V]
-40	47.807	47.812	47.828
-20	47.896	47.899	47.909
0	47.976	47.979	47.986
25	48.056	48.059	48.062
40	48.063	48.065	48.067
55	48.062	48.063	48.064
70	48.033	48.035	48.036
85	48.043	48.044	48.048
95	48.060	48.063	48.069
--	-	-	-
--	-	-	-



Model	SNDHS250B48	Testing Circuitry Figure A
Item	Output Voltage Accuracy	
Object	+48V5.2A	

### 1. Output Voltage Accuracy

This is defined as the value of the output voltage, regulation load, ambient temperature and input voltage varied at random in the range as specified below.

Temperature : -20 - 95°C

Input Voltage : 200 - 400V

Load Current : 0 - 5.2A

\* Output Voltage Accuracy =  $\pm(\text{Maximum of Output Voltage} - \text{Minimum of Output Voltage}) / 2$

$$\text{* Output Voltage Accuracy (Ration)} = \frac{\text{Output Voltage Accuracy}}{\text{Rated Output Voltage}} \times 100$$

### 2. Values


Item	Temperature [°C]	Input Voltage[V]	Output		Output Voltage Accuracy	
			Current[A]	Voltage[V]	Value [mV]	Ration [%]
Maximum Voltage	95	400	0	48.075	$\pm 90$	$\pm 0.2$
Minimum Voltage	-20	200	5.2	47.896		

**COSEL**

Model	SNDHS250B48
Item	Time Lapse Drift
Object	+48V5.2A

Temperature 25°C  
Testing Circuitry Figure A

## 1.Graph

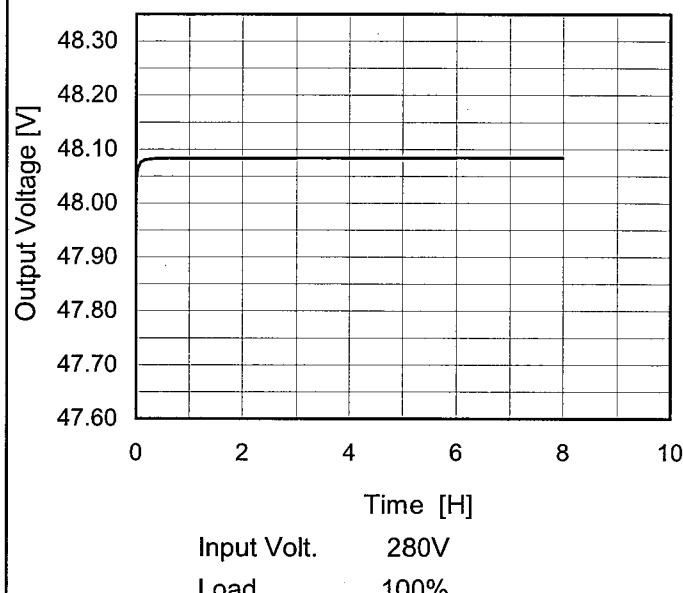

## 2.Values

Time since start [H]	Output Voltage [V]
0.0	48.040
0.5	48.083
1.0	48.083
2.0	48.083
3.0	48.084
4.0	48.084
5.0	48.084
6.0	48.084
7.0	48.085
8.0	48.084

**COSEL**


Model SNDHS250B48

Item Rise and Fall Time

Object +48V5.2A


Temperature 25°C  
Testing Circuitry Figure A

## 1. Graph

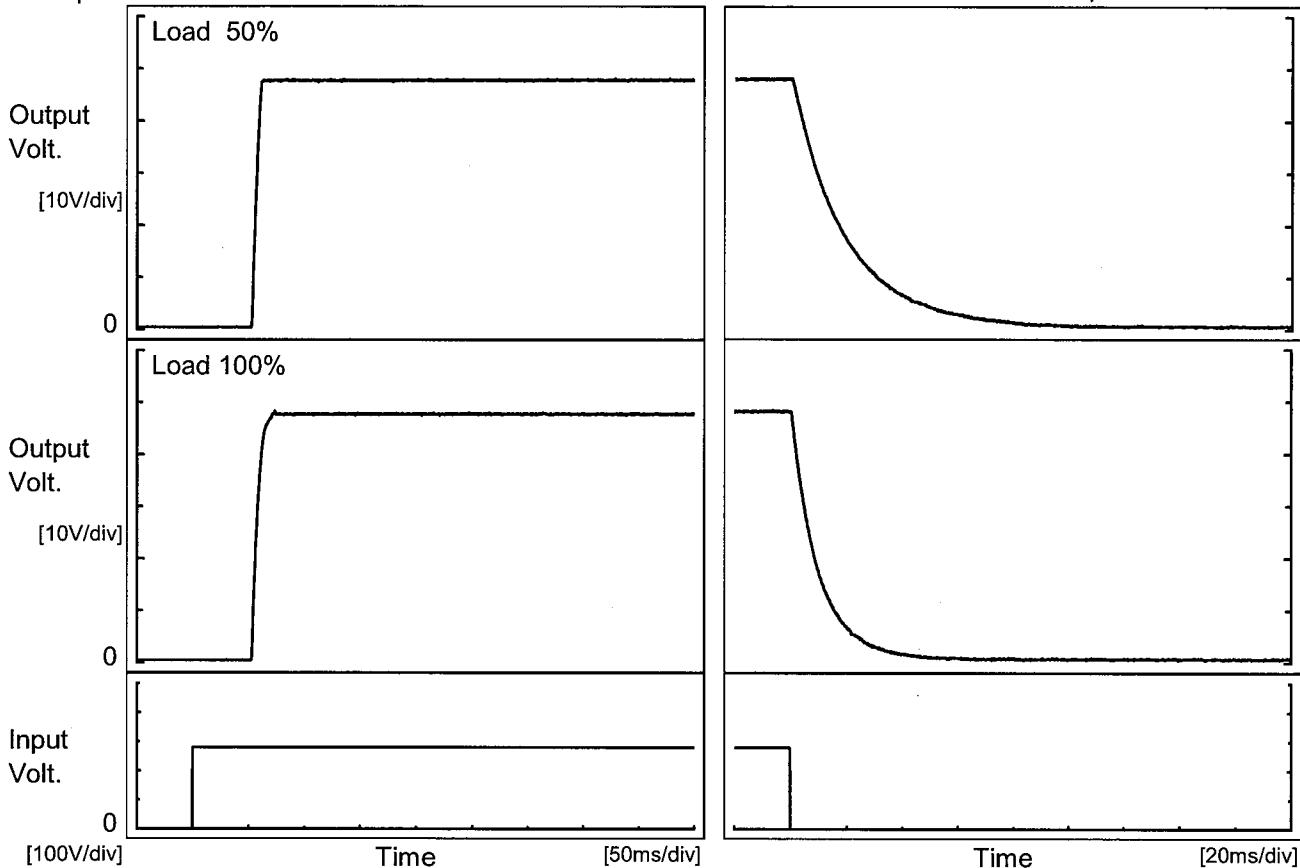

## 2. Values

Load	Time	Td	Tr	Ts	Th	Tf	[ms]
50 %		53.5	6.8	60.3	2.4	43.8	
100 %		53.5	10.0	63.5	1.2	22.4	

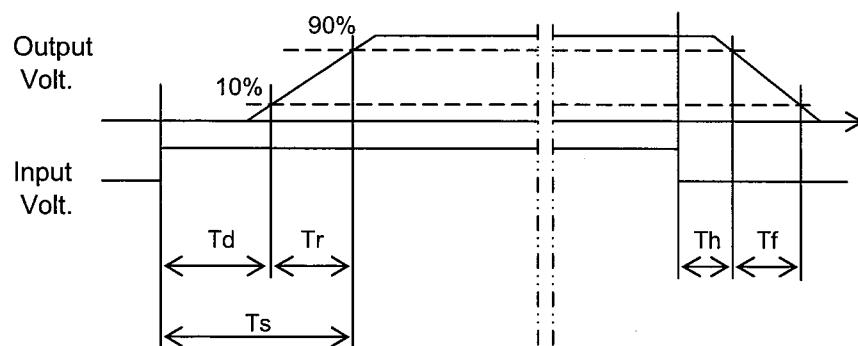

**COSEL**

Model	SNDHS250B48	Testing Circuitry Figure A																																							
Item	Minimum Input Voltage for Regulated Output Voltage																																								
Object	+48V5.2A																																								
1.Graph		2.Values																																							
<p>Input Voltage [V]</p> <p>Ambient Temperature [°C]</p> <p>Load 50%</p> <p>Load 100%</p>																																									
<p>Note: Slanted line shows the range of the rated ambient temperature.</p>																																									
		<table border="1"> <thead> <tr> <th rowspan="2">Ambient Temperature [°C]</th> <th colspan="2">Input Voltage [V]</th> </tr> <tr> <th>Load 50%</th> <th>Load 100%</th> </tr> </thead> <tbody> <tr> <td>-40</td><td>174</td><td>177</td> </tr> <tr> <td>-20</td><td>174</td><td>177</td> </tr> <tr> <td>0</td><td>173</td><td>178</td> </tr> <tr> <td>25</td><td>173</td><td>178</td> </tr> <tr> <td>40</td><td>173</td><td>178</td> </tr> <tr> <td>55</td><td>173</td><td>178</td> </tr> <tr> <td>70</td><td>173</td><td>179</td> </tr> <tr> <td>85</td><td>173</td><td>179</td> </tr> <tr> <td>95</td><td>173</td><td>179</td> </tr> <tr> <td>--</td><td>-</td><td>-</td> </tr> <tr> <td>--</td><td>-</td><td>-</td> </tr> </tbody> </table>	Ambient Temperature [°C]	Input Voltage [V]		Load 50%	Load 100%	-40	174	177	-20	174	177	0	173	178	25	173	178	40	173	178	55	173	178	70	173	179	85	173	179	95	173	179	--	-	-	--	-	-	
Ambient Temperature [°C]	Input Voltage [V]																																								
	Load 50%	Load 100%																																							
-40	174	177																																							
-20	174	177																																							
0	173	178																																							
25	173	178																																							
40	173	178																																							
55	173	178																																							
70	173	179																																							
85	173	179																																							
95	173	179																																							
--	-	-																																							
--	-	-																																							




Model SNDHS250B48

Item Overcurrent Protection

Object +48V5.2A

1. Graph

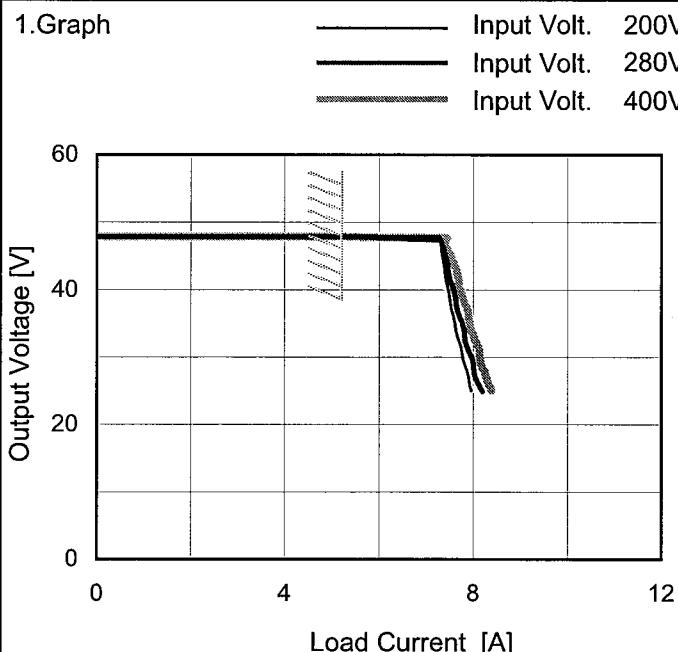

Note: Slanted line shows the range of the rated load current.

Intermittent operation occurs when the output voltage is from 25V to 0V.

Temperature 25°C  
Testing Circuitry Figure A

2. Values

Output Voltage [V]	Load Current [A]		
	Input Volt. 200[V]	Input Volt. 280[V]	Input Volt. 400[V]
45.6	7.48	7.52	7.63
43.2	7.53	7.60	7.77
38.4	7.65	7.76	7.93
33.6	7.78	7.95	8.14
28.8	7.96	8.15	8.30
--	-	-	-
--	-	-	-
--	-	-	-
--	-	-	-
--	-	-	-
--	-	-	-
--	-	-	-
--	-	-	-


**COSEL**

Model SNDHS250B48

Item Overvoltage Protection

Object +48V5.2A

## 1. Graph

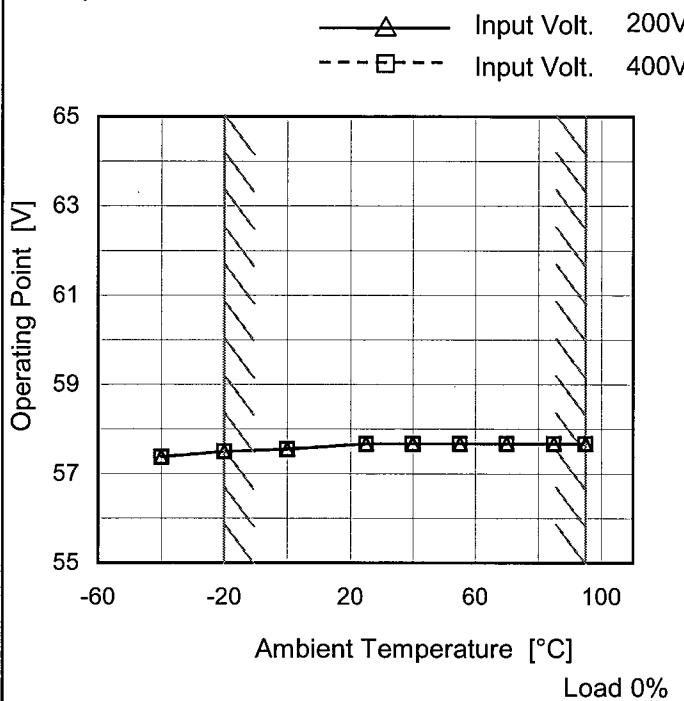

Note: Slanted line shows the range of the rated ambient temperature.

Testing Circuitry Figure A

## 2. Values

Ambient Temperature [°C]	Operating Point [V]	
	Input Volt. 200[V]	Input Volt. 400[V]
-40	57.38	57.38
-20	57.50	57.50
0	57.55	57.55
25	57.67	57.67
40	57.67	57.67
55	57.67	57.67
70	57.67	57.67
85	57.67	57.67
95	57.67	57.67
--	-	-
--	-	-

COSEL

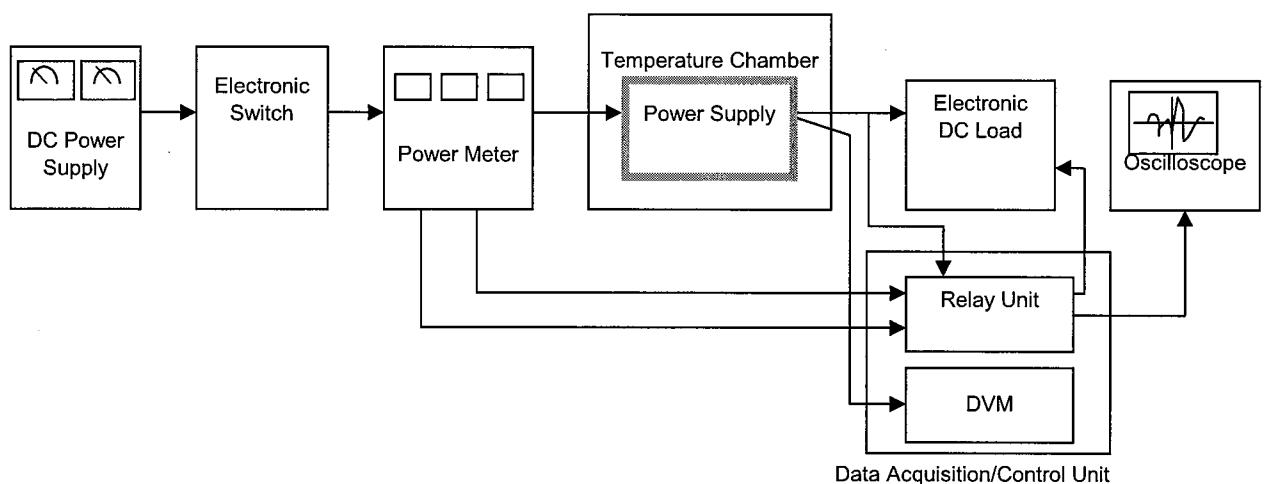


Figure A

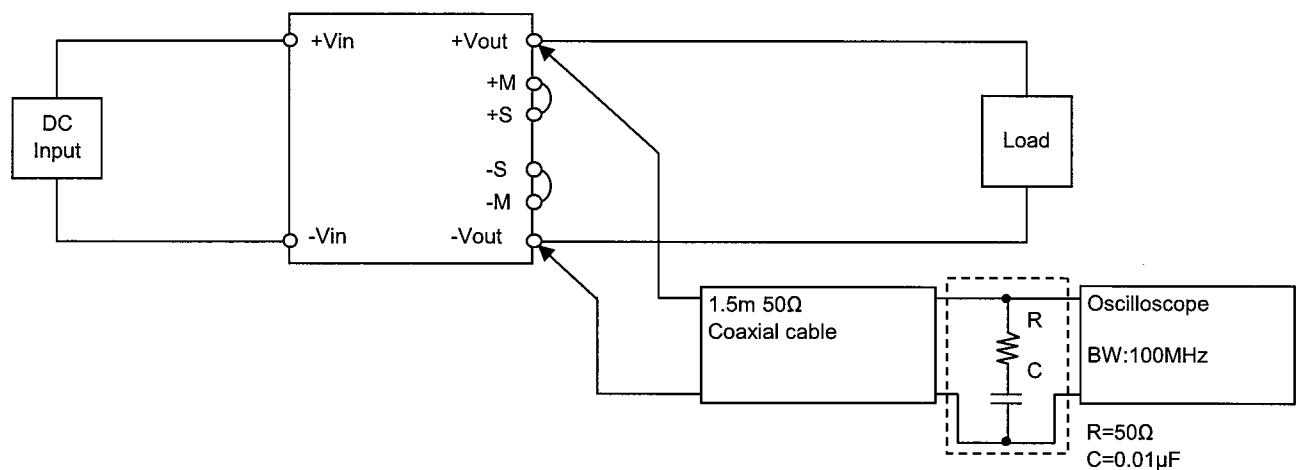


Figure B (Ripple and Ripple noise Characteristic)