


SNDHS50A series EMI/EMS Test resultApproved : Takahiro Yoneda
Takahiro YonedaPrepared : Tadashi Arai
Tadashi Arai


No.	Test item	Conditions	Conditions of Acceptability	Result
1	Line conduction	(1) Rated input DC110V (2) Rated load (3) Ambient temp. 25±10°C	(1)Meets the undermentioned standard. FCC Part15 classA , VCCI classA CISPR22 classA , EN55022-A EN55011-A	ok
2	Radiated emission	(1) Rated input DC110V (2) Rated load (3) Ambient temp. 25±10°C	(1)Meets the undermentioned standard. FCC Part15 classA , VCCI classA CISPR22 classA , EN55022-A EN55011-A	ok
3	Static electricity immunity test (EN61000-4-2)	(1) Rated input DC110V (2) Rated load (3) Ambient temp. 25±10°C (4) Contact discharge voltage 8[kV] (EN61000-4-2 Level 4)	(1)No protection circuit failure. (2)No output voltage drop with control circuit failure. (3)No any other function failure	ok
4	Radiated, radio-frequency, electromagnetic field immunity test (EN61000-4-3)	(1) Rated input DC110V (2) Rated load (3) Ambient temp. 25±10°C (4) Testing field strength (Level 3) ① 10[V/m] (80MHz to 1.0GHz) ② 3[V/m] (1.4GHz to 2.0GHz) ③ 1[V/m] (2.0GHz to 2.7GHz)	(1)No protection circuit failure. (2)No output voltage drop with control circuit failure. (3)No any other function failure	ok
5	Electrical fast transient/ burst immunity test (EN61000-4-4)	(1) Rated input (DC110V/AC90V) (2) Rated load (3) Ambient temp. 25±10°C (4) Test peak voltage 2[kV] (Level 3) (5) Testing circuitry Fig.2	(1)No protection circuit failure. (2)No output voltage drop with control circuit failure. (3)No any other function failure	ok
6	Surge immunity test (EN61000-4-5)	(1) Rated input (DC110V/AC90V) (2) Rated load (3) Ambient temp. 25±10°C (4)-1 Test voltage Line to line 2[kV] (Level 3) Line to earth 4[kV] (Level 4) Testing circuitry Fig.1 (4)-2 Test voltage Line to line 2[kV] (Level 3) Line to earth 2[kV] (Level 3) Testing circuitry Fig.2	(1)The power supply is not stop (2)Circuit does not malfunction. (3)No abnormality of the insulation destruction etc. (4)Parts are no damaged.	ok
7	Immunity to conducted disturbances, induced by radio-frequency fields (EN61000-4-6)	(1) Rated input DC110V (2) Rated load (3) Ambient temp. 25±10°C (4) Voltage level (e.m.f.) 10[V] (Level 3)	(1)No protection circuit failure. (2)No output voltage drop with control circuit failure. (3)No any other function failure	ok

COSEL

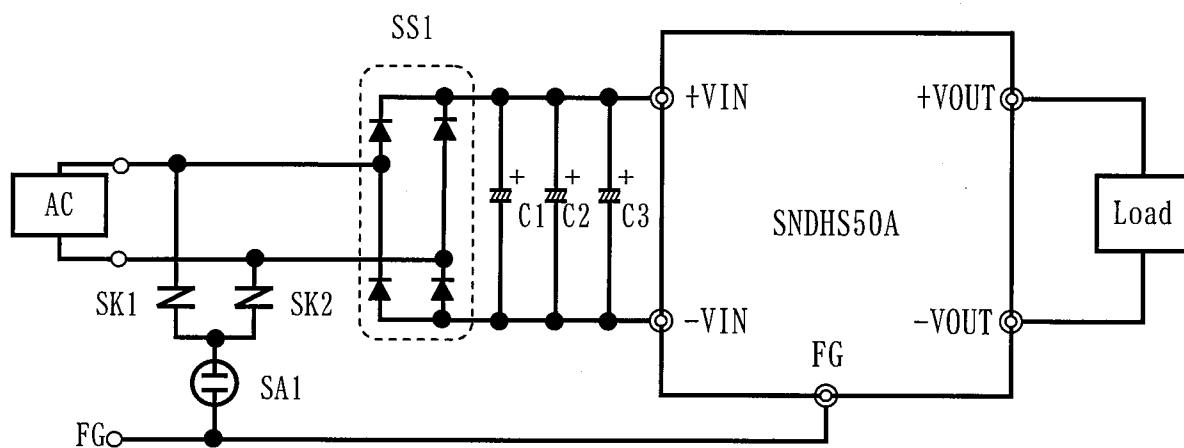

SS1 : D10XB60 (SHINDENGEN)
 C1, C2, C3 : 100uF
 SA1 : DSA-302MA (MITSUBISHI MATERIALS CORP.)
 SK1, SK2 : TND14V-471K (NIPPON CHEMI-CON)

Fig.1 Testing circuitry

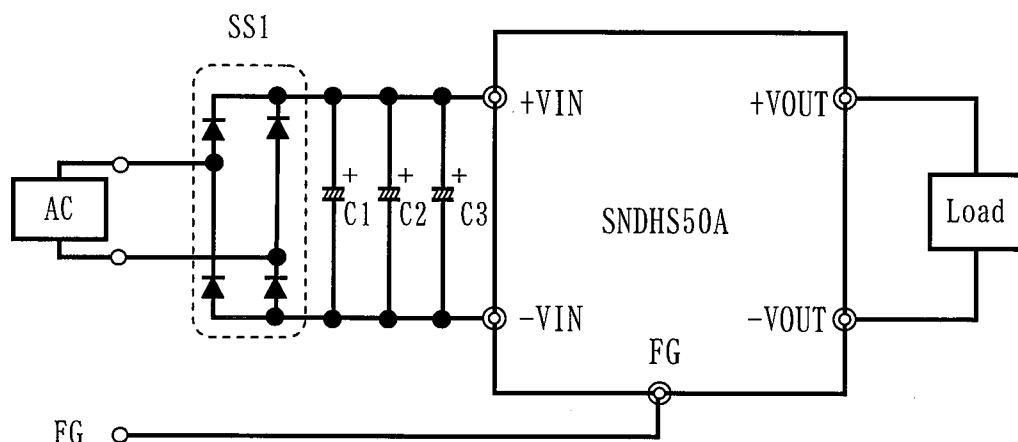

SS1 : D10XB60 (SHINDENGEN)
 C1, C2, C3 : 100uF

Fig.2 Testing circuitry