

TEST DATA OF SUS6053R3 SUCS6053R3

Regulated DC Power Supply
Feb 22, 2005

Approved by : Tetsuo Sugimori
Tetsuo Sugimori Design Manager

Prepared by : Yoshikazu Mizuno
Yoshikazu Mizuno Design Engineer

COSEL CO.,LTD.



CONTENTS

1. Input Current (by Input Voltage)	1
2. Input Current (by Load Current)	2
3. Input Power (by Load Current)	3
4. Efficiency (by Input Voltage)	4
5. Efficiency (by Load Current)	5
6. Line Regulation	6
7. Load Regulation	7
8. Dynamic Load Response	8
9. Ripple Voltage (by Load Current)	9
10. Ripple-Noise	10
11. Ripple Voltage (by Ambient Temperature)	11
12. Ambient Temperature Drift	12
13. Output Voltage Accuracy	13
14. Time Lapse Drift	14
15. Rise and Fall Time	15
16. Minimum Input Voltage for Regulated Output Voltage	16
17. Overcurrent Protection	17
18. Figure of Testing Circuitry	18


(Final Page 18)

COSEL

Model	SUS6053R3/SUCS6053R3
Item	Input Current (by Input Voltage)
Object	_____

1.Graph

—△— Load 100%
 - - -□- Load 50%
 - -○- Load 0%

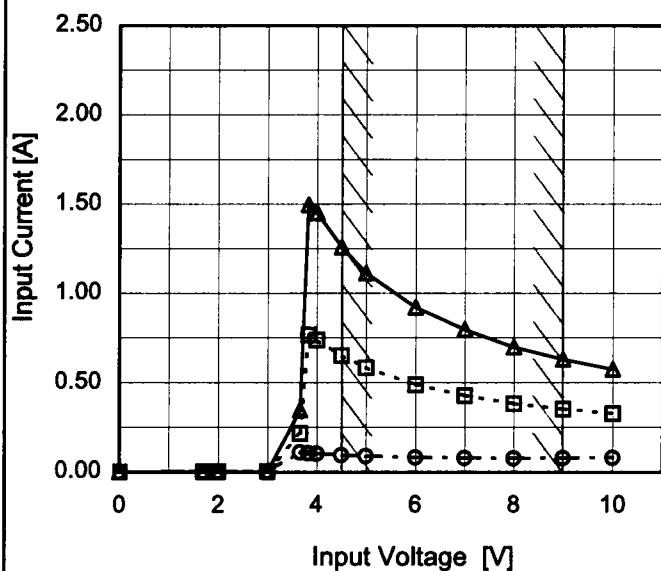

Note: Slanted line shows the range of the rated input voltage.

 Temperature 25°C
 Testing Circuitry Figure A

2.Values

Input Voltage [V]	Input Current [A]		
	Load 0%	Load 50%	Load 100%
0.00	0.000	0.000	0.000
1.70	0.002	0.001	0.001
2.00	0.002	0.001	0.001
3.00	0.003	0.003	0.003
3.66	0.109	0.216	0.346
3.83	0.105	0.766	1.496
4.00	0.102	0.738	1.452
4.50	0.094	0.653	1.259
5.00	0.088	0.585	1.113
6.00	0.081	0.489	0.922
7.00	0.078	0.428	0.798
8.00	0.076	0.383	0.699
9.00	0.077	0.351	0.630
10.00	0.078	0.326	0.574
--	-	-	-
--	-	-	-

COSEL


Model	SUS6053R3/SUCS6053R3																																																			
Item	Input Current (by Load Current)	Temperature 25°C Testing Circuitry Figure A																																																		
Object	_____																																																			
1.Graph																																																				
		2.Values																																																		
<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Input Current [A]</th> </tr> <tr> <th>Input Volt. 4.5[V]</th> <th>Input Volt. 5[V]</th> <th>Input Volt. 9[V]</th> </tr> </thead> <tbody> <tr> <td>0.00</td><td>0.092</td><td>0.086</td><td>0.076</td></tr> <tr> <td>0.20</td><td>0.273</td><td>0.248</td><td>0.170</td></tr> <tr> <td>0.40</td><td>0.459</td><td>0.413</td><td>0.260</td></tr> <tr> <td>0.60</td><td>0.660</td><td>0.588</td><td>0.349</td></tr> <tr> <td>0.80</td><td>0.849</td><td>0.770</td><td>0.440</td></tr> <tr> <td>1.00</td><td>1.051</td><td>0.961</td><td>0.534</td></tr> <tr> <td>1.20</td><td>1.273</td><td>1.125</td><td>0.628</td></tr> <tr> <td>1.32</td><td>1.405</td><td>1.243</td><td>0.685</td></tr> <tr> <td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr> <td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr> <td>--</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>		Load Current [A]	Input Current [A]			Input Volt. 4.5[V]	Input Volt. 5[V]	Input Volt. 9[V]	0.00	0.092	0.086	0.076	0.20	0.273	0.248	0.170	0.40	0.459	0.413	0.260	0.60	0.660	0.588	0.349	0.80	0.849	0.770	0.440	1.00	1.051	0.961	0.534	1.20	1.273	1.125	0.628	1.32	1.405	1.243	0.685	--	-	-	-	--	-	-	-	--	-	-	-
Load Current [A]	Input Current [A]																																																			
	Input Volt. 4.5[V]	Input Volt. 5[V]	Input Volt. 9[V]																																																	
0.00	0.092	0.086	0.076																																																	
0.20	0.273	0.248	0.170																																																	
0.40	0.459	0.413	0.260																																																	
0.60	0.660	0.588	0.349																																																	
0.80	0.849	0.770	0.440																																																	
1.00	1.051	0.961	0.534																																																	
1.20	1.273	1.125	0.628																																																	
1.32	1.405	1.243	0.685																																																	
--	-	-	-																																																	
--	-	-	-																																																	
--	-	-	-																																																	
<p>Note: Slanted line shows the range of the rated load current.</p>																																																				

COSEL

Model	SUS6053R3/SUCS6053R3																																																					
Item	Input Power (by Load Current)																																																					
Object	_____																																																					
1.Graph	<p>Legend:</p> <ul style="list-style-type: none"> Input Volt. 4.5V Input Volt. 5V Input Volt. 9V 																																																					
2.Values	<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Input Power [W]</th> </tr> <tr> <th>Input Volt. 4.5[V]</th> <th>Input Volt. 5[V]</th> <th>Input Volt. 9[V]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>0.42</td><td>0.43</td><td>0.70</td></tr> <tr><td>0.20</td><td>1.22</td><td>1.24</td><td>1.55</td></tr> <tr><td>0.40</td><td>2.04</td><td>2.05</td><td>2.36</td></tr> <tr><td>0.60</td><td>2.90</td><td>2.90</td><td>3.16</td></tr> <tr><td>0.80</td><td>3.78</td><td>3.77</td><td>3.98</td></tr> <tr><td>1.00</td><td>4.69</td><td>4.69</td><td>4.82</td></tr> <tr><td>1.20</td><td>5.64</td><td>5.58</td><td>5.67</td></tr> <tr><td>1.32</td><td>6.19</td><td>6.13</td><td>6.17</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>			Load Current [A]	Input Power [W]			Input Volt. 4.5[V]	Input Volt. 5[V]	Input Volt. 9[V]	0.00	0.42	0.43	0.70	0.20	1.22	1.24	1.55	0.40	2.04	2.05	2.36	0.60	2.90	2.90	3.16	0.80	3.78	3.77	3.98	1.00	4.69	4.69	4.82	1.20	5.64	5.58	5.67	1.32	6.19	6.13	6.17	--	-	-	-	--	-	-	-	--	-	-	-
Load Current [A]	Input Power [W]																																																					
	Input Volt. 4.5[V]	Input Volt. 5[V]	Input Volt. 9[V]																																																			
0.00	0.42	0.43	0.70																																																			
0.20	1.22	1.24	1.55																																																			
0.40	2.04	2.05	2.36																																																			
0.60	2.90	2.90	3.16																																																			
0.80	3.78	3.77	3.98																																																			
1.00	4.69	4.69	4.82																																																			
1.20	5.64	5.58	5.67																																																			
1.32	6.19	6.13	6.17																																																			
--	-	-	-																																																			
--	-	-	-																																																			
--	-	-	-																																																			
Note:	Slanted line shows the range of the rated load current.																																																					

COSEL
Model SUS6053R3/SUCS6053R3

Item Efficiency (by Input Voltage)

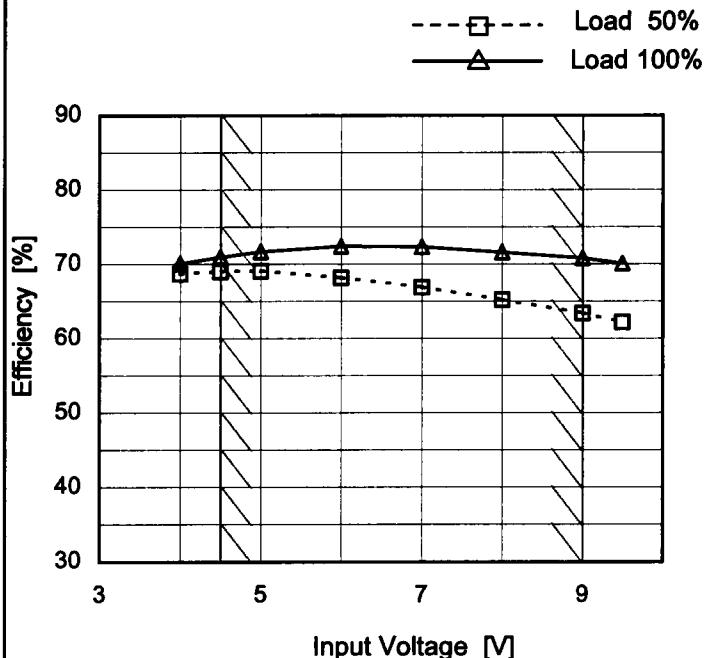
Object —————
1.Graph
Temperature 25°C
Testing Circuitry Figure A
2.Values

Input Voltage [V]	Efficiency [%]	
	Load 50%	Load 100%
4.0	68.7	70.1
4.5	69.0	71.0
5.0	69.1	71.7
6.0	68.2	72.4
7.0	66.9	72.3
8.0	65.2	71.6
9.0	63.4	70.8
9.5	62.2	70.1
--	-	-

Note: Slanted line shows the range of the rated input voltage.

COSEL

Model	SUS6053R3/SUCS6053R3
Item	Efficiency (by Load Current)
Object	_____

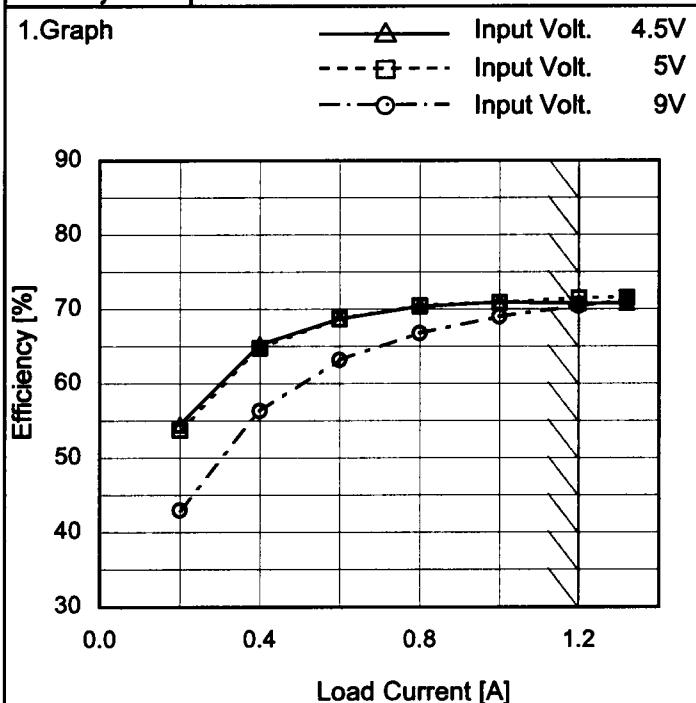

Temperature 25°C
Testing Circuitry Figure A

2. Values


Load Current [A]	Efficiency [%]		
	Input Volt. 4.5[V]	Input Volt. 5[V]	Input Volt. 9[V]
0.00	-	-	-
0.20	54.5	53.7	43.0
0.40	65.3	64.8	56.3
0.60	68.7	68.7	63.2
0.80	70.4	70.5	66.8
1.00	70.9	70.9	69.0
1.20	70.8	71.5	70.4
1.32	70.8	71.6	71.1
--	-	-	-
--	-	-	-
--	-	-	-

Note: Slanted line shows the range of the rated load current.

COSEL

Model	SUS6053R3/SUCS6053R3
Item	Line Regulation
Object	+3.3V1.2A

1. Graph

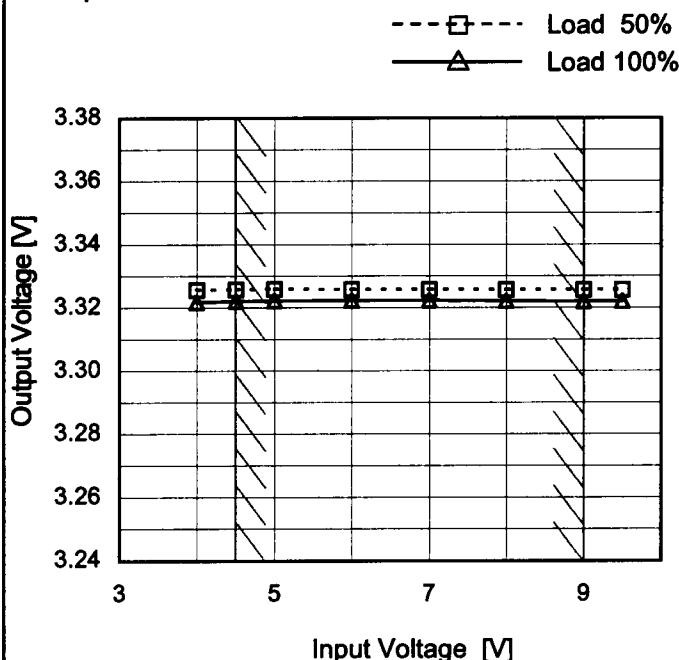


Note: Slanted line shows the range of the rated input voltage.

Temperature 25°C
Testing Circuitry Figure A


2. Values

Input Voltage [V]	Output Voltage [V]	
	Load 50%	Load 100%
4.0	3.326	3.322
4.5	3.326	3.322
5.0	3.326	3.322
6.0	3.326	3.322
7.0	3.326	3.322
8.0	3.326	3.322
9.0	3.326	3.322
9.5	3.326	3.322
--	-	-

COSEL

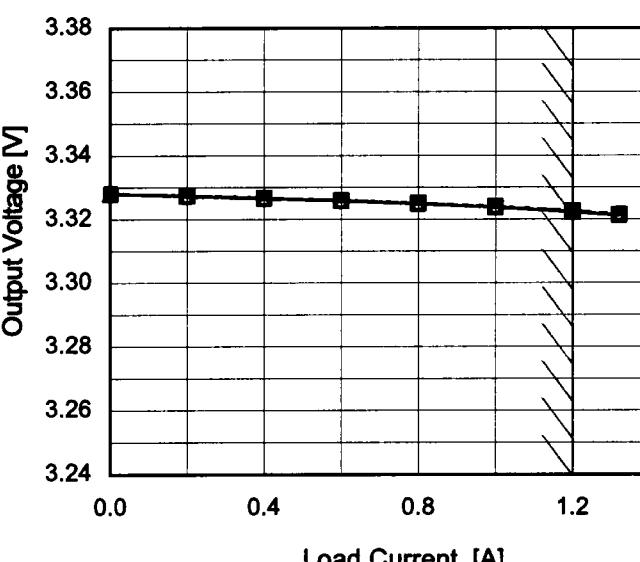Model	SUS6053R3/SUCS6053R3	Temperature Testing Circuitry 25°C Figure A																																																			
Item	Load Regulation																																																				
Object	+3.3V1.2A																																																				
1.Graph	<p style="text-align: center;"> Input Volt. 4.5V Input Volt. 5V Input Volt. 9V </p> 	2.Values																																																			
		<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Output Voltage [V]</th> </tr> <tr> <th>Input Volt. 4.5[V]</th> <th>Input Volt. 5[V]</th> <th>Input Volt. 9[V]</th> </tr> </thead> <tbody> <tr> <td>0.00</td> <td>3.328</td> <td>3.328</td> <td>3.328</td> </tr> <tr> <td>0.20</td> <td>3.327</td> <td>3.327</td> <td>3.327</td> </tr> <tr> <td>0.40</td> <td>3.327</td> <td>3.327</td> <td>3.326</td> </tr> <tr> <td>0.60</td> <td>3.326</td> <td>3.326</td> <td>3.326</td> </tr> <tr> <td>0.80</td> <td>3.325</td> <td>3.325</td> <td>3.325</td> </tr> <tr> <td>1.00</td> <td>3.324</td> <td>3.324</td> <td>3.324</td> </tr> <tr> <td>1.20</td> <td>3.322</td> <td>3.323</td> <td>3.323</td> </tr> <tr> <td>1.32</td> <td>3.321</td> <td>3.322</td> <td>3.322</td> </tr> <tr> <td>--</td> <td>-</td> <td>-</td> <td>-</td> </tr> <tr> <td>--</td> <td>-</td> <td>-</td> <td>-</td> </tr> <tr> <td>--</td> <td>-</td> <td>-</td> <td>-</td> </tr> </tbody> </table>	Load Current [A]	Output Voltage [V]			Input Volt. 4.5[V]	Input Volt. 5[V]	Input Volt. 9[V]	0.00	3.328	3.328	3.328	0.20	3.327	3.327	3.327	0.40	3.327	3.327	3.326	0.60	3.326	3.326	3.326	0.80	3.325	3.325	3.325	1.00	3.324	3.324	3.324	1.20	3.322	3.323	3.323	1.32	3.321	3.322	3.322	--	-	-	-	--	-	-	-	--	-	-	-
Load Current [A]	Output Voltage [V]																																																				
	Input Volt. 4.5[V]	Input Volt. 5[V]	Input Volt. 9[V]																																																		
0.00	3.328	3.328	3.328																																																		
0.20	3.327	3.327	3.327																																																		
0.40	3.327	3.327	3.326																																																		
0.60	3.326	3.326	3.326																																																		
0.80	3.325	3.325	3.325																																																		
1.00	3.324	3.324	3.324																																																		
1.20	3.322	3.323	3.323																																																		
1.32	3.321	3.322	3.322																																																		
--	-	-	-																																																		
--	-	-	-																																																		
--	-	-	-																																																		


Note: Slanted line shows the range of the rated load current.

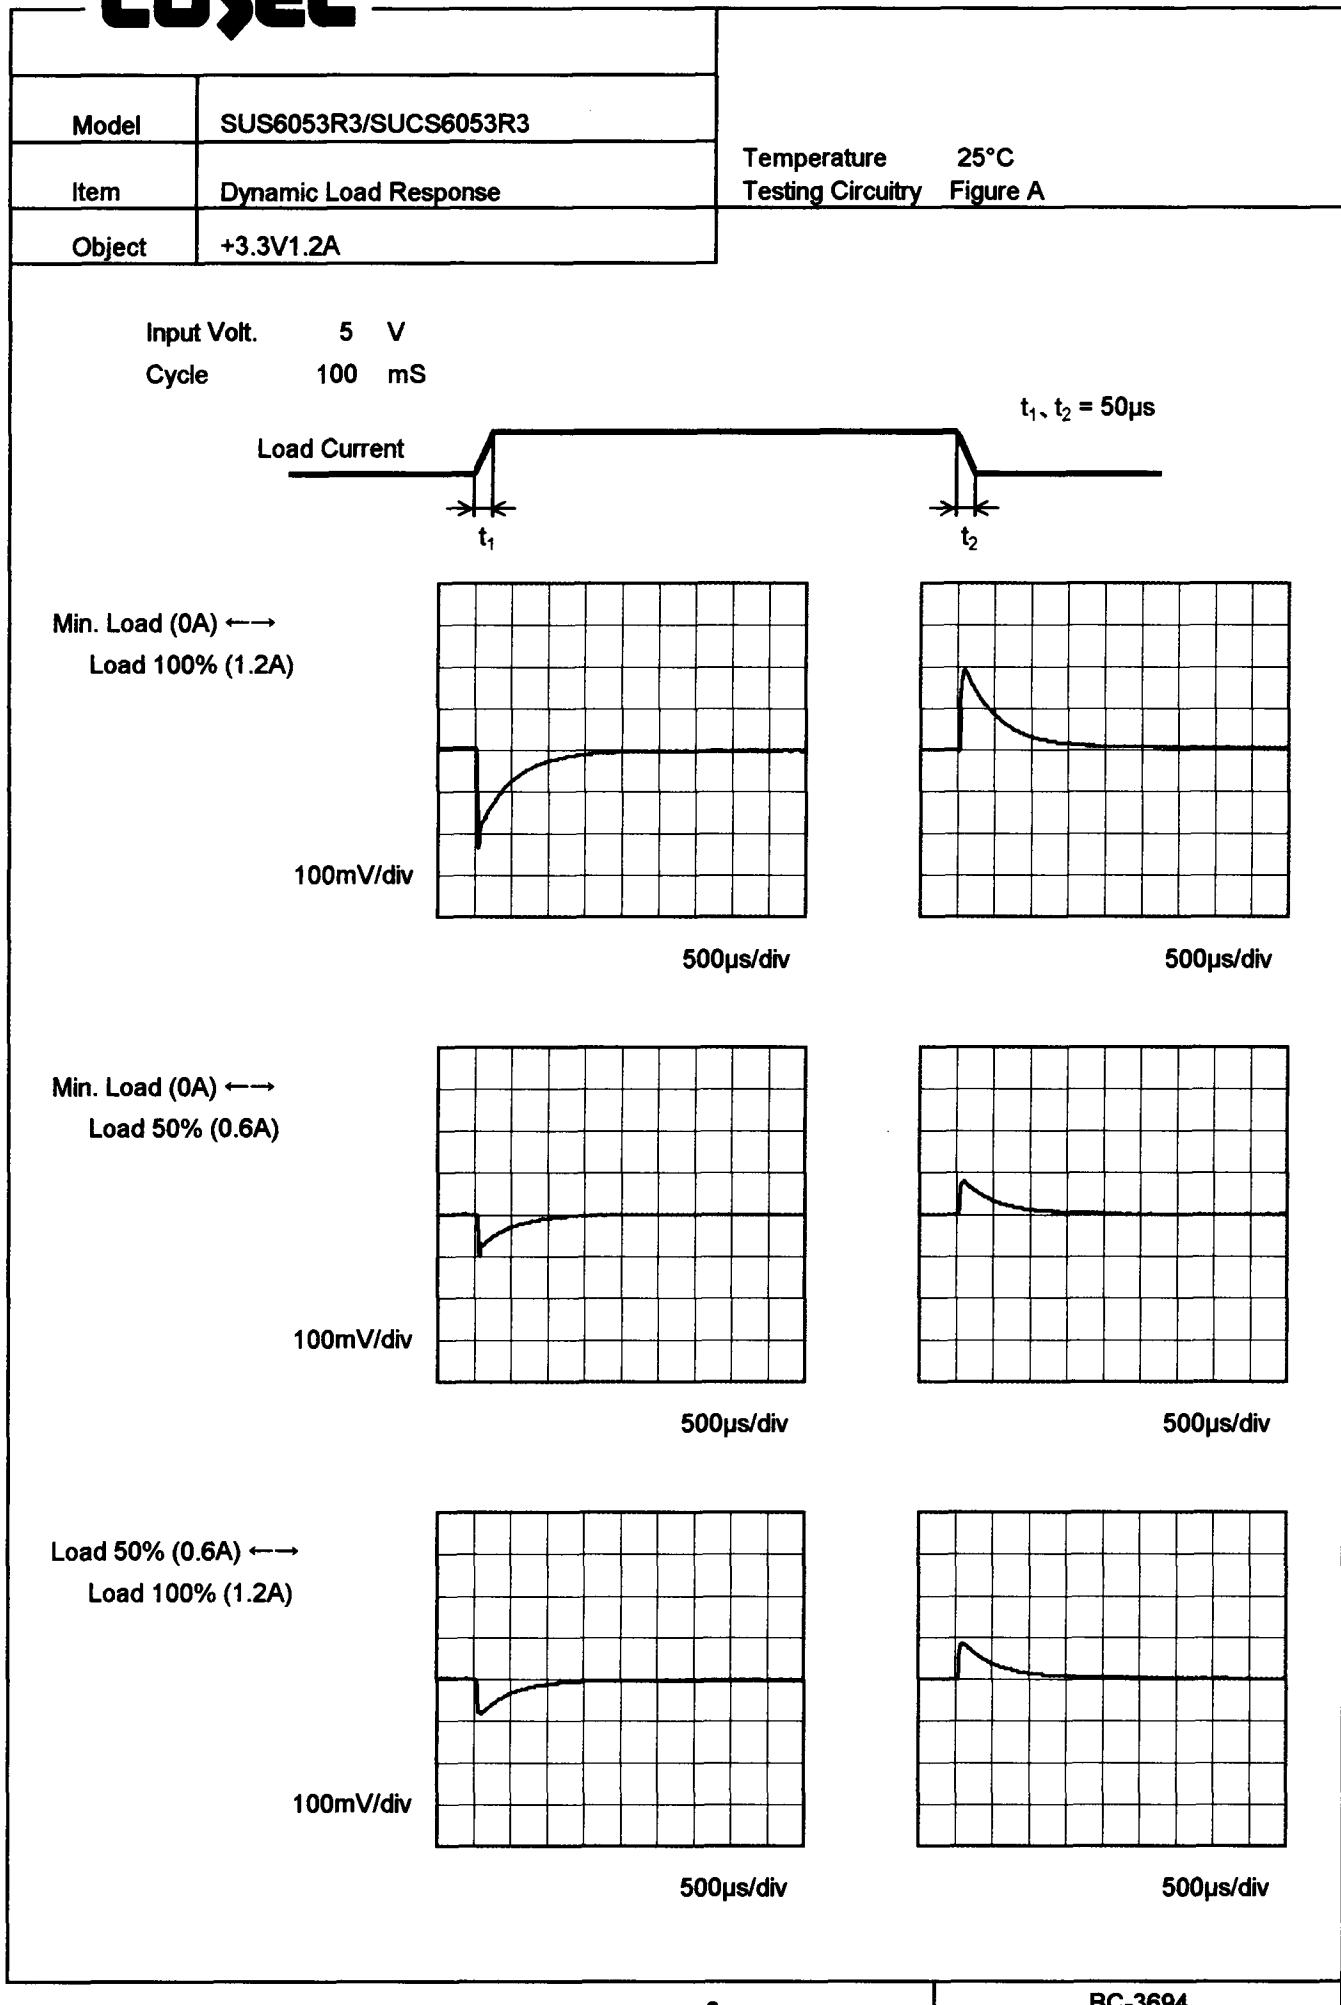COSEL

COSEL

Model	SUS6053R3/SUCS6053R3
Item	Ripple Voltage (by Load Current)
Object	+3.3V1.2A

1.Graph

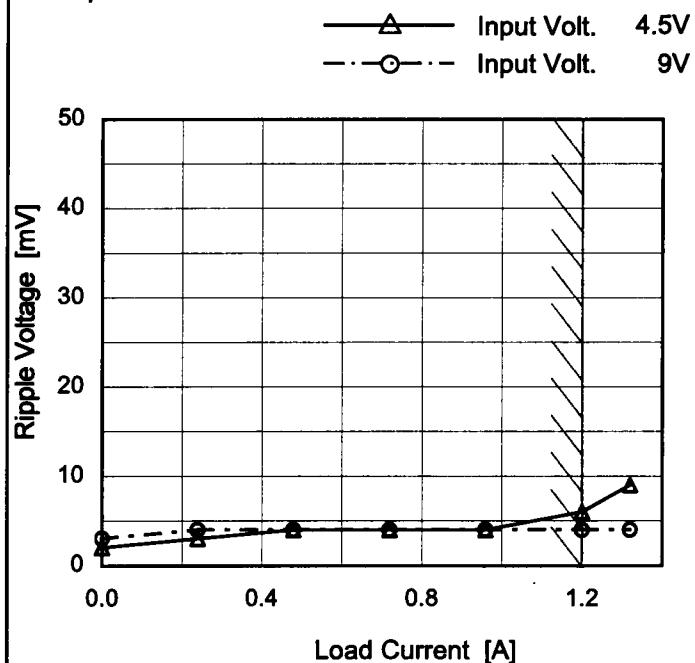

Measured by 100 MHz Oscilloscope.

Ripple Voltage is shown as p-p in the figure below.

Note: Slanted line shows the range of the rated load current.

Temperature 25°C
Testing Circuitry Figure B

2.Values

Load Current [A]	Ripple Voltage [mV]	
	Input Volt. 4.5 [V]	Input Volt. 9 [V]
0.00	2	3
0.24	3	4
0.48	4	4
0.72	4	4
0.96	4	4
1.20	6	4
1.32	9	4
--	-	-
--	-	-
--	-	-
--	-	-

Ripple [mVp-p]

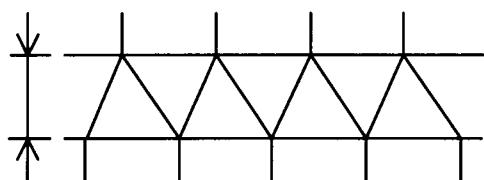


Fig.Complex Ripple Wave Form


COSEL

Model SUS6053R3/SUCS6053R3

Item Ripple-Noise

Object +3.3V1.2A

1.Graph

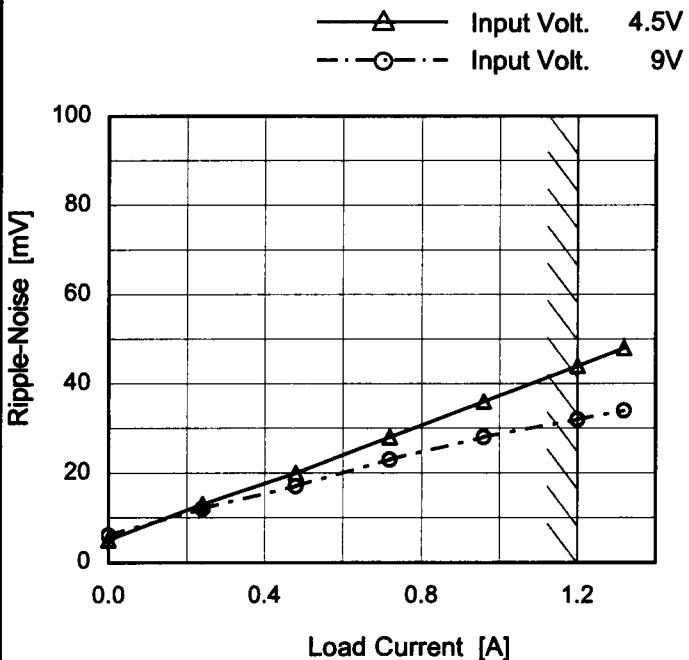

Measured by 100 MHz Oscilloscope.

Ripple-Noise is shown as p-p in the figure below.

Note: Slanted line shows the range of the rated load current.

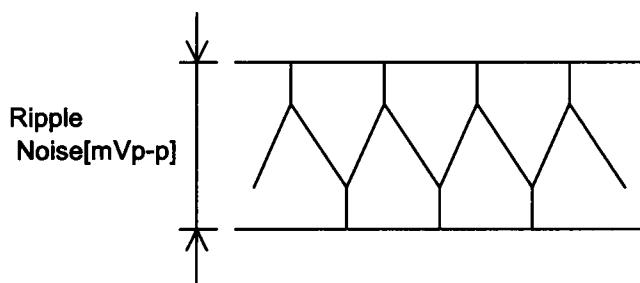


Fig.Complex Ripple Noise Wave Form

Temperature 25°C
Testing Circuitry Figure B


2.Values

Load Current [A]	Ripple-Noise [mV]	
	Input Volt. 4.5 [V]	Input Volt. 9 [V]
0.00	5	6
0.24	13	12
0.48	20	17
0.72	28	23
0.96	36	28
1.20	44	32
1.32	48	34
--	-	-
--	-	-
--	-	-
--	-	-

COSEL

Model	SUS6053R3/SUCS6053R3
Item	Ripple Voltage (by Ambient Temp.)
Object	+3.3V1.2A

1. Graph

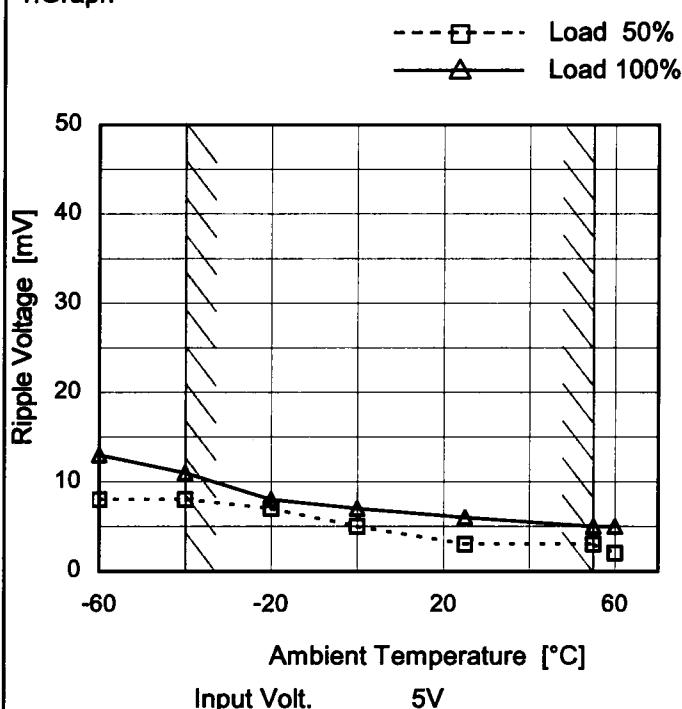


Measured by 100 MHz Oscilloscope.

Note: Slanted line shows the range of the rated ambient temperature.

Testing Circuitry Figure B

2. Values

Ambient Temperature [°C]	Ripple Voltage [mV]	
	Load 50%	Load 100%
-60	8	13
-40	8	11
-20	7	8
0	5	7
25	3	6
55	3	5
60	2	5
--	-	-
--	-	-
--	-	-
--	-	-

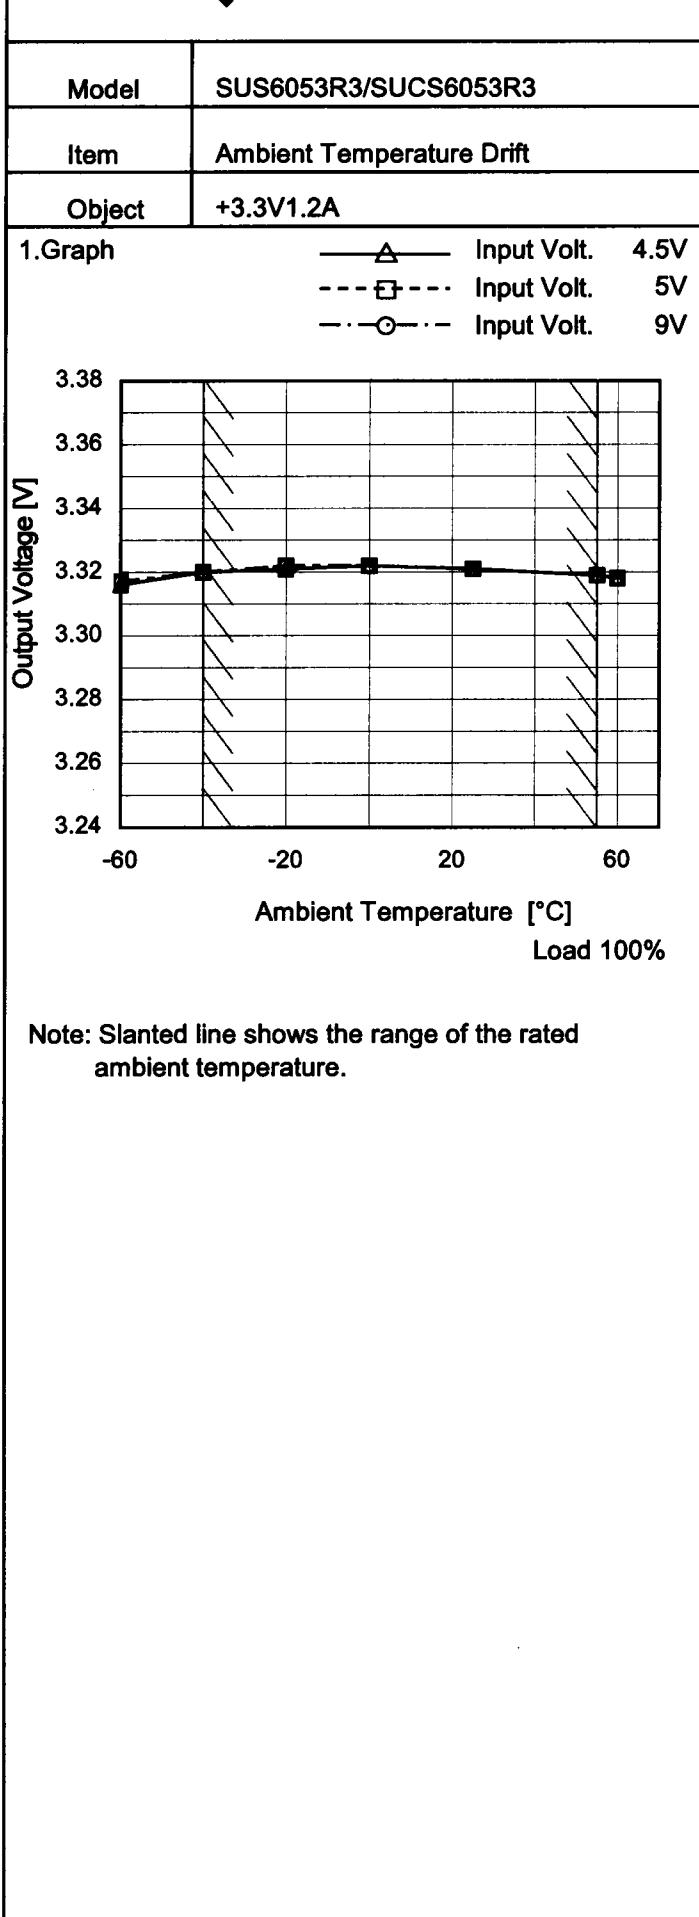COSEL


Testing Circuitry Figure A

2. Values

Ambient Temperature [°C]	Output Voltage [V]		
	Input Volt. 4.5[V]	Input Volt. 5[V]	Input Volt. 9[V]
-60	3.316	3.317	3.317
-40	3.320	3.320	3.320
-20	3.321	3.322	3.322
0	3.322	3.322	3.322
25	3.321	3.321	3.321
55	3.319	3.319	3.319
60	3.318	3.318	3.318
--	-	-	-
--	-	-	-
--	-	-	-
--	-	-	-



Model	SUS6053R3/SUCS6053R3	Testing Circuitry Figure A
Item	Output Voltage Accuracy	
Object	+3.3V1.2A	

1. Output Voltage Accuracy

This is defined as the value of the output voltage, regulation load, ambient temperature and input voltage varied at random in the range as specified below.

Temperature : -40 - 55°C

Input Voltage : 4.5 - 9V

Load Current : 0 - 1.2A


* Output Voltage Accuracy = $\pm(\text{Maximum of Output Voltage} - \text{Minimum of Output Voltage}) / 2$

$$\text{* Output Voltage Accuracy (Ratio)} = \frac{\text{Output Voltage Accuracy}}{\text{Rated Output Voltage}} \times 100$$

2. Values

Item	Temperature [°C]	Input Voltage[V]	Output		Output Voltage Accuracy	
			Current[A]	Voltage[V]	Value [mV]	Ration [%]
Maximum Voltage	25	9	0	3.327	± 4	± 0.1
Minimum Voltage	55	9	1.2	3.319		

COSEL

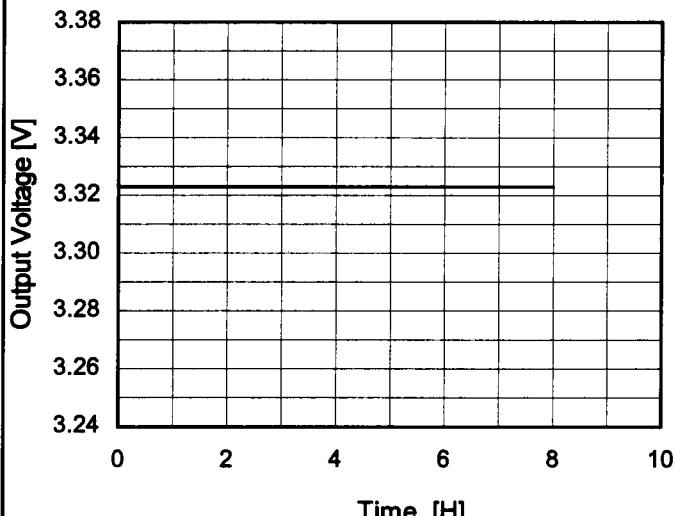
Model	SUS6053R3/SUCA6053R3	Temperature	25°C																						
Item	Time Lapse Drift	Testing Circuitry	Figure A																						
Object	+3.3V1.2A																								
1.Graph			2.Values																						
 <p>Output Voltage [V]</p> <p>Time [H]</p> <p>Input Volt. 5V Load 100%</p>			<table border="1"> <thead> <tr> <th>Time since start [H]</th> <th>Output Voltage [V]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>3.324</td></tr> <tr><td>0.5</td><td>3.323</td></tr> <tr><td>1.0</td><td>3.323</td></tr> <tr><td>2.0</td><td>3.323</td></tr> <tr><td>3.0</td><td>3.323</td></tr> <tr><td>4.0</td><td>3.323</td></tr> <tr><td>5.0</td><td>3.323</td></tr> <tr><td>6.0</td><td>3.323</td></tr> <tr><td>7.0</td><td>3.323</td></tr> <tr><td>8.0</td><td>3.323</td></tr> </tbody> </table>	Time since start [H]	Output Voltage [V]	0.0	3.324	0.5	3.323	1.0	3.323	2.0	3.323	3.0	3.323	4.0	3.323	5.0	3.323	6.0	3.323	7.0	3.323	8.0	3.323
Time since start [H]	Output Voltage [V]																								
0.0	3.324																								
0.5	3.323																								
1.0	3.323																								
2.0	3.323																								
3.0	3.323																								
4.0	3.323																								
5.0	3.323																								
6.0	3.323																								
7.0	3.323																								
8.0	3.323																								

COSEL

Model	SUS6053R3/SUCS6053R3
Item	Rise and Fall Time
Object	+3.3V1.2A

Temperature 25°C
Testing Circuitry Figure A


1. Graph

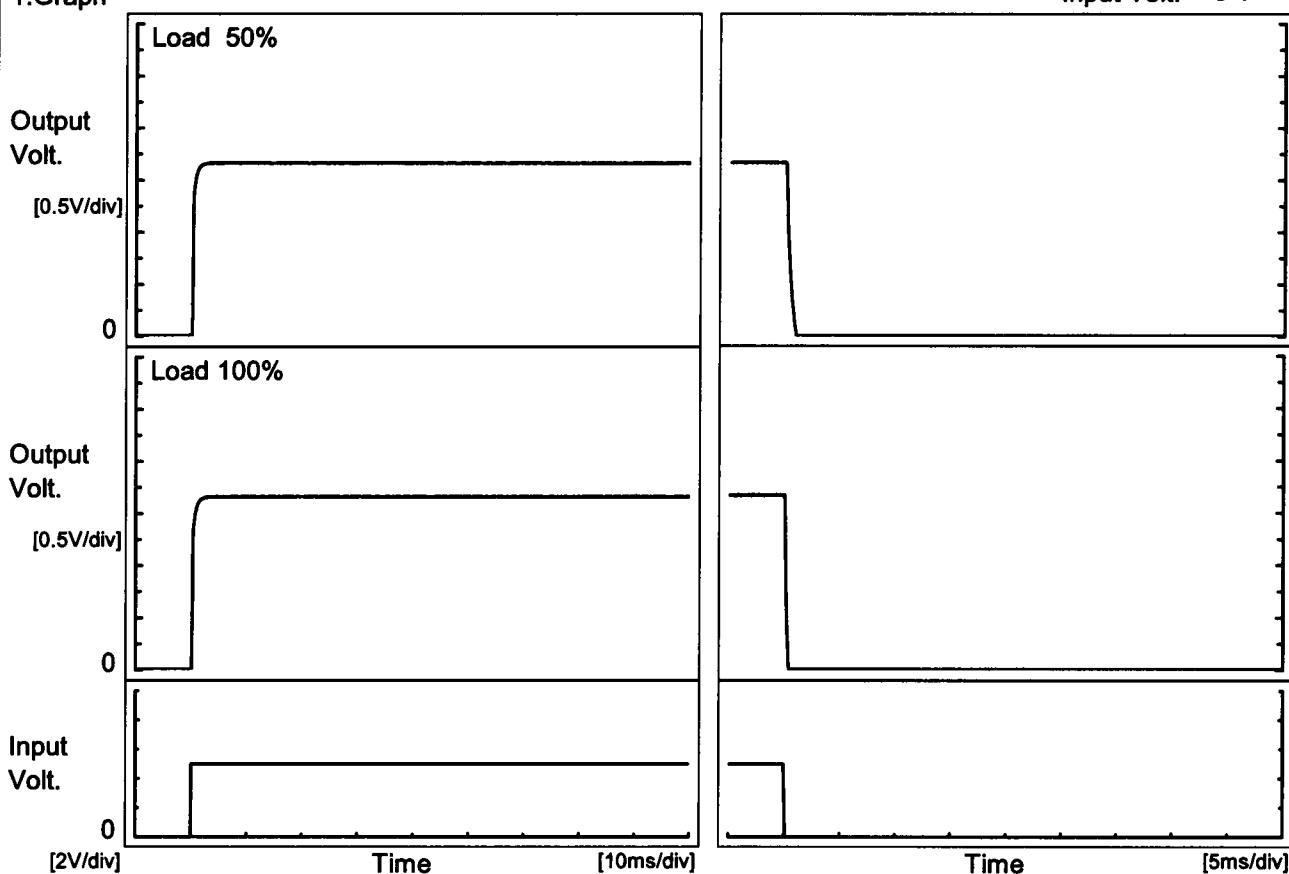

2. Values

[ms]

Load	Time	Td	Tr	Ts	Th	Tf
50 %		0.1	0.6	0.7	0.1	0.7
100 %		0.1	0.7	0.8	0.1	0.3

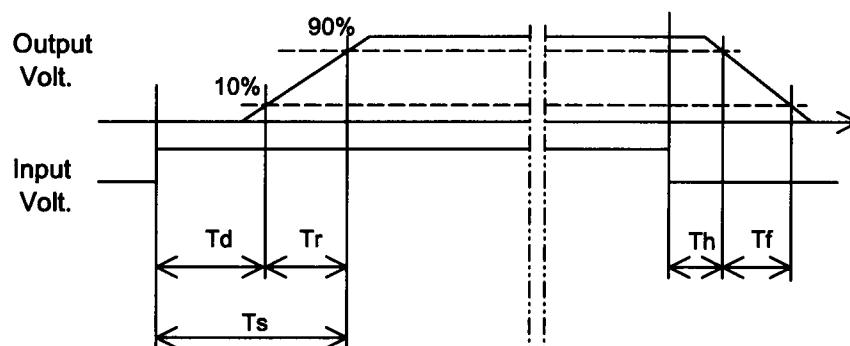


COSEL
Model SUS6053R3/SUCS6053R3

Item Minimum Input Voltage
for Regulated Output Voltage

Object +3.3V1.2A

1. Graph

--- □ --- Load 50%
 —△— Load 100%

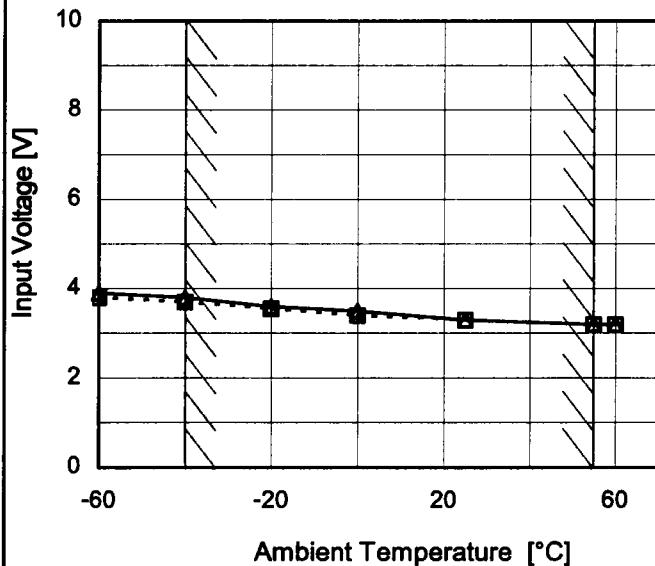


Note: Slanted line shows the range of the rated ambient temperature.

Testing Circuitry Figure A
2. Values

Ambient Temperature [°C]	Input Voltage [V]	
	Load 50%	Load 100%
-60	3.8	3.9
-40	3.7	3.8
-20	3.6	3.6
0	3.4	3.5
25	3.3	3.3
55	3.2	3.2
60	3.2	3.2
--	-	-
--	-	-
--	-	-
--	-	-

COSEL

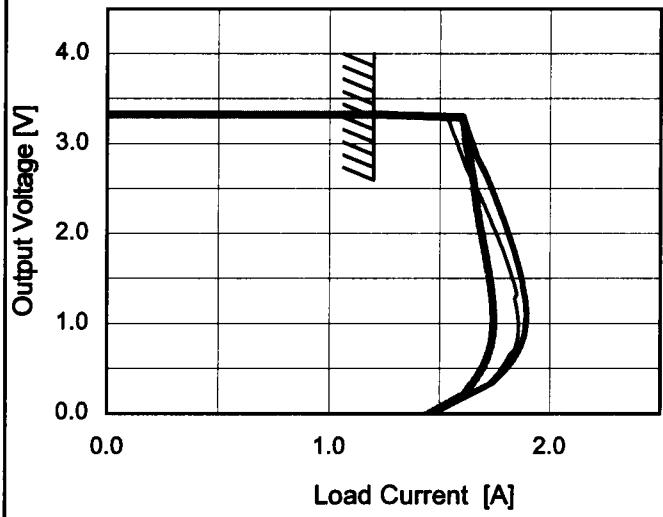Model	SUS6053R3/SUCS6053R3	Temperature Testing Circuitry	25°C Figure A																																																							
Item	Overcurrent Protection																																																									
Object	+3.3V1.2A																																																									
1.Graph		Input Volt. 4.5V Input Volt. 5V Input Volt. 9V																																																								
 <p>The graph plots Output Voltage [V] on the Y-axis (0.0 to 4.0) against Load Current [A] on the X-axis (0.0 to 2.0). Three curves are shown for different input voltages: 4.5V (top), 5V (middle), and 9V (bottom). All curves show a sharp drop in output voltage as load current increases beyond the rated value. A slanted line is drawn across the graph, representing the range of the rated load current.</p>		2.Values																																																								
		<table border="1"> <thead> <tr> <th rowspan="2">Output Voltage [V]</th> <th colspan="3">Load Current [A]</th> </tr> <tr> <th>Input Volt. 4.5[V]</th> <th>Input Volt. 5[V]</th> <th>Input Volt. 9[V]</th> </tr> </thead> <tbody> <tr><td>3.30</td><td>1.21</td><td>1.21</td><td>1.21</td></tr> <tr><td>3.14</td><td>1.56</td><td>1.63</td><td>1.61</td></tr> <tr><td>2.97</td><td>1.58</td><td>1.65</td><td>1.62</td></tr> <tr><td>2.64</td><td>1.64</td><td>1.71</td><td>1.65</td></tr> <tr><td>2.31</td><td>1.70</td><td>1.77</td><td>1.67</td></tr> <tr><td>1.98</td><td>1.76</td><td>1.82</td><td>1.69</td></tr> <tr><td>1.65</td><td>1.81</td><td>1.86</td><td>1.72</td></tr> <tr><td>1.32</td><td>1.85</td><td>1.89</td><td>1.74</td></tr> <tr><td>0.99</td><td>1.86</td><td>1.89</td><td>1.74</td></tr> <tr><td>0.66</td><td>1.82</td><td>1.85</td><td>1.72</td></tr> <tr><td>0.33</td><td>1.73</td><td>1.74</td><td>1.65</td></tr> <tr><td>0.00</td><td>1.37</td><td>1.40</td><td>1.40</td></tr> </tbody> </table>		Output Voltage [V]	Load Current [A]			Input Volt. 4.5[V]	Input Volt. 5[V]	Input Volt. 9[V]	3.30	1.21	1.21	1.21	3.14	1.56	1.63	1.61	2.97	1.58	1.65	1.62	2.64	1.64	1.71	1.65	2.31	1.70	1.77	1.67	1.98	1.76	1.82	1.69	1.65	1.81	1.86	1.72	1.32	1.85	1.89	1.74	0.99	1.86	1.89	1.74	0.66	1.82	1.85	1.72	0.33	1.73	1.74	1.65	0.00	1.37	1.40	1.40
Output Voltage [V]	Load Current [A]																																																									
	Input Volt. 4.5[V]	Input Volt. 5[V]	Input Volt. 9[V]																																																							
3.30	1.21	1.21	1.21																																																							
3.14	1.56	1.63	1.61																																																							
2.97	1.58	1.65	1.62																																																							
2.64	1.64	1.71	1.65																																																							
2.31	1.70	1.77	1.67																																																							
1.98	1.76	1.82	1.69																																																							
1.65	1.81	1.86	1.72																																																							
1.32	1.85	1.89	1.74																																																							
0.99	1.86	1.89	1.74																																																							
0.66	1.82	1.85	1.72																																																							
0.33	1.73	1.74	1.65																																																							
0.00	1.37	1.40	1.40																																																							

Note: Slanted line shows the range of the rated load current.

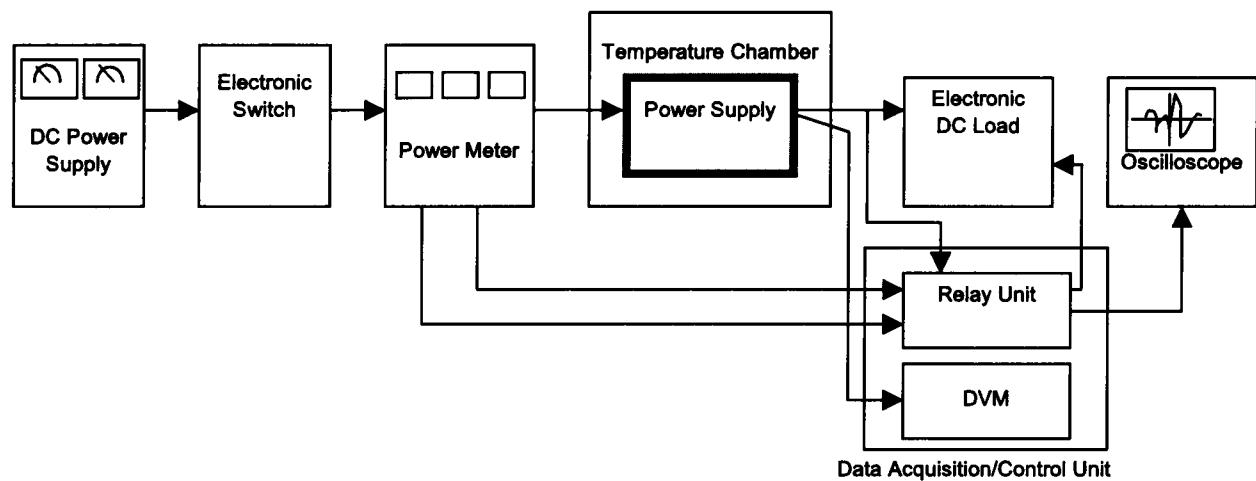


Figure A

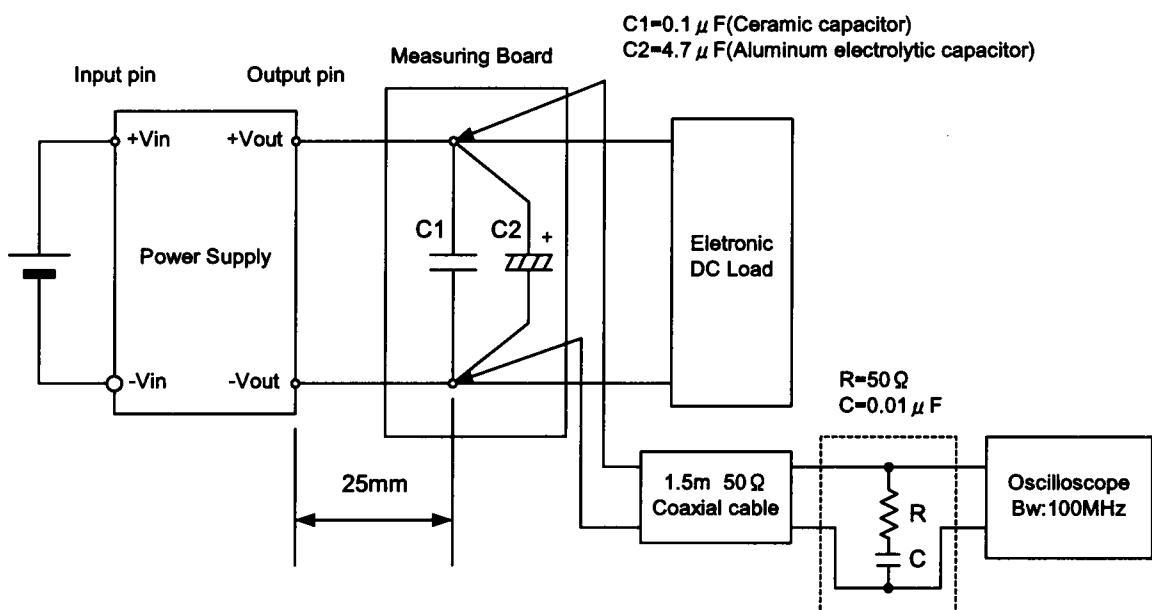


Figure B (Ripple and Ripple noise Characteristic)