

TEST DATA OF TAC-60-□□□-U

Noise Filter

May. 20. 2016

Approved by : Tadayuki Noda
Tadayuki Noda Design Manager

Prepared by : Shiro Gotani
Shiro Gotani Design Engineer



COSEL CO.,LTD.

CONTENTS

1.Attenuation Characteristics	1
2.Leakage Current	3
3.Figure of Testing Circuitry	4
(Final Page 4)	




Model	TAC-60-□□□-U		
Item	Attenuation Characteristics	Temperature	25°C
Object		Testing Circuitry	Figure A

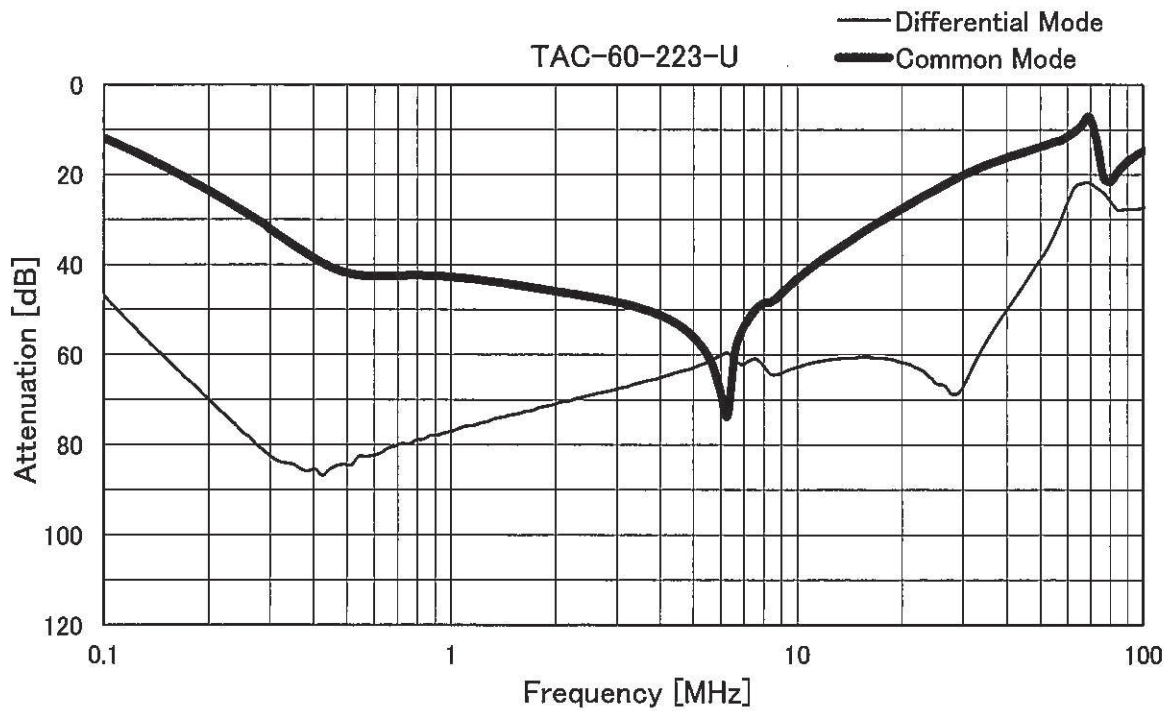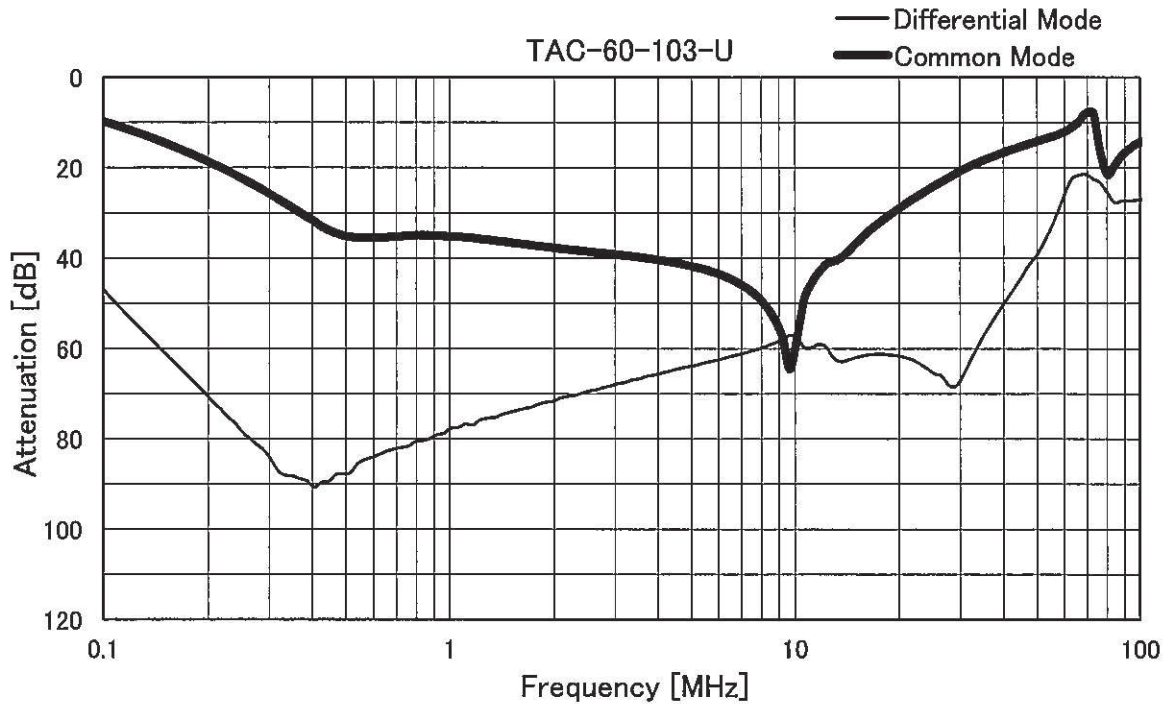



Model	TAC-60-□□□-U
Item	Attenuation Characteristics
Object	_____

Temperature 25°C
Testing Circuitry Figure A

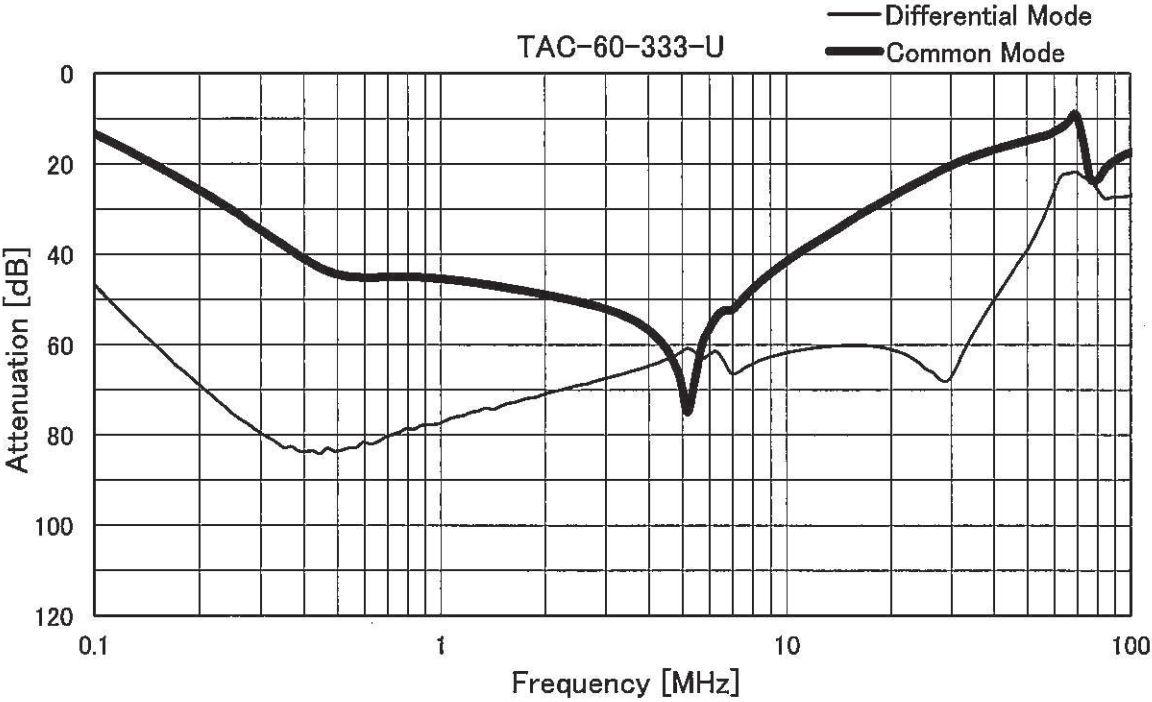



Model		TAC-60-□□□-U	Temperature 25°C Testing Circuitry Figure B
Item		Leakage Current	
Object		_____	

1.Results

[mA]

Model	Standards	Input Volt.					Note
		200 [V]	250 [V]	400 [V]	480 [V]	500 [V]	
TAH-60-103-U	UL1283	0.62	0.78				
TAH-60-223-U	UL1283	1.4	1.8				
TAH-60-333-U	UL1283	2.1	2.7				

2.Condition

Leakage current value is concluded after measuring both phases of AC input and by choosing the larger one.

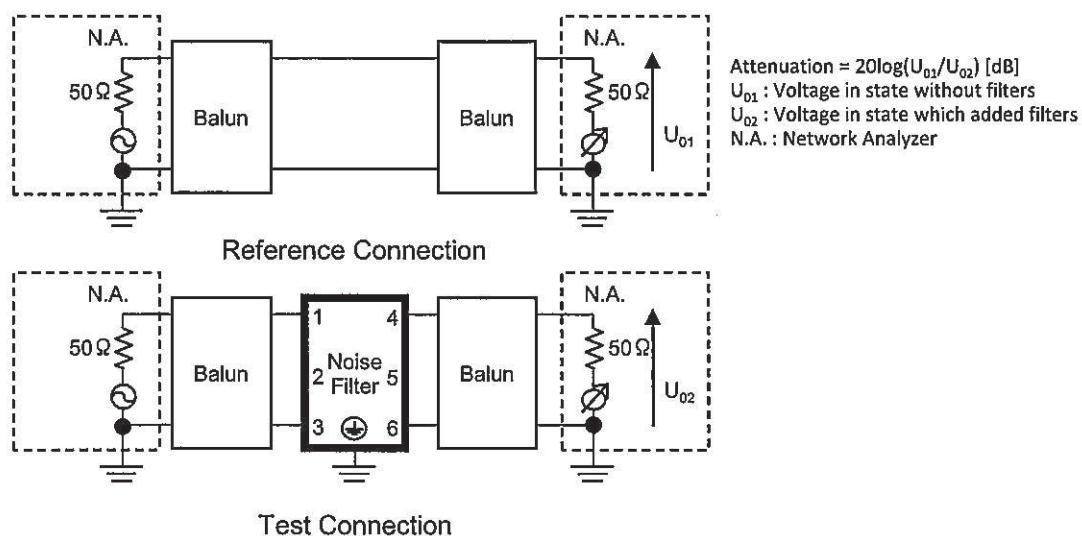


Figure A - 1 Differential mode attenuation measurement

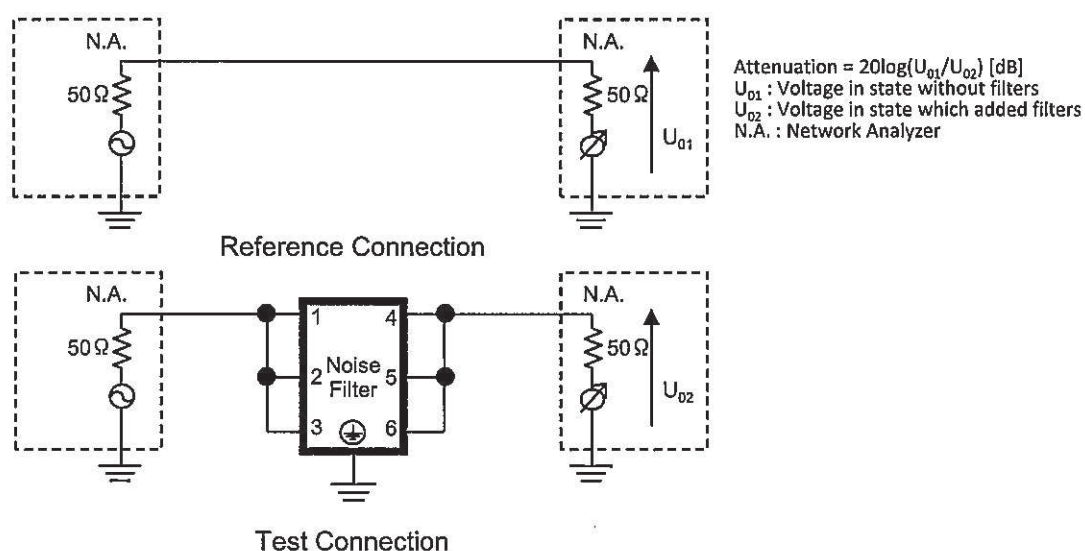


Figure A - 2 Common mode attenuation measurement

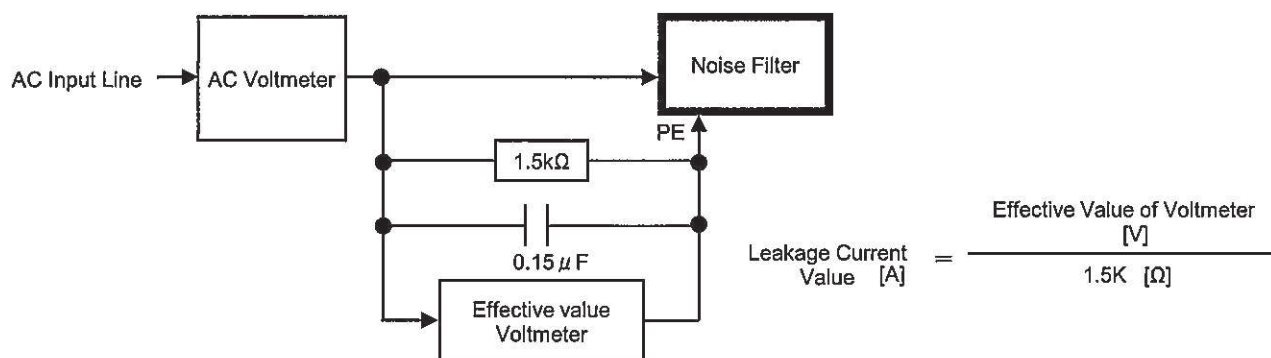


Figure B Leakage current measurement (UL1283)