



DATA SHEET

Model		TECS10F-12	Date	24-Mar-25
Test		EMI Line conduction & Radiated emission	Temp.	25 degreeC
			Humid.	40 %RH
			Tested by	T.Sakuma

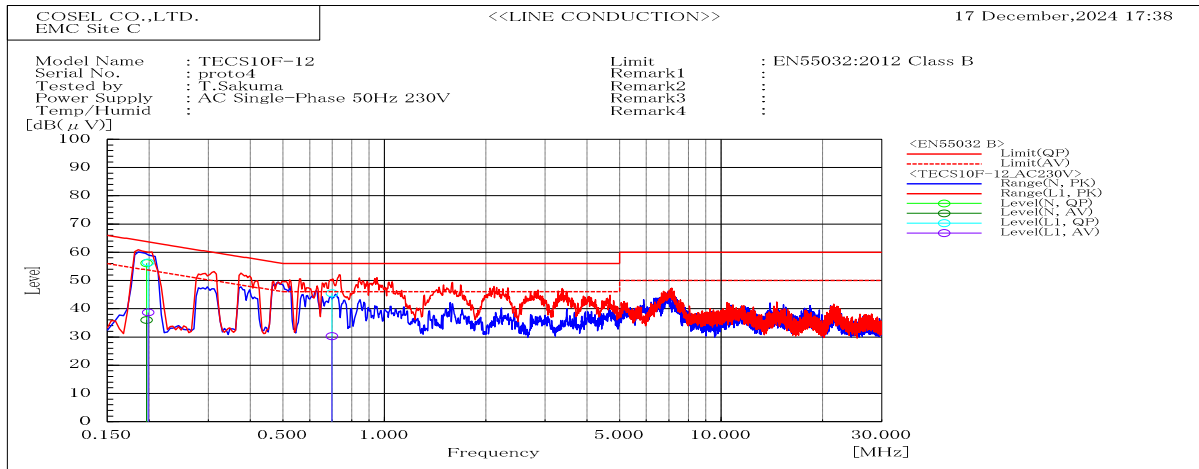


Frequency MHz	Line	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/Fail	Remark
		QP	AV	QP	AV	QP	AV		
0.199	L1	56.4	38.7	63.7	53.7	7.3	15	Pass	
0.698	L1	45.5	30.3	56	46	10.5	15.7	Pass	
0.197	N	56.2	36	63.8	53.8	7.6	17.8	Pass	

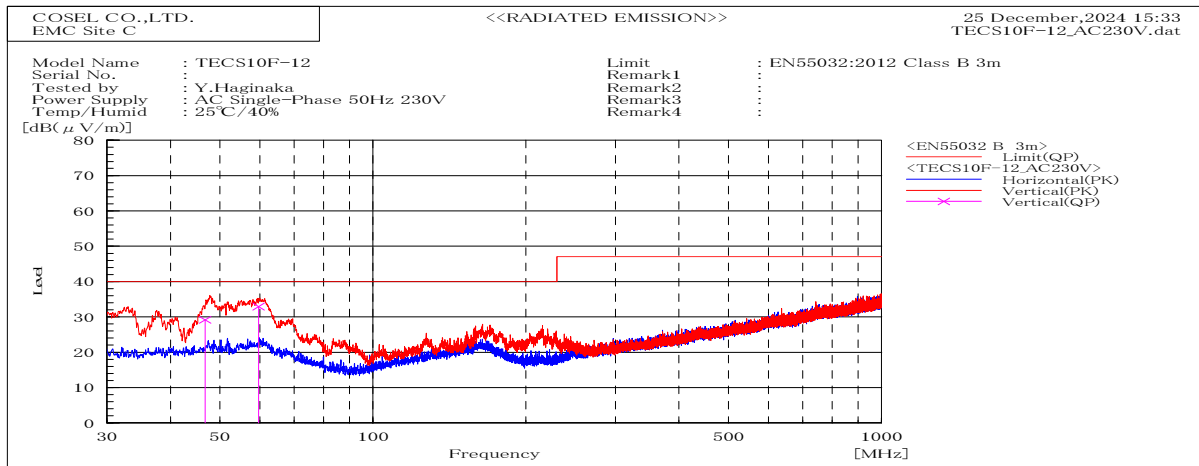


Frequency MHz	Polarization	Stability	Level dB(μV/m)		Limit dB(μV/m)	Margin dB	Pass/Fail	Height cm	Angle deg	Remark
			QP	QP						
46.825	V	Stable	29.2	40	10.8	Pass	101.6	130.1		
59.644	V	Stable	32.9	40	7.1	Pass	100.3	346.1		

DATA SHEET		Date	24-Mar-25
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	T.Sakuma

1. Line conduction

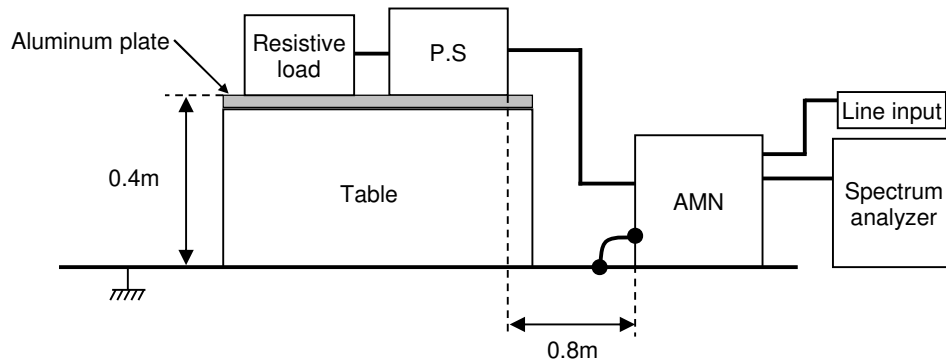


2. Radiated emission

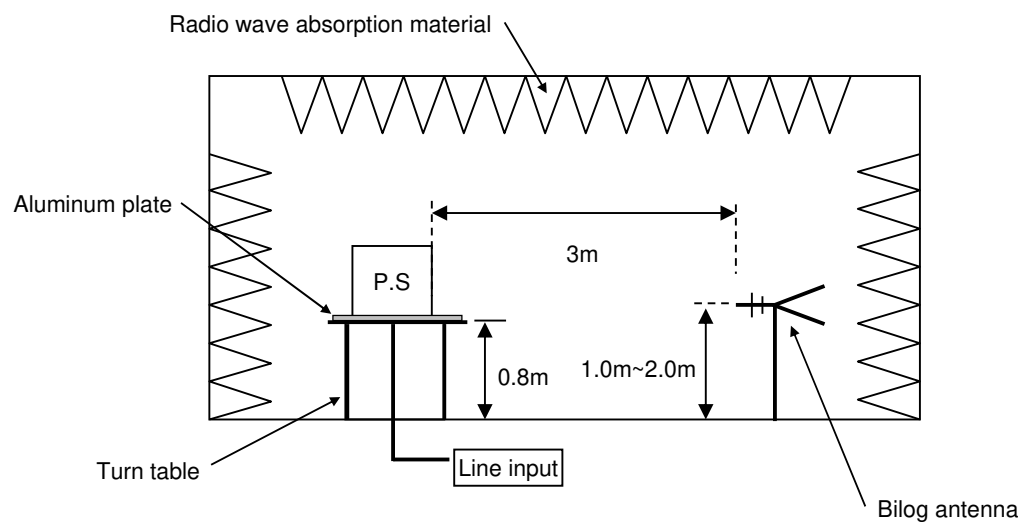

Conditions

Test : EMI
Model Name : TECS10F-12

1.LINE CONDUCTION

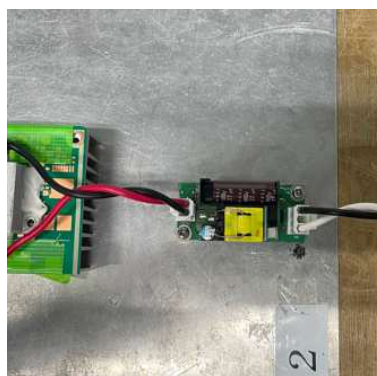

2.RADIATED EMISSION

