



## DATA SHEET

Model		TECS10F-15	Date	01-Apr-25
Test		EMI Line conduction & Radiated emission	Temp.	25 degreeC
			Humid.	40 %RH
			Tested by	T.Sakuma

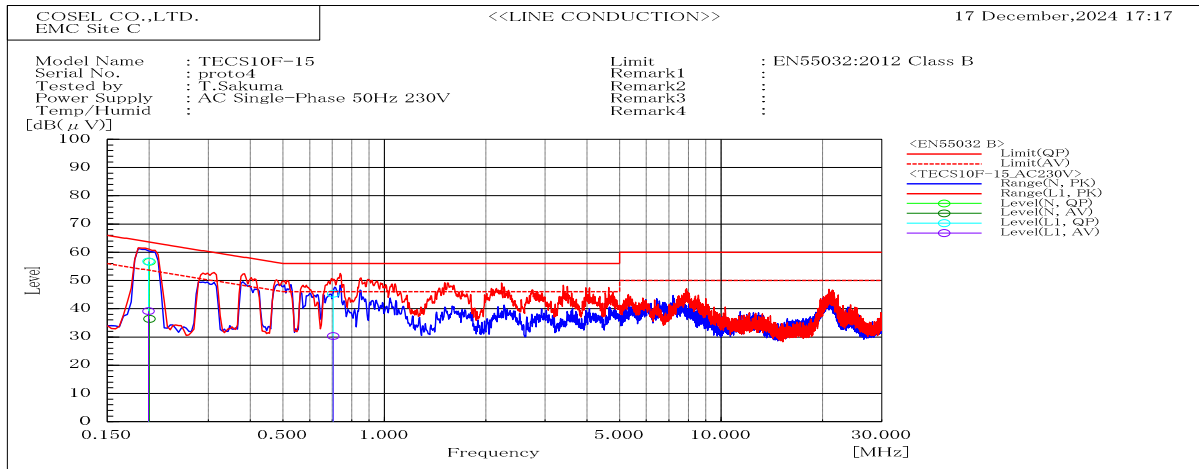


Frequency MHz	Line	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/Fail	Remark
		QP	AV	QP	AV	QP	AV		
0.2	N	56.6	36.4	63.6	53.6	7	17.2	Pass	
0.199	L1	56.8	39.2	63.7	53.7	6.9	14.5	Pass	
0.704	L1	45.3	30.3	56	46	10.7	15.7	Pass	

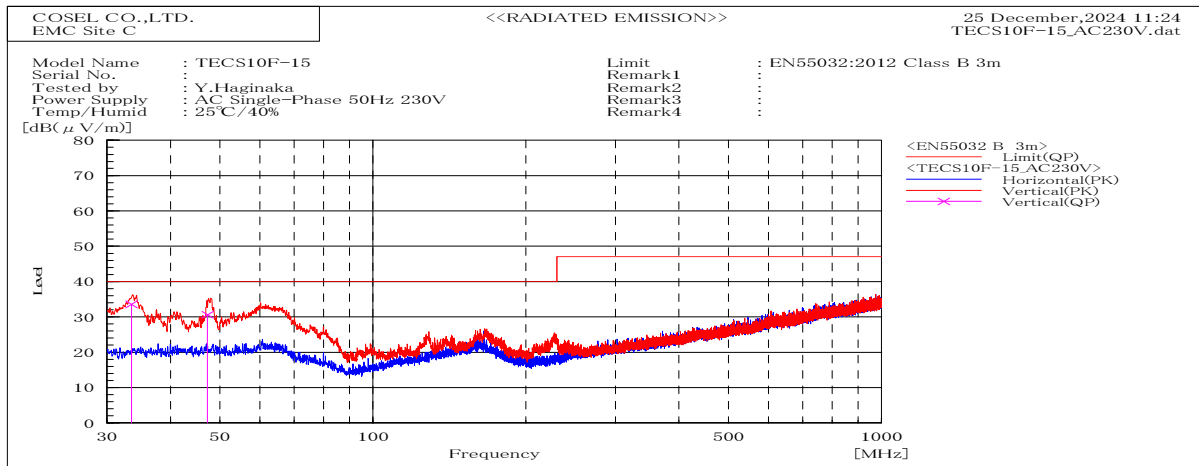


Frequency MHz	Polarization	Stability	Level dB(μV/m)		Limit dB(μV/m)	Margin dB	Pass/Fail	Height cm	Angle deg	Remark
			QP	QP		QP				
33.533	V	Stable	33.6	40	6.4	Pass	100.2	334.6		
47.325	V	Stable	30.7	40	9.3	Pass	101.7	36.9		

DATA SHEET		Date	25-Mar-25
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	T.Sakuma

### 1. Line conduction

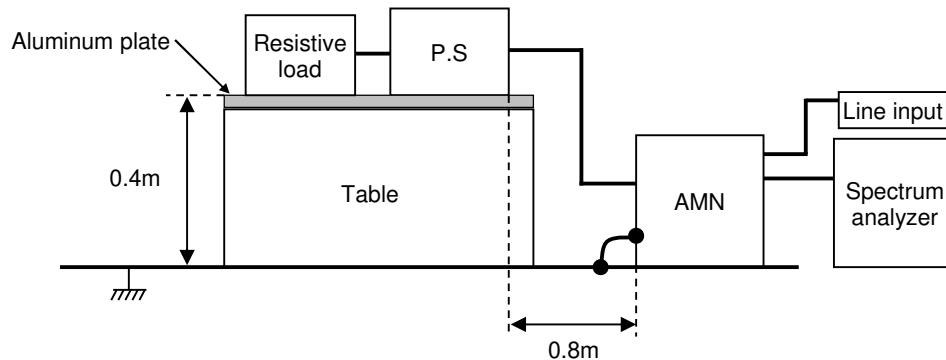


### 2. Radiated emission

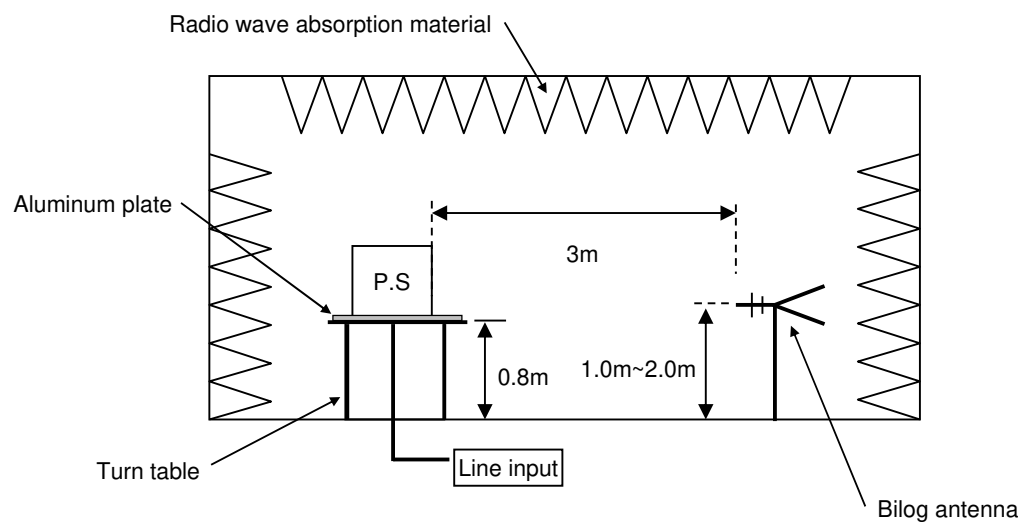

## Conditions

Test : EMI  
Model Name : TECS10F-15

### 1.LINE CONDUCTION

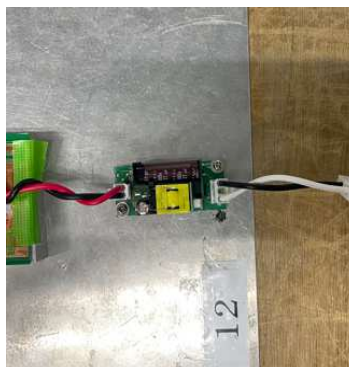

### 2.RADIATED EMISSION

