


TECS45F-12 Expected Life : 推定寿命

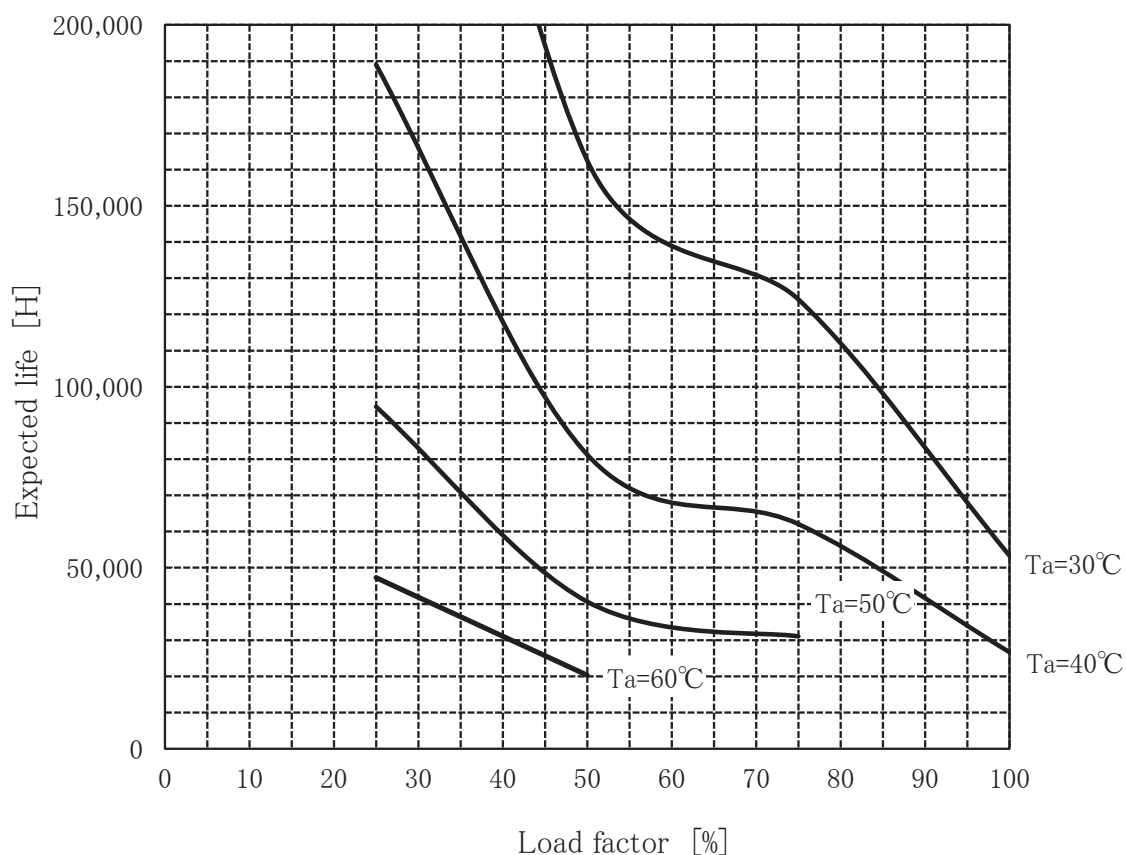

- Above expected life time is calculated according our calculation standard.
上記推定寿命は、当社算出基準に従い算出したものです。
- Over the area of 100,000 hours, the degradation of sealing rubber, etc., is not included in the calculation.
10万時間以上の領域では、封ロム等の劣化等の影響は、計算式には含まれていません。

Conditions


(1) Input voltage 90 ~ 264VAC 60Hz

(2) Output voltage
Output current


| DC OUTPUT | Load factor | | | |
|--------------|-------------|-------|------|-------|
| | 100% | 75% | 50% | 25% |
| 12V | 3.8A | 2.85A | 1.9A | 0.95A |

(3) Cooling method Convection

(4) Mounting method Refer below

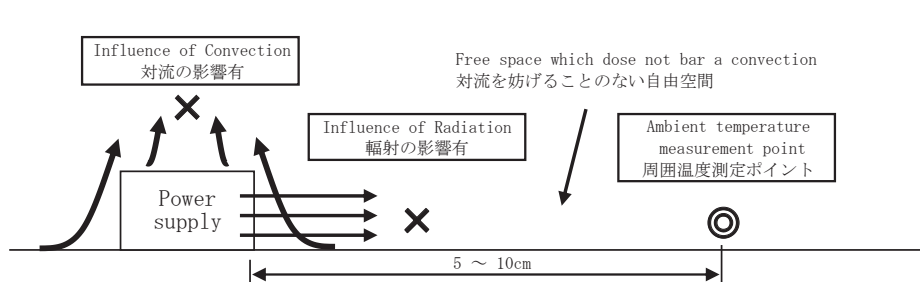

With the ambient temperature of graph, it measures in the environment of a figure.
グラフの周囲温度とは、図の環境で測定したものです。



Mounting method (E)