



DATA SHEET		Date	05-Sep-23
Model	UMA30F-15	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	45 %RH
		Tested by	A.Mukai

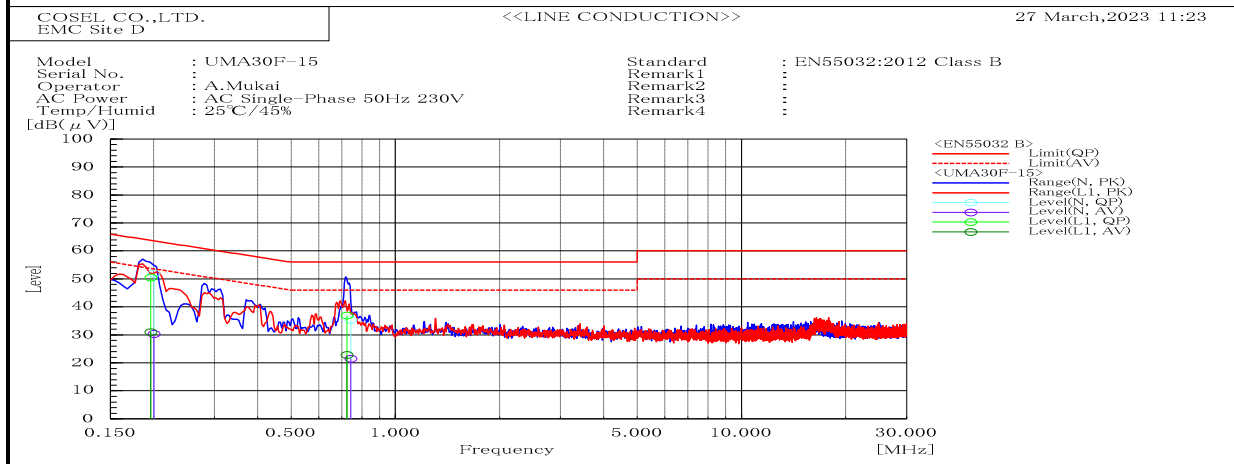


Frequency	Line	Level		Limit		Margin		Pass/Fail	Remark
MHz		dB(μV)		dB(μV)		dB			
		QP	AV	QP	AV	QP	AV		
0.197	L1	50.5	31	63.8	53.8	13.3	22.8	Pass	
0.201	N	52	30.3	63.6	53.6	11.6	23.3	Pass	
0.725	L1	36.9	22.8	56	46	19.1	23.2	Pass	
0.743	N	35.3	21.5	56	46	20.7	24.5	Pass	

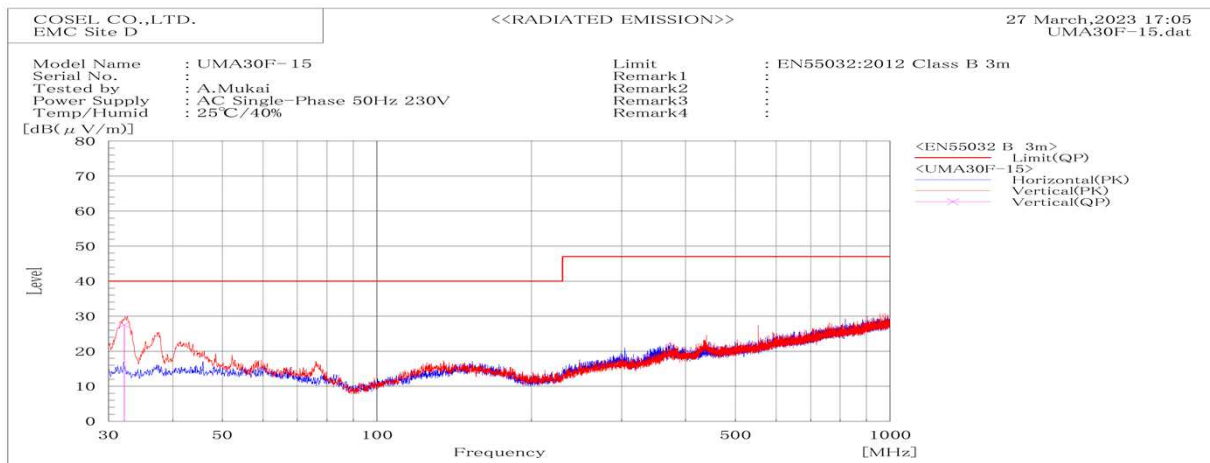


Frequency	Polarization	Stability	Level	Limit	Margin	Pass/Fail	Height	Angle	Remark
MHz			dB(μV/m)	dB(μV/m)	dB				
			QP	QP	QP				
32.172	V	Stable	27.6	40	12.4	Pass	100.2	27.7	

DATA SHEET		Date	05-Sep-23
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	45 %RH
		Tested by	A.Mukai

## 1. Line conduction

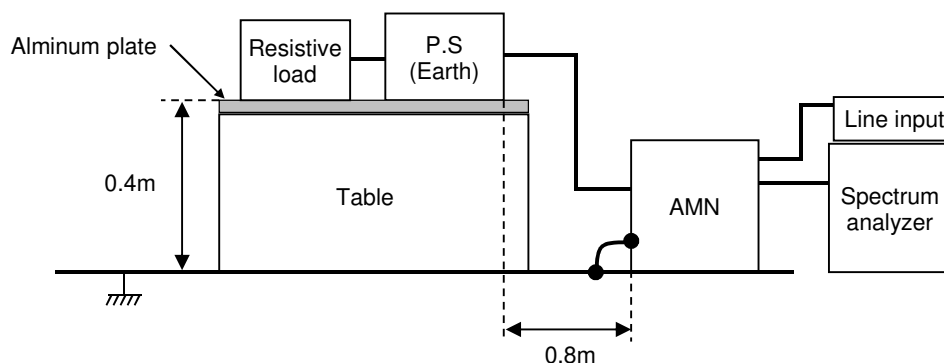

## 2. Radiated emission

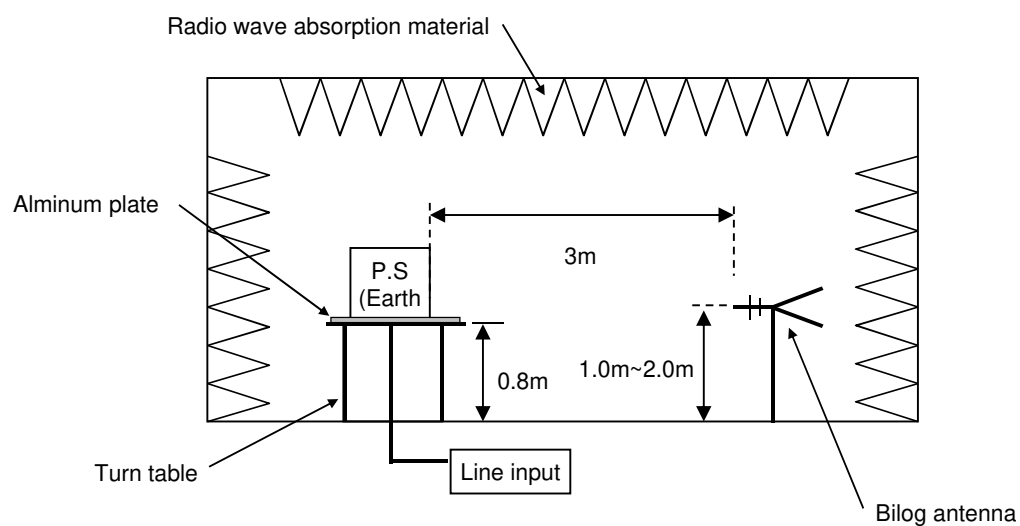


## Conditions

Test : EMI  
Model Name: UMA30F-15

○Photographs of Test Set-Up

### 1. LINE CONDUCTION

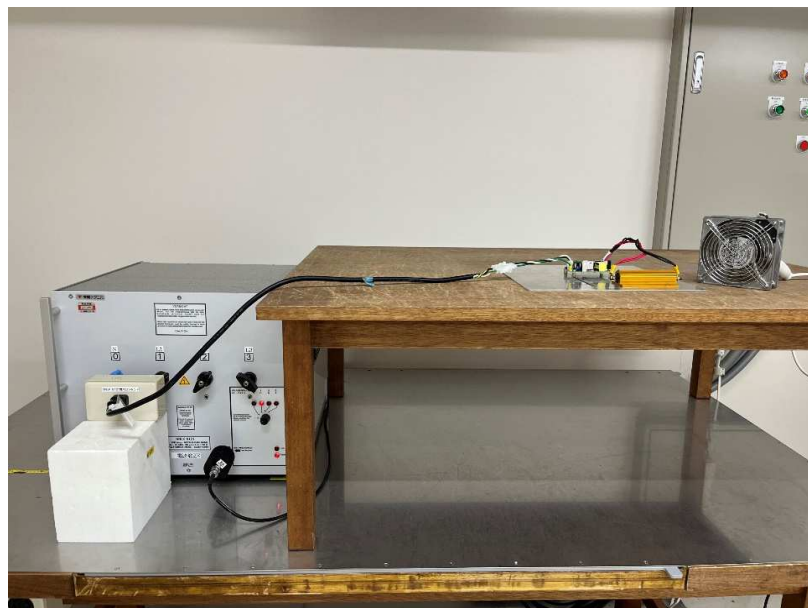

### 2. RADIATED EMISSION

