



DATA SHEET		Date	05-Sep-23
Model	UMA30F-36	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	45 %RH
		Tested by	A.Mukai

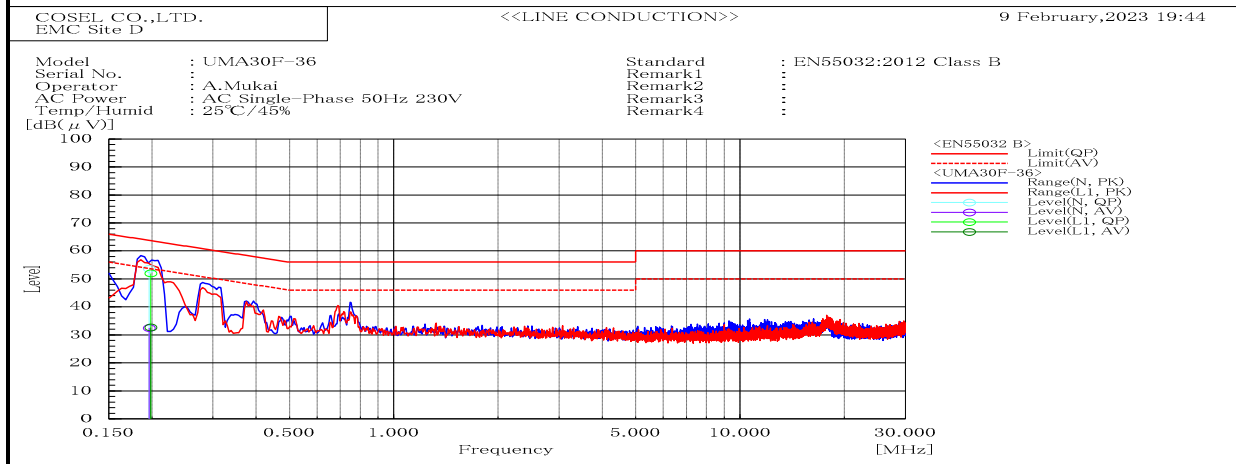


Frequency	Line	Level		Limit		Margin		Pass/Fail	Remark
MHz		dB(μV)		dB(μV)		dB			
		QP	AV	QP	AV	QP	AV		
0.196	N	53.6	32.5	63.8	53.8	10.2	21.3	Pass	
0.199	L1	52	32.6	63.7	53.7	11.7	21.1	Pass	

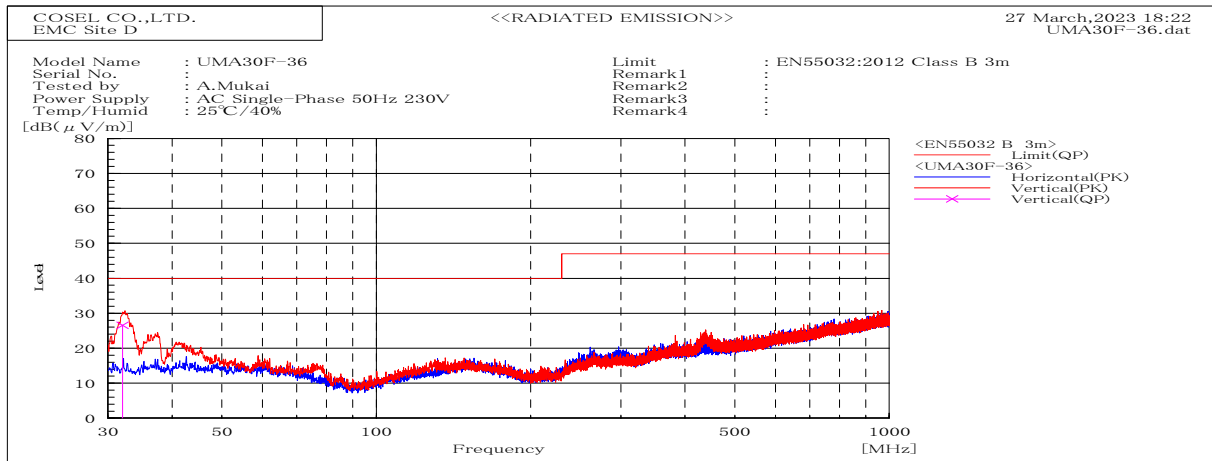


Frequency	Polarization	Stability	Level	Limit	Margin	Pass/Fail	Height	Angle	Remark
MHz			dB(μV/m)	dB(μV/m)	dB				
			QP	QP	QP				
32.023	V	Stable	26.6	40	13.4	Pass	101.7	224.7	

DATA SHEET		Date	05-Sep-23
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	45 %RH
		Tested by	A.Mukai

1. Line conduction

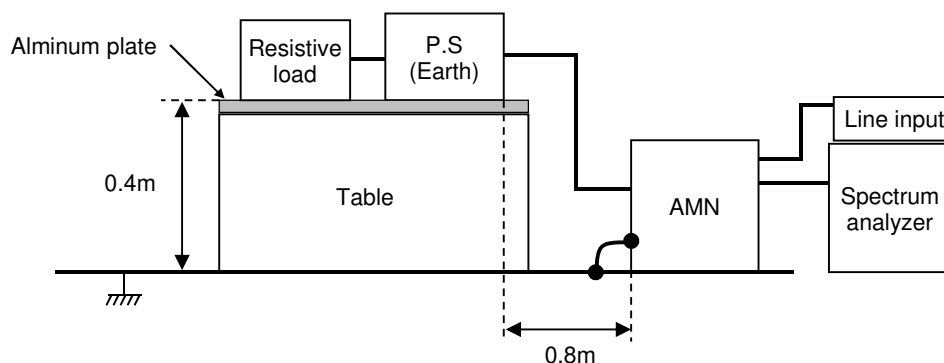

2. Radiated emission

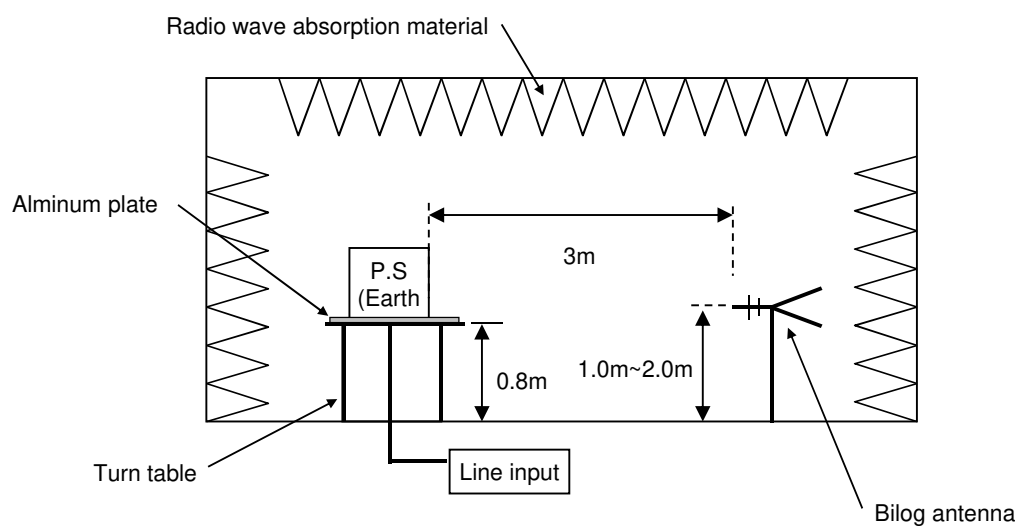


Conditions

Test : EMI
Model Name: UMA30F-36

○Photographs of Test Set-Up

1. LINE CONDUCTION

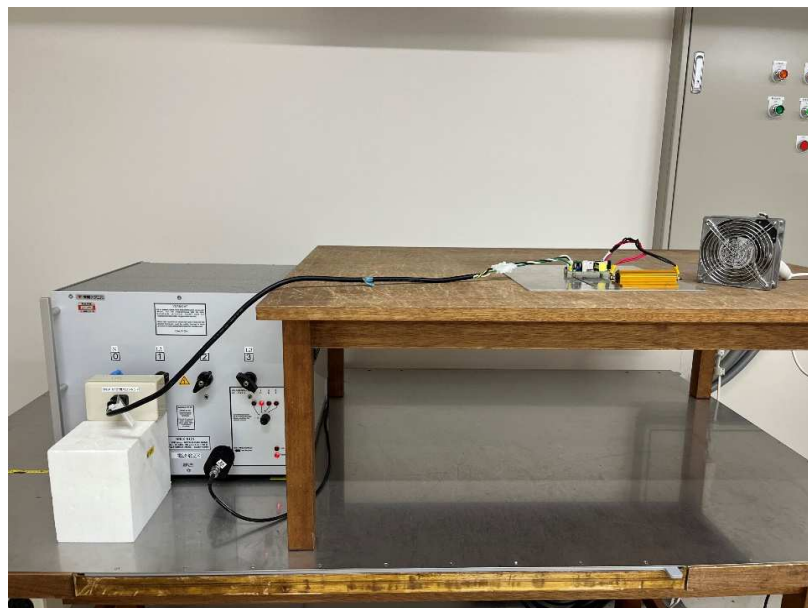

2. RADIATED EMISSION

