


UMA60F-48 Expected Life(Aluminum electrolytic capacitor)

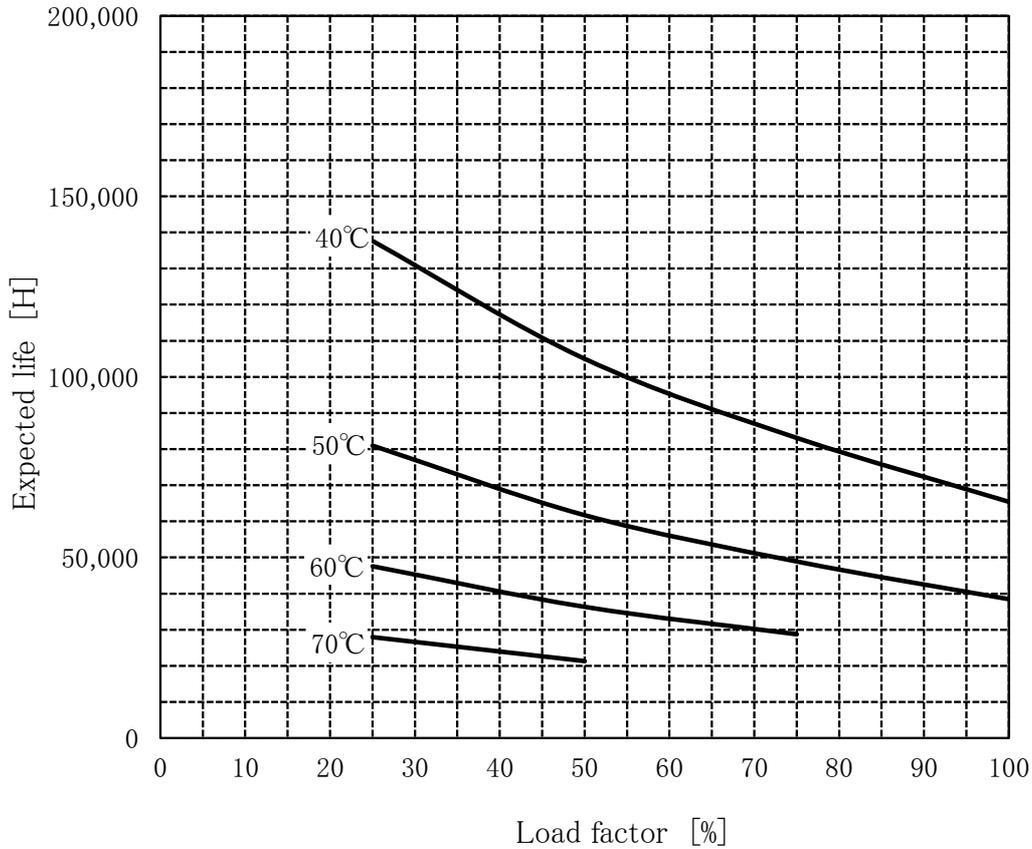


- Above expected life time is calculated according our calculation standard.
- Over the area of 100,000 hours, the degradation of sealing rubber, etc., is not included in the calculation.
- Please refer derating curve shown in instruction manual about the maximum value of ambient temperature.

Conditions

- (1) Input voltage AC100-264V 50Hz
- (2) Output voltage/current

| DC OUTPUT | Load factor | | | |
|-----------|-------------|-------|-------|-------|
| | 100% | 75% | 50% | 25% |
| 48V | 1.25A | 0.94A | 0.63A | 0.31A |
| — | — | — | — | — |
| — | — | — | — | — |

- (3) Cooling method Convection
- (4) Mounting method Refer below

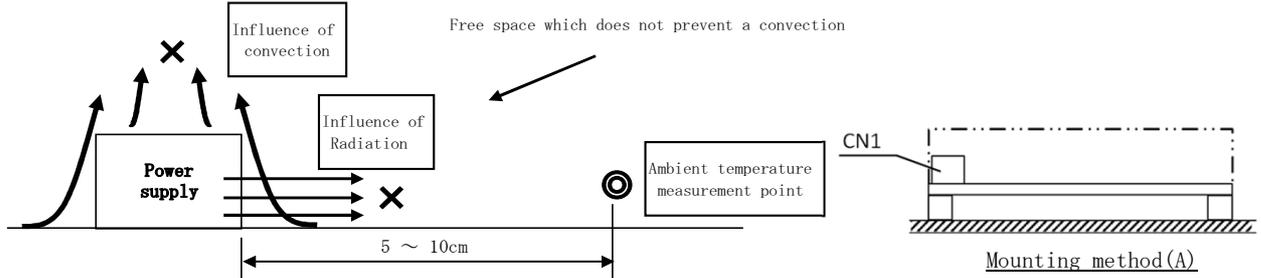

With the ambient temperature of graph, it measures in the environment of a figure.