



DATA SHEET		Date	19-Jul-21
Model	WBA150B-12	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	R.Takahashi

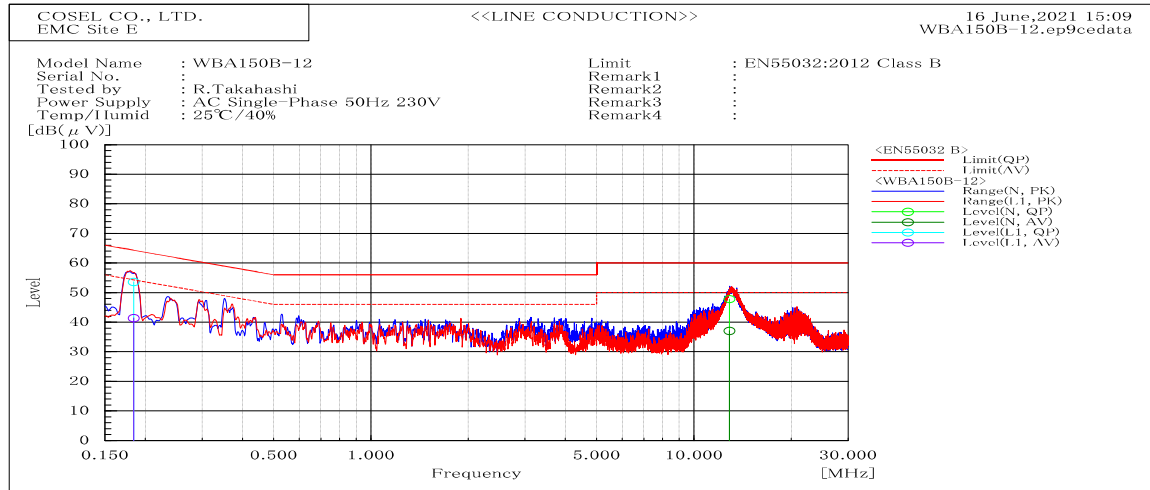


Frequency	Line	Level		Limit		Margin		Pass/Fail	Remark
MHz		dB(μV)		dB(μV)		dB			
		QP	AV	QP	AV	QP	AV		
0.184	L1	53.6	41.4	64.3	54.3	10.7	12.9	Pass	
12.882	N	47.8	37	60	50	12.2	13	Pass	

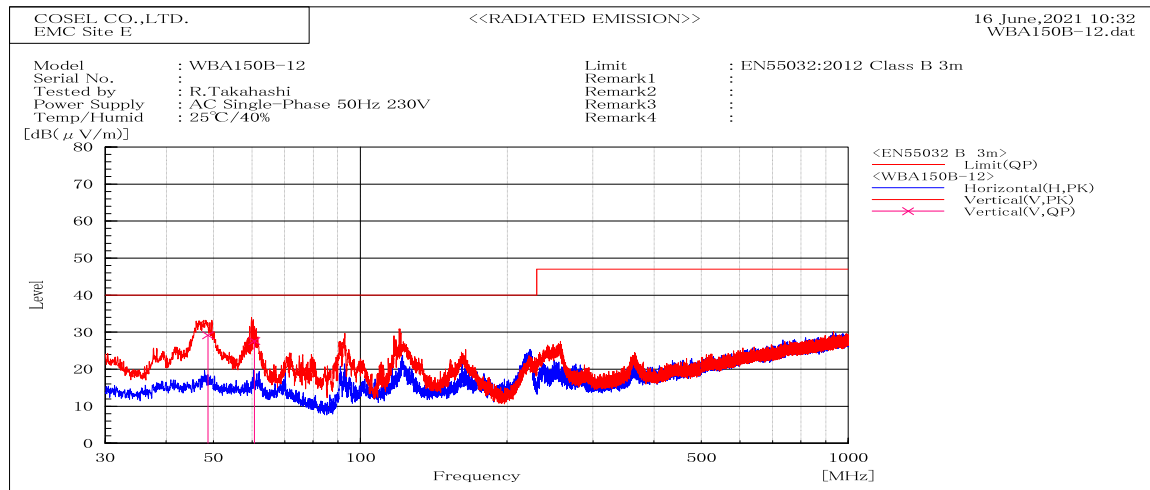


Frequency MHz	Polarization	Stability	Level	Limit	Margin	Pass/Fail	Height cm	Angle deg	Remark
			dB(μV/m) QP	dB(μV/m) QP	dB QP				
60.693	V	Stable	27.6	40	12.4	Pass	100.2	338.1	
48.699	V	Stable	29.2	40	10.8	Pass	100.2	230.6	

DATA SHEET		Date	19-Jul-21
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	R.Takahashi

## 1. Line conduction

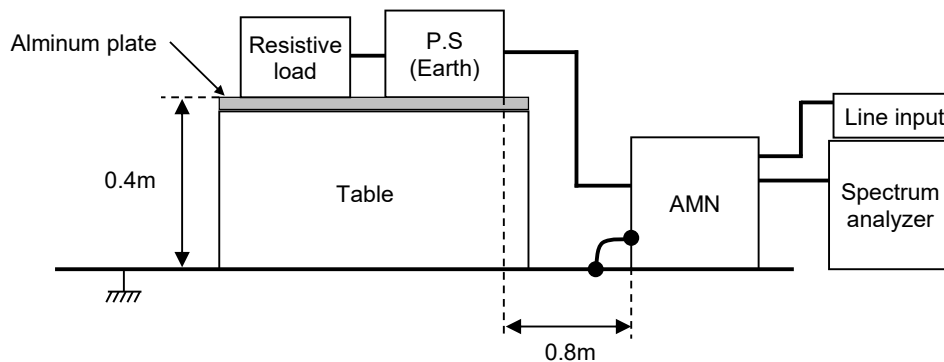

## 2. Radiated emission

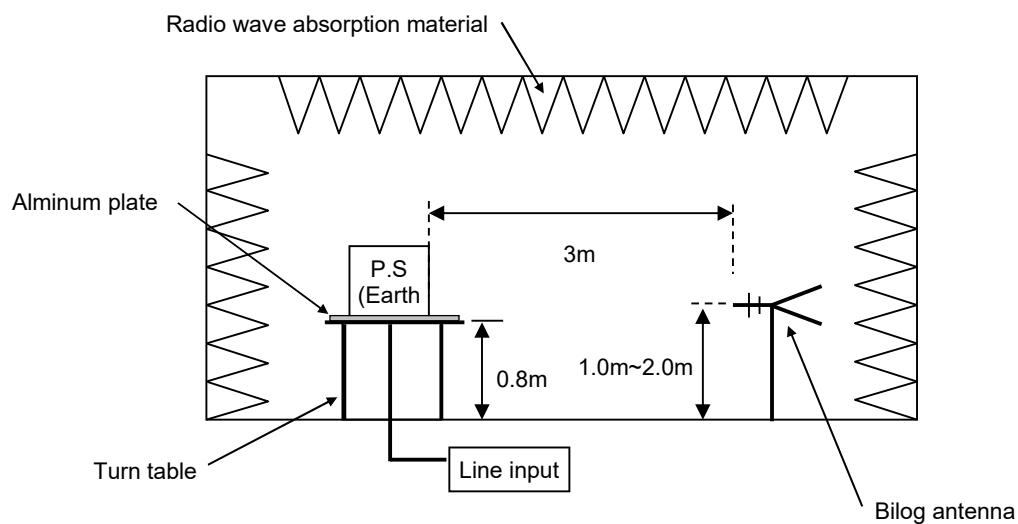


## Conditions

Test : EMI  
Model Name: WBA150B

## ○Photographs of Test Set-Up

### 1. LINE CONDUCTION

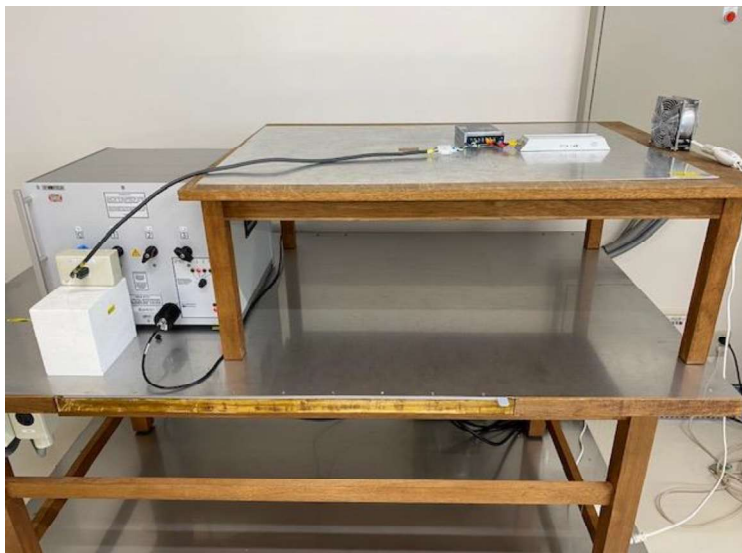

### 2. RADIATED EMISSION

