



DATA SHEET		Date	19-Jul-21
Model	WBA150B-24	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	R.Takahashi

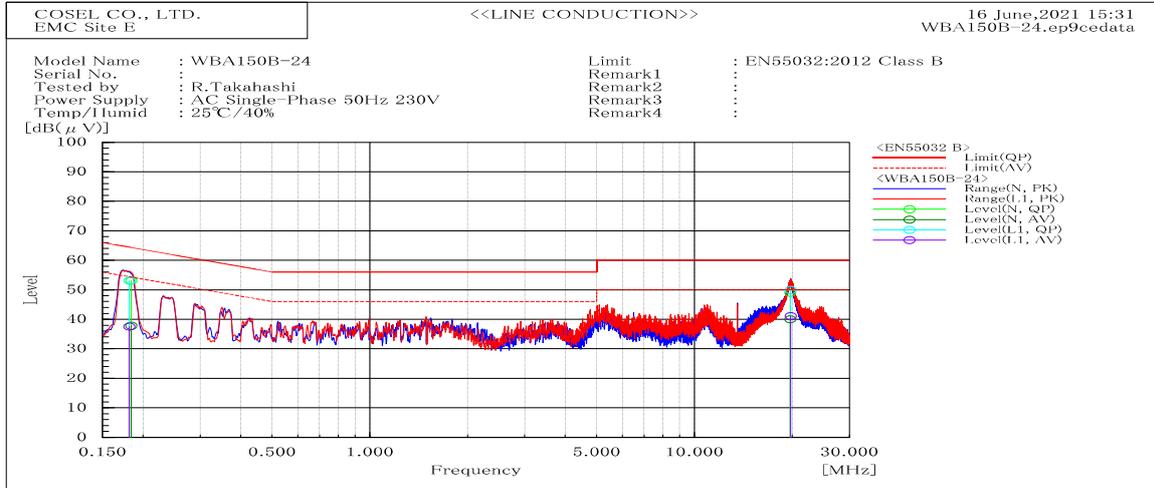


Frequency MHz	Line	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/Fail	Remark
		QP	AV	QP	AV	QP	AV		
		0.181	L1	53.1	37.5	64.4	54.4		
19.798	L1	49.9	41.1	60	50	10.1	8.9	Pass	
0.184	N	53.1	37.8	64.3	54.3	11.2	16.5	Pass	
19.73	N	49	40	60	50	11	10	Pass	

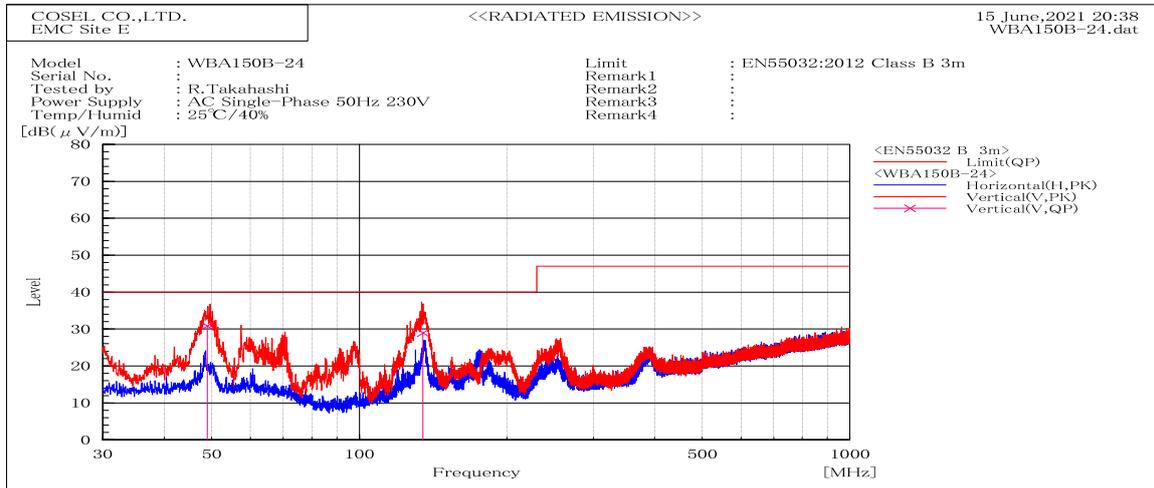


Frequency MHz	Polarization	Stability	Level dB(μV/m)		Margin dB	Pass/Fail	Height cm	Angle deg	Remark
			QP	QP					
48.994	V	Stable	30.8	40	9.2	Pass	100.2	100.6	
134.66	V	Stable	29	40	11	Pass	100.4	4.3	

DATA SHEET		Date	19-Jul-21
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	R.Takahashi

1. Line conduction

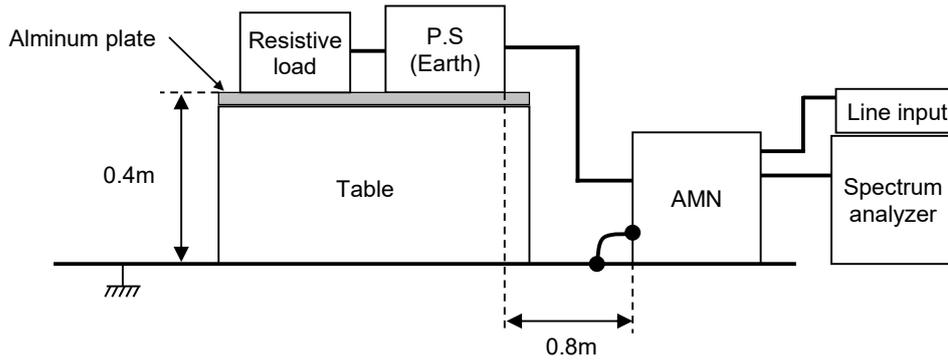

2. Radiated emission

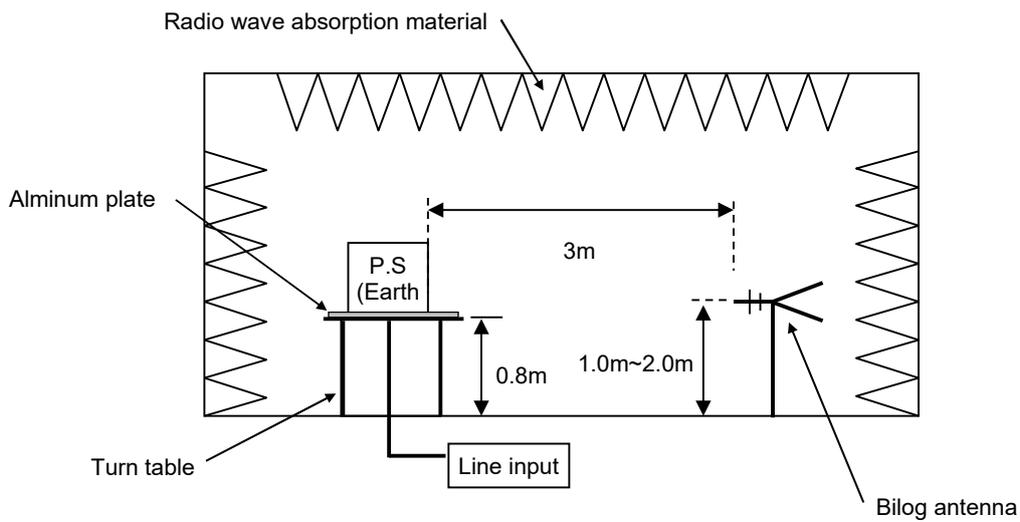

Conditions

Test : EMI
 Model Name: WBA150B

○ Photographs of Test Set-Up

1. LINE CONDUCTION



2. RADIATED EMISSION

